

Portable Power Pack

Power Converter is Powered by Makita portable power pack PDC1500, PDC1200 and PDC01

PDC1500

Powered by 36V-40Vmax built-in battery
1,500Wh-class high capacity



Charger **DC4001**
Charging time
PDC1500: 450 min.
PDC1200: 360 min.

PDC1200

Powered by 36V-40Vmax built-in battery
1,200Wh-class high capacity



PDC01

Powered by up to four 18V LXT batteries

432 Wh high capacity
(with 4 pcs. of BL1860B)

When using PDC01, the power converter will be automatically turned off if the LXT battery in use shifts to another one. In this situation, press a desired output button to restart output.



Power Converter BAC01 Power converter only



AC output
50/60 Hz switchable
with pure sine wave

Max output*
2,800 W(VA)
*Rating value for 4 seconds

Continuous rating output
1,400 W(VA)

Portable Power Pack or MAKPAC can be connected onto this power converter for increased portability.



Accessories (optional)

MAKPAC trolley
This smart design allows for easy transportation of this power converter on MAKPAC trolley.

Part No. TR00000002



BAC01

Power Converter

• Turns DC power into AC power is optimal for a wide range of applications



AC Output Voltage	230 V
Energy Capacity	1,206 Wh with PDC1200
Continuous Rating Output	1,400 W Inverter capacity 1,400 W with PDC1200 750 W with PDC01
Max Output	2,800 W
Dimensions (L x W x H)	395 x 345 x 163 mm (15-1/2 x 13-5/8 x 6-3/8")
Net Weight	7.3 - 16.2 kg (16.1 - 35.7 lbs)



*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my



Output port



**Output voltage and outlet shape vary depending on the country.

The device, which converts DC power into AC power, is optimal for a wide range of applications.

For emergency power source



For where AC outlet is not available




For outdoor leisure activities



Equipped with various output terminals

Output indicator

- indicates output load status in 7 levels, allowing user to:
- understand compatible appliances.
 - reduce the chance of unexpected stop of power output for protection against overload.

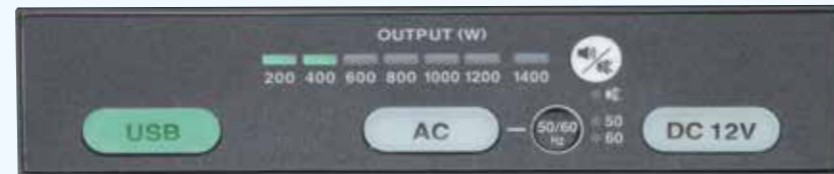

Frequency switching button
50/60 Hz switchable, with pure sine wave

Beep sound button
This warning function can be disabled.

DC 12V output button

AC output button

USB output button

Carrying handle



1 USB output
Type-A x2
DC5V/ 2.4A

2 USB output
Type-C x2
USB-PD 30W

3 AC output
x2
Output voltage and outlet shape vary depending on the country.
Continuous rating output: 1,400W (VA)
Max output: 2,800W (VA)*

4 DC output
Cigar socket
12V/ 10A

*Rating value for 4 seconds (with PDC1200, PDC1500)

Approximate continuous run time or operating cycle*

*The time and cycle are approximate values calculated based on the catalog values of each appliance, which may vary greatly depending on environmental temperature and usage.

Appliance/ Device	iPhone14	Charger (DC40RA)	Charger (DC18RF)	LED stand worklight	Stand fan
Continuous rating input	—	310W	330W	120W	48W
Power source	PDC1500	71times	10times (BL1860B)	10hours	25hours
	PDC1200	57times	7times (BL4040)	8hours	20hours
	PDC01** (BL1860Bx4)	19times	—	2.3hours	5.5hours

Appliance/ Device	Compact refrigerator (137L)	Electric kettle (0.8L)	Household microwave (500W)	4K LCD TV (50 inch)	
Continuous rating input	112W	1,375W	920W	126W	
Power source	PDC1500	11hours	14times (4 min per one time)	15times***	10hours
	PDC1200	9hours	11times (4 min per one time)	12times***	8hours
	PDC01** (BL1860Bx4)	2.4hours	—	—	2hours

** When using PDC01, the power converter will be automatically turned off if the LXT battery in use shifts to another one. In this situation, press a desired output button to restart power output. Each time shown above is a total time including the time it took after the restart.

***On the assumption that it takes 5 minutes to cook a dish.