Makita®



New

Product

VC015G
Cordless Vacuum Cleaner

BL MOTOR AWS

Max Suction Power
90 W
Ø 28-3.5 m hose

Standard Equipment : Dust Bag Assembly Set



High Capacity
18 L
Dust Bag

3 suction power mode change with Mode memory function

VC015GZ

Cordless Vacuum Cleaner

40Vmax

VC015G

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah




Standard Equipment:
Hose, Front cuff, Dust bag, Shoulder belt, Blower nozzle

• GZ: Without Charger & Battery

3 BL MOTOR AWS

Capacity	Dust Bag: 18 L
Max Air Flow	4.0 m³/min
Max Sealed Suction	10.5 kPa
Suction Power	Powerful : 90 W I Normal : 40 W Eco : 15 W with Ø 28-3.5 m hose
Dimensions (L x W x H)	276 x 175 x 196 mm (10-7/8 x 6-7/8 x 7-3/4")
Net Weight	2.3 kg (5.1 lbs)
Continuous Usage Time (approx.)	Powerful : 11 min I Normal : 28 min Eco : 60 min with Ø 28-3.5 m hose with BL4025

DDF491
Cordless Driver Drill



Usable even without attachments
A C-form driver bit is securely held by a built-in magnet



Standard Equipment :
Drill Chuck Attachment







Max Fastening Torque
65 N·m

4 tools in 1

DDF491ZJ01 | DDF491Z 13 mm (1/2")

Cordless Driver Drill

18V

DDF491

Standard Equipment:
Hook, Phillips Bit, Drill Chuck Attachment

- ZJ01 : Hex Bit Attachment (1918F3-6), Offset Attachment (1918F5-2), Angle Attachment (1918F6-0) With 1x Makpac Connector Box, Without Charger & Battery
- Z : Without Charger, Battery & Carrying Case

*Not applicable for Z model

For DDF491ZJ01 only





Capacity	Steel: 13 mm (1/2") I Glass: 12 mm (15/32") Wood (Drill bit): 20 mm (13/16") Wood (Auger bit): 38 mm (1-1/2") Siding board: 70 mm (2-3/4") I Hole saw: 51 mm (2")
Chuck Capacity	13 mm (1/2")
No Load Speed (RPM)	High: 0 - 1,900 I Low: 0 - 500
Max Fastening Torque	Hard: 50 N·m (440 in.lbs.) Soft: 27 N·m (240 in.lbs.)
Max Torque	65 N·m (580 in.lbs)
Dimensions (L x W x H)	186 x 81 x 255 mm (7-3/8 x 3-3/16 x 10") with Drill Chuck attachment
Net Weight	1.8 kg (4.0 lbs.)

DTW210
Cordless Impact Wrench



12.7 mm (1/2") Square drive, C ring, with Pin hole



Twin LEDs with preglow and afterglow functions

Max Fastening Torque
250 N·m

Nut-Busting Torque
400 N·m



DTW210WVE | DTW210Z 12.7 mm (1/2")

Cordless Impact Wrench

18V

DTW210

C ring






- WVE : (LXT Basic) 1x Standard Charger, 2x 2.0Ah Battery, With Carrying Case
- Z : Without Charger, Battery & Carrying Case

*Not applicable for Z model

Fastening Capacities	Standard Bolt: M5 - M16 (3/16 - 5/8") High Tensile Bolt: M5 - M14 (3/16 - 9/16")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,300
Impacts Per Minute (IPM)	0 - 3,200
Max Fastening Torque	250 N·m (180 ft lbs) with BL1860B 230 N·m (170 ft lbs) with BLB182
Nut-Busting Torque	400 N·m (300 ft lbs) with BL1860B 350 N·m (260 ft lbs) with BLB182
Dimensions (L x W x H)	130 x 81 x 233 - 250 mm (5-1/8 x 3-3/16 x 9-1/8 - 9-7/8")
Net Weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)

SC001G
Cordless Steel Rod Cutter



Minimizes debris scattering during cutting



360° rotatable head for flexible positioning on-site



Cutting Speed 1.7 sec — Cuts Ø 16 mm rebar

Lightweight 6.0 kg — with BL4025

SC001GZK

Cordless Steel Rod Cutter

40Vmax

SC001G

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah, 8.0Ah (H)




Standard Equipment:
Wrench, Hex Wrench

• GZK: With Carrying Case, Without Charger & Battery


Cutting Capacity	Dia.: 3 - 16 mm (1/8 - 5/8")
Cutting Speed (sec)	1.7
Dimensions (L x W x H)	321 x 103 x 285 mm (12-5/8 x 4-1/16 x 11-1/4")
Net Weight	6.0 - 7.2 kg (13.2 - 15.9 lbs)
Work Amount (approx.)	250 pcs with BL4025 Cutting (Rebar Ø 16 mm)

PP001G
Cordless Hole Puncher

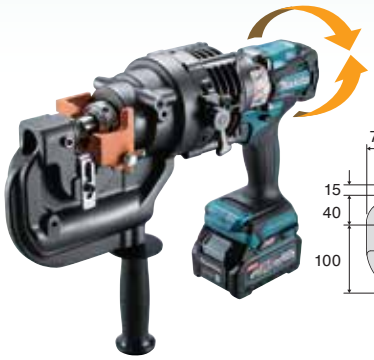


360° rotatable motor section

(Unit: mm)



Max Punching Capacity
Ø 20 t9 mm
Ø 19 t10 mm
General steel (SS400)



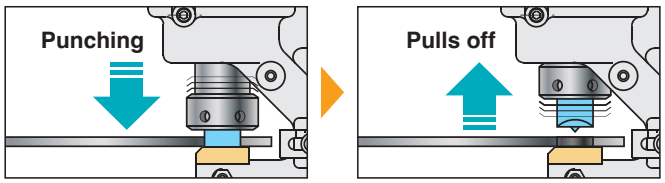

After a punching cycle is completed, hydraulic pressure automatically pulls off the punch from workpiece and returns it to the initial position to enable efficient continuous hole punching.

PP001GZK

Cordless Hole Puncher

40Vmax

PP001G

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah, 8.0Ah (H)



Standard Equipment:
Punch, Die, Bar for Fastening Nuts, Hex Wrench, Wrench

• GZK: With Carrying Case, Without Charger & Battery

Cutting Capacity	General steel : Ø 20 (thick 9 mm) Stainless steel : Ø 20 (thick 6 mm)
Dimensions (L x W x H)	398 x 129 x 315 mm (15-5/8 x 5-1/8 x 12-3/8")
Net Weight	11.6 - 12.8 kg (25.6 - 28.2 lbs)

VP001G
Cordless Vacuum Pump



Compression Method
2 stage

Ultimate Vacuum
3 Pa







Battery capacity warning function



Cap for the oil filling and air exhaust port
(with a built-in glass filter)

VP001GZ

Cordless Vacuum Pump

40Vmax

VP001G

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah, 8.0Ah (H)



Standard Equipment:
Vacuum Pump Oil

• GZ: Without Charger & Battery

Flow Rate	57 L/min (2 CFM Class)
Motor Speed	3,500 min⁻¹
Oil Tank Capacity	160 - 190 mL
Inlet Port	1/4" I 5/16"
Dimensions (L x W x H)	296 x 94 / 125 x 180 mm (11-5/8 x 3-11/16 / 4-7/8 x 7-1/8")
Net Weight	4.4 kg (9.7 lbs)
Continuous Usage Time (approx.)	170 min with BL4040

DVP281Z

Cordless Vacuum Pump

18V

DVP281



Standard Equipment:
Vacuum Pump Oil

• Z: Without Charger & Battery

Flow Rate	57 L/min (2 CFM Class)
Motor Speed	3,500 min⁻¹
Oil Tank Capacity	160 - 190 mL
Inlet Port	1/4" I 5/16"
Dimensions (L x W x H)	288 x 125 x 180 mm (11-3/8 x 4-7/8 x 7-1/8")
Net Weight	4.1 kg (9.0 lbs)
Continuous Usage Time (approx.)	130 min with BL1860B

