



GENERAL CATALOGUE 2026



40 Vmax | 80 Vmax

Index

SCREWING / DRILLING	20 - 42
STIRRING	43 - 44
HAMMER DRILLING / CHISELLING	45 - 52
GRINDING / SANDING / POLISHING	53 - 69
CUTTING	70 - 82
SAWING	83 - 92
MILLING / PLANING	93 - 96
FASTENING / FIXING	97 - 99
CLEANING	100 - 118
LAWN CARE / GRASS CARE	119 - 127
TREE CARE / HEDGE CARE	128 - 135
TRANSPORTATION	136 - 137
LIGHTS	138 - 145
COMFORT / LIFESTYLE	146 - 148
SPECIALITY TOOLS	149 - 152
ACCESSORY	153 - 198
 mit	199 - 202

1	
1805N	95
1911B	96
2	
2012NB	96
2107F	78
2416S	75
2704	84
2712	84
3	
3709	94
4	
4100KB	70
4100NH	71
4100NH2Z	70
4100NH3Z	70
4107R	71
4114S	74
4327	90
4327M	90
4350CT	90
4403	94
5	
5008MG	87
5402	87
5806B	86
6	
6305	31
6413	31
6906	38
6922NB	40
6924N	39
9	
9031	69
9035H	68
9237C	63
9404	69
9556HNG	55
9556HPG	55
9558HPG	58
A	
AC001GZ	149
ADP001G (TWAADP001G)	153
ADP05 (AUBADP05)	153
AS001GA105/ GZ03	115

B	
BAC01	18
BCC01 	18
BCC02 	18
BO001CGZ	66
BO003CGZ	66
BO005CGZ	67
BO006CGZ	67
BO007CGZ 	67
BO3710	68
BO4510H	68
BO4556	68
BO5031	67
BO5041	67
BO6050J	66
BS001GZ01	69
C	
CA5000X	74
CC301DZ	70
CE001GZ01	74
CE002GZ	74
CE004GZ	74
CF003GZ	146
CF101DZ	146
CG100DZA	151
CL001GZ04/ GZ10	107
CL002GZ03/ GZ07	108
CL003GA103/ GA106/ GZ04/ GZ10/ GZ	109
CL004GZ 	108
CL106FDWYW	109
CL107FDWYW	110
CL108FDWYW/ FDZW	110
CL121DZ	107
CP100DZ	77
CS002GZ	71
CW003GZ	148
D	
DA001GZ	31
DA3010F	32
DA332DZ	32
DAS180Z	115
DBN601Z 	98
DBO180Z	66
DBO380Z	68

DBO481Z	68
DBS180Z	69
DCC500Z	70
DCF102Z	146
DCF203Z	146
DCG180RFE/ ZB	151
DCL180FRFW/ RFB/ ZB/ Z	109
DCL184Z	107
DCL284FZB/ FZW	109
DCL286FRFB/ FZB	109
DCO180Z	96
DCS552Z	71
DCS553Z	71
DCU180Z	136
DCU601Z	136
DCU603Z	136
DCU605Z	136
DDA351Z	32
DDA450Z	32
DDA460ZK	32
DDF482RFE/ Z	24
DDF484Z	24
DDF486RTE/ Z	22
DDF487Z	24
DDF489RTJ/ Z	23
DDF490SF1J/ WV/ Z 	23
DDG460ZX7	40
DF001GD201/ GZ	21
DF002GA201/ GZK/ GZ	21
DF012DSE	26
DF033DZ	25
DF330DWE	26
DF332DZ	25
DF333DWAE/ DWYE/ DZK/ DZ	25
DFN350Z	98
DG001GZ05	40
DG002GZ 	40
DGA402RFE/ Z	54
DGA404RFE/ RTE/ Z	54
DGA405RFE/ Z	55
DGA406Z	54
DGA408RFE/ RME/ Z	55
DGA411Z	54
DGA418Z	55
DGA505Z	57

-  Double Insulation
-  Variable Speed
-  Brake
-  Reversing

-  Mechanical 2-Speed
-  Electronic 2-Speed
-  Electronic 3-Speed
-  Electronic 4-Speed

-  Keyless Chuck
-  Torque Setting 6
-  Torque Setting 9
-  Torque Setting 16

-  Torque Setting 18
-  Torque Setting 20
-  Torque Setting 21
-  SDS-PLUS Shank

DGA508Z	57	DML801 (DEBDML801)	141	DTD156RF/ Z	29	DUT130Z	44
DGA518Z	57	DML805 (GBDDML805)	139	DTD157Z	29	DUX18RGX4/ Z	125
DGD800Z	64	DML807 (AUBDML807)	141	DTD173RTJ/ Z	29	DUX60Z	125
DGD801Z	65	DML808 (AUADML808)	140	DTL063Z	38	DVC155LZX3	101
DGP180RT/ Z	150	DML811 (GBDDML811)	139	DTM51RFEX8/ Z	82	DVC157LZX5	101
DHG180ZK	152	DML814	139	DTM52RTJX1/ Z	82	DVC261Z	105
DHG181ZK	152	DML815 (AUADML815)	140	DTR180ZJ	97	DVC560Z	107
DHP458RFE/ Z	22	DML816X	141	DTR181ZJ	97	DVC660Z	105
DHP482RFE/ Z	24	DML817	142	DTW1001JX2/ JX3/ ZX2	35	DVC750LZX3	104
DHP484RFX6/ RME/ Z	23	DML818	138	DTW1002JX2/ JX3/ JX4/ ZX2	36	DVC860LZ	102
DHP486RTE/ Z	22	DMP180Z	148	DTW1005ZX1	NEW 35	DVC862LZ	102
DHP487RAJ/ RFJ/ Z	24	DMP181Z	147	DTW181RFE	37	DVC863LZ	101
DHP489RTJ/ Z	23	DP4021	NEW 31	DTW190RFX2/ ZX	37	DVC864LZ	101
DHP490SFX1/ WVE/ Z	NEW 23	DPB182Z	77	DTW300RTJ/ Z	36	DVC865LZX3	101
DHR182ZWJ	48	DPB184Z	77	DTW301Z	36	DVP180Z	150
DHR183RTWJ/ Z	48	DPJ180Z	94	DTW700TJX1/ ZX1	36	DVP181ZK	150
DHR202RFE/ Z	47	DPO600Z	66	DTW701TJX1/ ZX1	36	DVR450Z	43
DHR241RFE	47	DPP200ZK	78	DUA200Z	132	DWR180Z	38
DHR242RFE/ RTE/ Z	47	DPT353Z	98	DUA301ZB	132	DWT310ZK	39
DHR282Z	47	DPV300Z	63	DUB184RT/ Z	113	E	
DHS661Z	86	DRC200Z	106	DUB185Z	113	ELM3320	120
DHS680RFJ/ RMJ/ Z	86	DRC300Z	105	DUB186Z	113	ELM3720	120
DHW080ZK	117	DRT50ZJX9/ Z	93	DUB187Z	113	F	
DHW180Z01	118	DRT52Z	93	DUB363ZV	113	FN001GD101/ GZ	97
DJN161Z	78	DRV150Z	97	DUC101Z	131	FS2500	40
DJR183Z	92	DRV250Z	97	DUC150RT/ Z	NEW 130	G	
DJR186RFE/ Z	91	DS4012	31	DUC254Z001	129	GA003GM201/ GZ	53
DJR187RFE/ Z	91	DS5000	31	DUC307Z	129	GA005GM201/ GZK/ GZ	56
DJR188Z	91	DSC121ZK	76	DUC353Z	129	GA011GM201/ GZ	53
DJR189Z	91	DSC162Z	76	DUC356Z	129	GA013GM201/ GZK/ GZ	56
DJS161Z	78	DSC163ZK	76	DUC406Z	129	GA021GZK	53
DJV180RFJ/ Z	88	DSC191Z	76	DUH506Z	133	GA023GZK/ GZ	56
DJV181Z	88	DSC251ZK	76	DUH507F001/ Z	133	GA027GM201/ GZ	53
DJV182RFE/ Z	88	DSL800Z	68	DUH601Z	133	GA029GZK/ GZ	57
DJV184RFJ/ Z	89	DSP600Z	87	DUM111SYX	127	GA035GZ	58
DJV185Z	89	DST121ZK	99	DUM604Z	127	GA036GZ	59
DJV186Z	NEW 89	DTC100ZK	79	DUN461WZ	134	GA037GZK/ GZ	59
DKP180RFE/ Z	95	DTC101ZK	79	DUN500WZ	134	GA038GZK/ GZ	60
DKP181Z	95	DTC102ZK	79	DUP361Z	134	GA048GZ	54
DLM230Z	120	DTC103ZK	80	DUR189Z	123	GA055GZ	NEW 56
DLM330Z	120	DTC104ZK	NEW 80	DUR191LRT2	123	GA4030	55
DLM382Z	119	DTC301ZK	NEW 81	DUR192LST/ LZ	124	GA4031	55
DLM466Z	NEW 119	DTC302ZK	NEW 81	DUR193Z	124	GA4034	56
DLW140Z	75	DTC303ZK	NEW 81	DUR194ZX1	123	GA4040C	55
DMC300Z	77	DTD152RFE/ Z	29	DUS054Z	135	GA5010	58



SDS-MAX Shank



17 mm Hex Shank



30 mm Hex Shank



21 mm Hex Shank



28.6 mm Hex Shank



Torque Limiter



Constant Speed



Soft Start



Bevel Cutting L45 R5



Bevel Cutting 45 left



Bevel Cutting 45 LR



Orbital Cutting



Makita Shank Jig Saw Blade



Bayonet Shank Jig Saw Blade



Laser Marker



Hook & Loop

GA5020	58	HP002GA201/ GD201/ GZ	21	JS1601	78	PB002GM201/ GZ	77
GA5030	58	HP1630	51	JS1602	78	PC5000C	96
GA5040	58	HP330DWE	26	JS3201	79	PC5010C	96
GA5091X02	57	HP332DZ	25	JV001GZ	88	PJ7000	95
GA5092X02	58	HP333DWAE/ DWYE/ DZK/ DZ	25	JV002GZ	88	PM001GZ	135
GA5095	NEW 58	HR001GM201	46	JV0600K	90	PO5000C	66
GA6010	59	HR002GM201	46	JV101DWAE/ DZ	90	PS001GZ	NEW 118
GA7020	59	HR003GM201/ GZ	46	JV103DZ	90	PT001GZ	98
GA7050	60	HR005GZ	45	K		PT354DZ	98
GA7070	59	HR006GZ	45	KP001GM201/ GZ	95	PV001GZ	63
GA7082	59	HR007GZ	45	L		PW5001C	63
GA7090	59	HR008GM201/ GZ	45	LB1200F	87	R	
GA9020	60	HR010GD201/ GZ	46	LC1230	72	RP001GZ	94
GA9050	60	HR166DSMJ/ DZK/ DZ	48	LH1201FL	84	RP0900	94
GA9070	60	HR2470X5	49	LM002GZ	119	RP2303FC05	NEW 94
GA9082	60	HR2652	49	LM004GZ	119	RT001GZ23	93
GA9090	60	HR2670X5	49	LS002GZ	83	RT0700C/ CX2	93
GB602	66	HR2810	49	LS003GZ	83	S	
GB801	66	HR3001CJ	49	LS004GZ	83	SC103DZJ	76
GD001GZ	NEW 64	HR3011FCJ	49	LS0714	84	SG1251J	74
GD002GZ	NEW 64	HR3200C	49	LS1018L	84	SJ401	92
GD0600	65	HR3210C	49	LS1019L	83	SP001GZ02	87
GD0601	65	HR4002	48	LS1040	84	SP6000J	87
GD0603	65	HR4013C	48	LS1110F	84	ST002GZ	99
GD0800C	65	HR4511C	48	LS1219L	83	T	
GD0801C	65	HR5212C	48	LW1401	75	TD003GA201/ GZ	29
GP001GZ	NEW 149	HS004GM201/ GZ	85	M		TD004GZ	NEW 28
GS5000	65	HS009GZK/ GZ	85	ML001G (AUAML001G)	140	TD0101F	30
GV7000C	63	HS011GT201/ GZ	85	ML002G (TWAML002G)	140	TD022DSE	30
H		HS012GZ	85	ML005GX	138	TD090DWE	30
HG001GZ02	NEW 151	HS013GZ	NEW 85	ML006GX	141	TD110DWAE/ DWYE/ DZK/ DZ	30
HG5030	152	HS0600	87	ML007G (TWAML007G)	139	TD111DZK/ DZ	30
HG5030K	152	HS301DWAE/ DZ	86	ML009GX	138	TL064DZ	31
HM001GZ	50	HS6600	86	ML011G	142	TL065DZ	39
HM002GZ03	49	HS7010	86	ML012G	138	TM001GZ01	82
HM004GZ05	50	HS7600	86	ML104 (AUAML104)	141	TM3000C	82
HM0810TA	50	HW001GZ	116	ML106 (AUAML106)	140	TM3010CX6	82
HM0870C	50	J		ML107	142	TM30DZ	82
HM0871C	50	JN1601	79	MLT100	84	TW001GM204/ GZ02	34
HM1201	50	JN3201	79	MP001GZ	147	TW002GM201/ GZ	35
HM1213C	50	JR001GZ	91	MP100DZ	148	TW005GD201/ GZ	35
HM1306	50	JR002GM201/ GZ	90	N		TW007GM204/ GZ02	35
HM1317C	51	JR105DWAE/ DZ	92	N1900B	96	TW009GZ	34
HM1501	51	JR3051TK	92	N5900B	87	TW010GZ	34
HP001GD201/ GZ	21	JR3070CT	92	P		TW011GZ02	NEW 34

- Depth Adjustment
- Anti Vibration
- Automatic Oiling
- Chain Brake

- Stainless Tank
- Revolving Hose
- Static Free Hose
- Dust Collecting

- Built-in Job Light
- Wooden Carrying Case
- Carrying Case
- Makpac Connector Box

- Auto Firing Stop
- Clutch-equipped
- Anti-restart Function
- Reverse Rotation

TW0350	38	VC001GLZ	100		M0400B	201
TW1000	37	VC002GLZ	100		M0600B	199
TW160DZ	37	VC005GLZ	100		M0801B	200
TW161DZ	37	VC006GMZ03	100		M0900B	200
U		VC008GZ	105		M0910B	200
UA003GM102/ GZ01	131	VC009GZ	105		M1902B	202
UA004GM102/ GZ01	131	VC010GZ NEW	106		M2300B	201
UB001CZ	112	VC011GZ	104		M2401B	201
UB001GM101/ GZ	112	VC013GLZ NEW	104		M2403B	201
UB002GZ NEW	112	VC2000L	102		M3600B	202
UB004CZ	112	VC2510L	102		M3601B	202
UB100DZ	114	VC3210L	102		M3700B	202
UB101DZ	114	VR001CZ	43		M3701B	202
UB1103	114	VR001GZ	43		M3702B	202
UC004GM101/ GZ	128	VR002CZ	43		M4000B	202
UC016GT101/ GZ	128	VR003CZ	43		M4001B	202
UC022GZ	128	VR004CZ	43		M4100B	201
UC029GZ NEW	130	VS001GZ	107		M4301B	201
UC030GZ NEW	128	W			M4302B	202
UC100DZ	131	WR100DWA/ DZ	38		M4501B	202
UC3541A	130	WT001GZ	39		M5801B	201
UC4041A	130				M6001B	199
UC4051A	130				M6200B	199
UH004GZ	132				M6501B	199
UH006GM201/ GZ	132				M6600XB	199
UH014GM101/ GZK/ GZ	132				M8100B	200
UH020GZ	133				M8103B	199
UH353DZ	133				M8600B	199
UM600DZ	127				M8701X3B	199
UN001GZ	134				M9000B	200
UP100DZ	134				M9002B	200
UR003GZ	123				M9200B	200
UR007GZ01	122				M9201B	200
UR008GM101/ GZK01/ GZ01	122				M9202B	200
UR012GZ02	122				M9204B	201
UR014GZ	122				M9400B	201
UR017GZ	123				M9506B	200
UR100DZ	124				M9509B	200
UR201CZ	122				M9512B	200
US053DZ	135				M9513B	200
UT001GZ	44				M9800B	201
UT1305	44					
UV001GZ	120					
UX01GZ	125					
V						



Toolless Blade Change



XGT Battery Series



Max Output
0.9 kW



2.0 Ah BL4020



Max Output
1.1 kW



2.5 Ah BL4025



Max Output
1.5 kW



4.0 Ah BL4040

XGT is a new system with its own tools, batteries, and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.

Optimum power supply system and Optimum charging system


The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.

Tool ↔ Battery ↔ Battery Charger
Digital communication



Optimum Charging System

Auto maintenance system with two cooling fans for providing more optimum fast charging

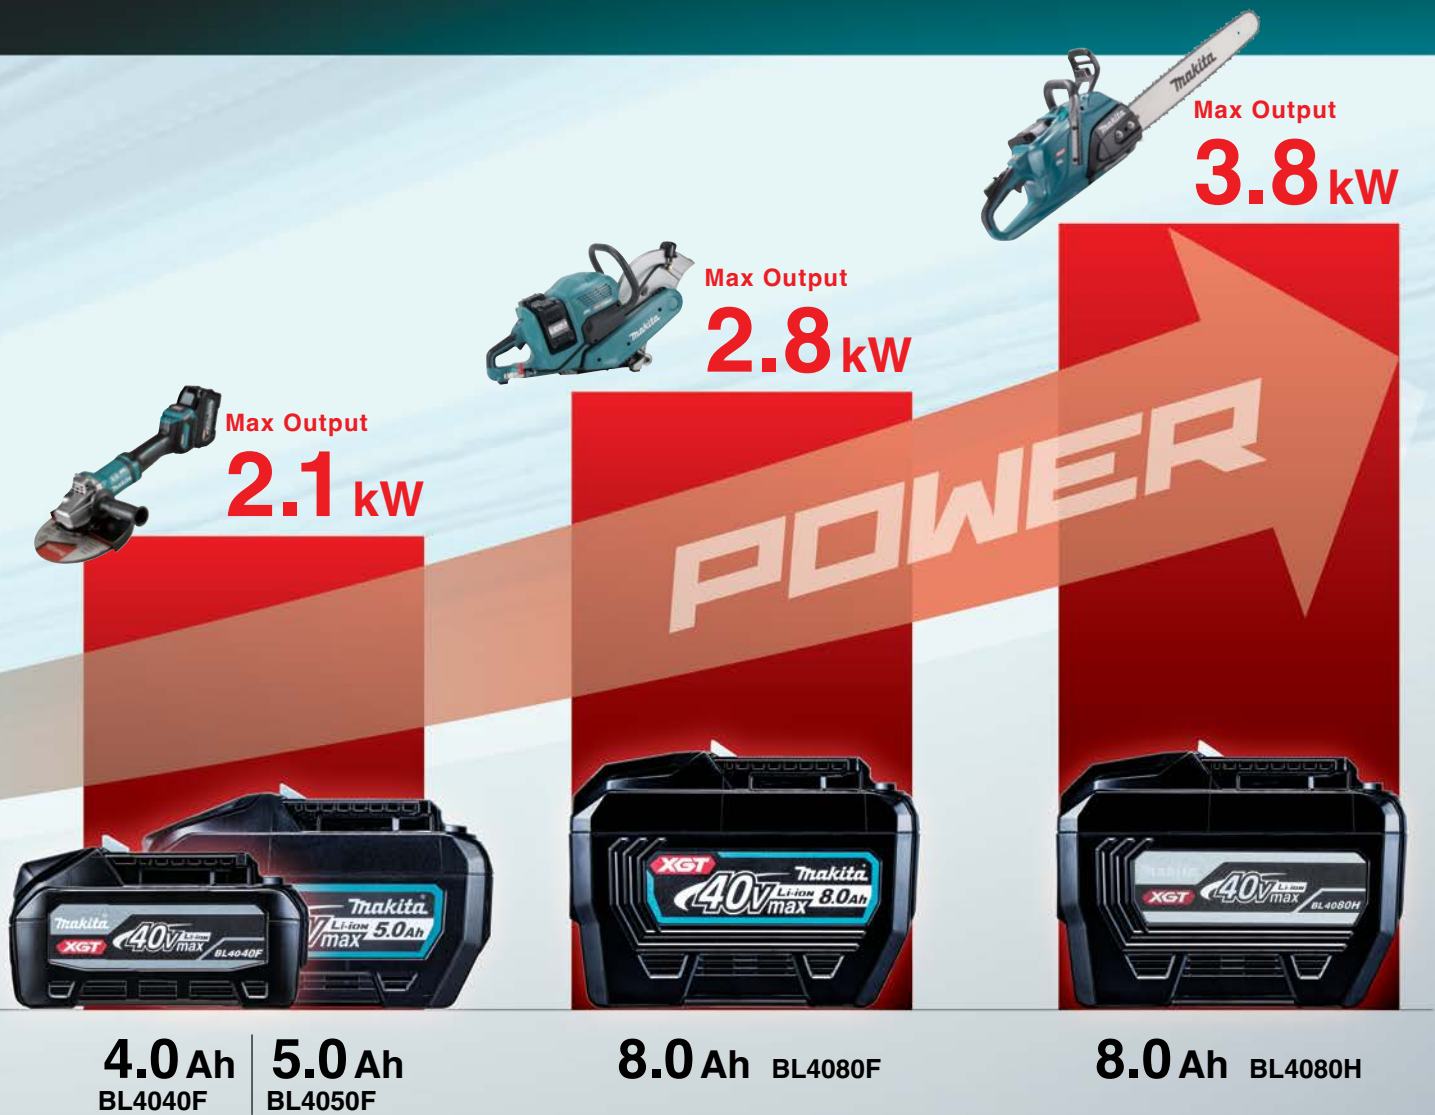


Built Tough

High durability specifications specially designed for 40Vmax Li-Ion batteries

4-LED fuel gauge indicator




Terminal short-circuit prevention structure
The protection wall is provided between terminals against water and dust.

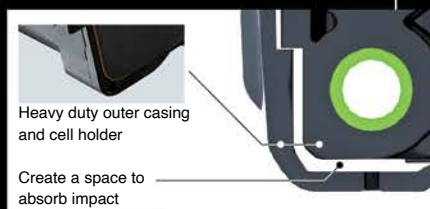

Heavy duty outer casing and cell holder

Create a space to absorb impact

Shock absorption structure

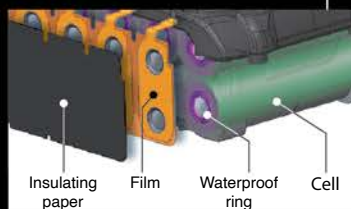


Insulating paper

Film

Waterproof ring

Cell

Waterproof Triple-layer Structure
prevents cell failure due to water and dust.

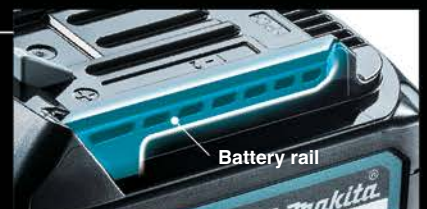

Battery rail

High Rigidity Battery Rails
Durable slide in battery rail that holds the battery and the tools firmly and securely to withstand high power products



High Output Battery Series



BL4040F
[Tab-less]



BL4050F



BL4080F



BL4080H
[Tab-less]



**Unlocks the full
power potential for
certain models.**



**Demonstrates
tenacity even
under heavy load.**

BL4040F Tab-less Battery

Traditional



Higher electrical
resistance

Energy converts
to heat

Leading to
energy loss

Tab-less



Lower electrical
resistance

Energy does not easily
convert to heat

Minimal
energy loss

BL4050F (Traditional)



20 cells
(2P10S)

BL4040F (Tab-less)




10 cells
(1P10S)



Unlocks the full power potential for certain models.

By using the high output battery, the overload indicator setting changes thanks to the smart system, allowing for continuous heavy load work, thereby improving efficiency and unlocking the full power of certain models.

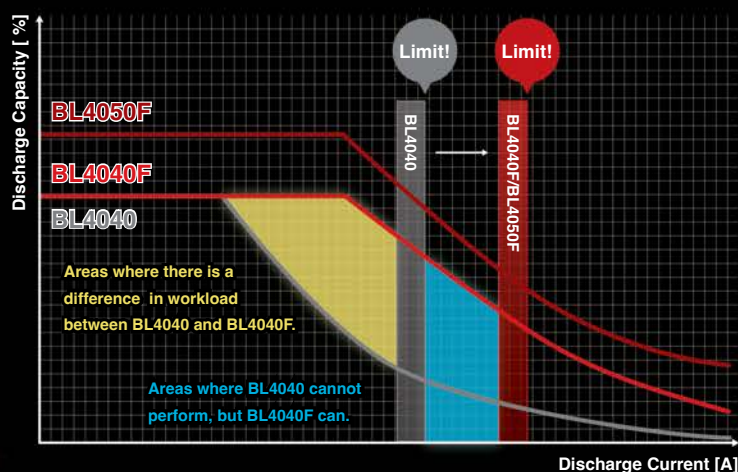

Cordless Chain Saw
UC017G (42cc Class)
Cutting ø300mm cedar log

Standard [BL4040]	9.7 sec.
High Output Battery [BL4040F / BL4050F]	6.9 sec. UP TO 29% FASTER



Demonstrates tenacity even under heavy load.

By using the high output battery, it is less likely to slow down under heavy load, demonstrating tenacity and leading to increased efficiency. Despite having the same battery capacity, the work output per charge with the BL4040F can be higher than the BL4040 under high load conditions.



Cordless Angle Grinder
GA038G (230mm/ 9")
Cutting concrete continuously at depth of 40mm

Work amount per charge

Standard [BL4040]	240 cm
High Output Battery [BL4040F / BL4050F]	410 cm UP TO 71% LONGER

Achieves increased continuous output performance under heavy load, which is equivalent to BL4050F, while maintaining the same size as BL4040.



vs BL4040



36%
MORE POWER



32%
COOLER

vs BL4050F



28%
LESS WEIGHT



32%
MORE COMPACT

XGT**40V^{Li-ion}max****High Power****Durability****Digital
Communication****XGT****40V^{Li-ion}max****XGT X2
80V^{Li-ion}max**

Rotary Hammer

Demolition Hammer

Power Cutter

Breaker

Grass Trimmer

Vacuum Cleaner

BatteryBL4020
2.0AhBL4025
2.5AhBL4040 /
BL4040F
4.0AhJob Site
Speaker

Kettle

Microwave

Inflator

Cooler & Warmer Box

Rotary
Laser

Worklight

Fan

Bar Light

Job Site Radio

Radio with
LanternArea
Worklight

Flashlight

Adapter for USB

Chain Saw

Hedge Trimmer

Pruning Saw

Pole Saw

Scarifier

Lawn
MowerPole Hedge
Trimmer

Edger

Multi Function
Power HeadGrass
Trimmer

Blower

Backpack
Mist Blower



230+
TOOLS

Charger

BL4050F
5.0Ah

BL4080F
8.0Ah

DC40RA

DC40RB

DC40WA

DC40RC

ADP10



Adapter for
LXT Battery





Expand Your Lithium Line Up

12V_{max}
LITHIUM-ION

CXT



64V_{max}
Li-ion

Battery & Charger



Battery 4.0 Ah
BL6440
Part No. 191R06-8
RM 3,061



Battery
fuel gauge



Battery 10.0 Ah
BL64100
Part No. 1911B1-0
RM 6,911

- Assist handle**
- Assists easy installation/ removal of the battery from the lawn mower or battery charger
 - Allows for easy transportation of the battery to job site



Charger
DC64WA
Part No. 191W23-8
RM 980

Battery Adapter BAP001G

*Without Charger & Batteries
Part No. 1913E8-9
RM 607.10



40V_{max}

Compatible Batteries
40V_{max} 2.0 Ah to 8.0 Ah

Battery Adapter BAP182

*Without Charger & Batteries
Part No. 197581-4
RM 1,109.10

**WHILE
STOCK
LAST**



18V x2 **18V**
Compatible Batteries
18V 1.5 Ah to 6.0 Ah

Battery Adapter BAP18C

*Without Charger & Batteries
Part No. 191M50-5
RM 319.90

Specially for cleaner use



18V
Compatible Batteries
18V 1.5 Ah to 6.0 Ah

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Battery & Charger Time Reference, Compatibility Chart

XGT 40Vmax	Fast Charging Fast Charger DC40RA (191E08-6/ 630B66-4) RM 933	Two Port Multi Fast Charger DC40RB (191N14-5) RM 1,645	Standard Charger DC40RC (191M92-9) RM 614	Two Port Multi Charger DC40WA (1911L7-8) RM 773
	8.0 Ah BL4080H (1916T7-4) RM 3,600 NEW BL4080F (191X65-8) RM 2,821	76 min	170 min	420 min
	5.0 Ah BL4050F (191L47-8/ 632R45-4) RM 2,207	50 min	85 min	260 min
	4.0 Ah BL4040F (1910N6-8) RM 2,083 BL4040 (191B26-6/ 632N72-7) RM 1,669	45 min	67 min	210 min
	2.5 Ah BL4025 (191B36-3/ 632N81-6) RM 1,423	28 min	38 min	130 min
	2.0 Ah BL4020 (191L29-0) RM 1,007	22 min	30 min	110 min
LXT Basic 18V	Standard Charger DCB18WA (1915V6-4) RM 120 NEW	90 min		
2.0 Ah BLB182 (1915F4-6) RM 240 NEW				

LXT 18V	Fast Charging Fast Charger DC40RA (191E08-6/ 630B66-4) RM 933 + Adapter ADP10 (191C11-5) RM 454 Compatible with LXT Li-Ion batteries	Standard Charger DC40RC (191M92-9) RM 614 + Adapter ADP10 (191C11-5) RM 454 Compatible with LXT Li-Ion batteries	Fast Charging Rapid Charger DC18RC (195586-8) RM 516 Two Port Multi Rapid Charger DC18RD (196934-4/ 630869-4) RM 969 Dual Port Fast Charger DC18RE (198446-3) RM 821 18V 12Vmax Standard Charger DC18SD (194534-4) RM 473 Charger DC18WC (1910G5-1) RM 359			
	12.0 Ah BL18120 (1915J2-8) RM 1,220 NEW	70 min	175 min	120 min	265 min	325 min
	9.0 Ah BL1890 (1915H4-0) RM 1,000 NEW	59 min	135 min	85 min	200 min	245 min
	6.0 Ah BL1860B (197422-4) RM 988	40 min	85 min	55 min	130 min	160 min
	5.0 Ah BL1850B (197280-8/ 632G59-7) RM 854	35 min	70 min	45 min	110 min	135 min
	4.0 Ah BL1840B (197265-4/ 632F07-0) RM 735	29 min	58 min	36 min	90 min	110 min
3.0 Ah BL1830B (197599-5/ 632G12-3) RM 590	22 min	42 min	22 min	60 min	80 min	
1.5 Ah BL1815N (196235-0) RM 473	15 min	22 min	15 min	30 min	40 min	

CXT 12Vmax	Fast Charging Speed Charger DC10SB (197346-4/ 197370-7/ 630997-5) RM 433 Dual Port Fast Charger DC18RE (198446-3) RM 821 18V 12Vmax Standard Charger DC10WD (197450-9/ 630998-3) RM 316	5.0 Ah BL1050B (1913G0-9) RM 666	76 min	160 min
	4.0 Ah BL1041B (197406-2) RM 478	60 min	130 min	
	2.0 Ah BL1021B (197396-9/ 632F59-1) RM 342	30 min	70 min	
	1.5 Ah BL1016 (197393-5/ 632F55-9) RM 288	22 min	50 min	

PDC1200 (PDC1200A01) RM 14,300	PDC1500 (PDC1500A01) RM 24,240	DC4001 RM 1,400
40Vmax 18V x2	35.5 Ah PDC1200	360 min
	43.55 Ah PDC1500	450 min

40Vmax 18V x2 18V	PDC01 (191A62-6) RM 5,014.40 + PDC01 (191A67-6) RM 4,367.30 + PDC01 (191A67-6) RM 4,367.30 Powered by up to four 18V LXT batteries
--------------------------------------	--

14.4V G-Battery 1.5 Ah BL1415G (198192-8) RM 430	18V G-Battery 1.5 Ah BL1815G (198186-3) RM 430	Standard Charger DC18WA (195424-4) RM 300 70 min
10.8V 1.5 Ah BL1015K (1913U9-9) RM 295	7.2V 1.5 Ah BL0715 (198000-3) RM 369	Standard Charger DC10WA (194589-9) RM 338 55 min
10.8V	7.2V	35 min

14.4V Ni-MH 2.8 Ah 1435 (193060-0)	12V Ni-MH 2.8 Ah 1235 (193059-5)	9.6V Ni-MH 2.8 Ah 9135 (193058-7)	Standard Charger DC1414 (193865-8) 70 min
--	--	---	---

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Portable Power Pack

PDC1500

Powered by 36V-40Vmax built-in battery
1,500 Wh-class high capacity

Charger: DC4001
Charging time: 450 min



PDC1500A01 RM 24,240
included
- Power supply cord (Part No. 667235-2)
- DC4001 Battery Charger Set (Part No. 191L01-2)



PDC1200

Powered by 36V-40Vmax built-in battery
1,200 Wh high capacity

Charger: DC4001
Charging time: 360 min



PDC1200A01 RM 14,300
included
- 18Vx2 Adapter (Part No. 191J51-5)
- DC4001 Battery Charger Set (Part No. 191L01-2)
- Harness Assembly (127668-8)



PDC01

Powered by up to four 18V LXT batteries
432 Wh high capacity
(with 4 pcs of BL1860B)

① **PDC01** (Part No. 191A62-6)
RM 5,014.40
included
- 18V Adapter (Part No. 191J50-7)
- 18Vx2 Adapter (Part No. 191J51-5)
- Harness Assembly

② **PDC01** (Part No. 191A67-6)
RM 4,367.30
included
- 18Vx2 Adapter (Part No. 191J51-5)
- Harness Assembly



Battery Powered Models



Adapter set

Part No. 191N62-4
RM 1,079



Adapter set

Part No. 191J51-5
RM 1,119.50



Adapter set

Part No. 191J50-7
RM 761.90



Features and benefits (PDC1500/ PDC1200)



Height-adjustable waist belt

The position of the waist belt can be adjusted for personal fit and comfort.



Quickly removable harness

can be attached/ removed from the main unit with a single action.



Reflectors

keep operator visible from a distance even in the dark.

	PDC1500	PDC1200	PDC01
Capacity	43.55 Ah	33.5 Ah	24 / 12 Ah
Energy capacity	1,567.8 Wh	1,206 Wh	432 Wh (BL1860Bx4)
Number of cells	130	100	-
Charging time (hours)	7.5	6	-
Power supply cord	Battery side 1.2 m (3.9 ft) Adapter side 0.6 m (2.0 ft)	Battery Side 1.1 m (3.6 ft) Adapter Side 0.6 m (2.0 ft)	1.7 m (5.6 ft)
Dimensions (L x W x H) without Harness:	369 x 312 x 131 mm (14-1/2 x 12-1/4 x 5-1/8")	369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2")	400 x 195 x 132 mm (15-3/4 x 7-5/8 x 5-3/16")
Dimensions (L x W x H) with Harness:	516 x 312 x 193 mm (20-1/4 x 12-1/4 x 7-5/8")	428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2")	400 x 270 x 149 mm (15-3/4 x 10-5/8 x 5-7/8")
Net weight	11.1 - 13.0 kg (24.5 - 28.7 lbs)	8.8 kg (19.4 lbs)	2.8 kg (6.1 lbs)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

MAKPAC Power Source Kit

	Model No.	RSP (RM)	Set Contents		Makpac Type	
			Battery	Charger		
40Vmax 18V	PSKG1 (191T63-8)	3,859	1x 2.5Ah BL4025 (40Vmax) 1x 6.0Ah BL1860B (18V)	1x Adapter ADP10 1x Fast Charger (DC40RA)		
	MKP1G001 (191J86-6)	3,840	2x 2.5Ah BL4025			
40Vmax	MKP1G002 (191K02-4)	4,330	2x 4.0Ah BL4040			Type 1
	PSKG0 (191J70-1)	2,602	1x 4.0Ah BL4040			—
	PSKG3 (191U20-2)	6,142	2x 5.0Ah BL4050F			
	PSKG3 (191U48-0)	10,557	4x 5.0Ah BL4050F			
	PSKG3 (1910A2-5)	7,371	2x 8.0Ah BL4080F			
18V	MKP1RF181 (197973-7)	1,166	1x 3.0Ah BL1830B			
	MKP1RF182 (197974-5)	1,757	2x 3.0Ah BL1830B			
	MKP1RM182 (191L71-1)	2,047	2x 4.0Ah BL1840B			
	MKP1RT181 (197801-6)	1,430	1x 5.0Ah BL1850B			
	MKP1RT182 (197803-2)	2,285	2x 5.0Ah BL1850B			
	MKP1RG182 (198119-8)	2,552	2x 6.0Ah BL1860B	1x Rapid Charger (DC18RC)	Type 1	
	MKP3PT182 (198182-1)	2,761	2x 5.0Ah BL1850B			
	MKP3PT184 (197627-6)	4,471	4x 5.0Ah BL1850B			
	MKP3PG184 (198095-6)	5,004	4x 6.0Ah BL1860B			
	12Vmax	MKP1SY122 (197654-3)	1,069	2x 1.5Ah BL1016		
MKP1SA122 (197664-0)		1,178	2x 2.0Ah BL1021B			
MKP1SM122 (197640-4)		1,450	2x 4.0Ah BL1041B	1x Speed Charger (DC10SB)		

* All recommended selling price (RSP) shown are for reference only (exclude SST).

BCC01 | BCC02 Battery Charging Case


With multiple charging ports for 40Vmax XGT Li-Ion batteries

BCC01 : 8 ports

BCC02 : 12 ports



Vertical or horizontal
case placing



Removable lid



Rotatable twin handles



BCC01 | BCC02
RM 5,595 | RM 5,595

Battery Charging Case

40Vmax



NEW

Standard Equipment:
Charger DC4002

Max Output Power	230.4 W
Total Chargeable Capacity	BCC01 2,304 Wh BCC02 1,728 Wh
Number of charging ports	BCC01 8 (Switched in units of four ports) BCC02 12 (Switched in units of four ports)
Power Supply Cord	2.0 m (6.6 ft)
Dimensions (L x W x H)	295 x 407 x 320 mm (11-5/8 x 16 x 12-5/8")
Net Weight	BCC01 6.5 - 7.5 kg (14.3 - 16.5 lbs.) BCC02 6.8 - 7.8 kg (15.0 - 17.2 lbs.)

BAC01
RM 4052.60

Power Converter

• Turns DC power into AC power is
optimal for a wide range of applications.



AC Output Voltage	230 V
Energy Capacity	1,206 Wh with PDC1200
Continuous Rating Output	1,400 W Inverter capacity 1,400 W with PDC1200 750 W with PDC01
Max Output	2,800 W
Dimensions (L x W x H)	395 x 345 x 163 mm (15-1/2 x 13-5/8 x 6-3/8")
Net Weight	7.3 - 16.2 kg (16.1 - 35.7 lbs)



Makpac Box

TYPE 1

Part No. 191K59-5 (6pcs) RM 663.70

TYPE 2

Part No. 191K60-0 (4pcs) RM 581.90

TYPE 3

Part No. 821551-8 (1pcs)* RM 149
Part No. 191K61-8 (3pcs) RM 491

TYPE 4

Part No. 191K62-6 (2pcs) RM 381.90

* While stock last



Makpac Organiser

Part No. 191X80-2
RM 328.60

Makpac Cool Box, Makpac Box & Makpac Organiser Set are stackable for storage and easy transportation with Makpac Trolley

(Optional)
Part No. TR00000002
RM 927.30

Makpac Cool Box come with shoulder belt
(Optional for Makpac Box)
Part No. 161576-3
RM 19



Interlocking System
Easy storage & transportation



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cordless Combo Kit

DLX2424JX1

RM 3,190



1 1x Rapid Charger (DC18RC)



2 1x DMP180 Inflator
1x 5.0Ah Battery (BL1850B)



3 1x DTW300 Impact Wrench
1x 5.0Ah Battery (BL1850B)



4 1x Makpac Connector Box

DLX2423JX2

RM 2,400



1 1x Rapid Charger (DC18RC)



2 1x DTD157 Impact Driver
1x 2.0Ah Battery (BL1820B)



3 1x DDF487 Driver Drill
1x 2.0Ah Battery (BL1820B)



4 1x Double Ended Twist Torsion Screw Bit
1x (+)(-) Bit



5 1x Makpac Connector Box

DLX2417JX1

RM 2,304



1 1x Rapid Charger (DC18RC)



2 1x DHP484 Hammer Driver Drill
1x 3.0Ah Battery (BL1830B)



3 1x DTD156 Impact Driver
1x 3.0Ah Battery (BL1830B)



4 1x Double Ended Twist Torsion Screw Bit
1x (+)(-) Bit



5 1x Makpac Connector Box

DLX2414JX2

RM 2,456



1 1x Rapid Charger (DC18RC)



2 1x DTD157 Impact Driver
1x 2.0Ah Battery (BL1820B)



3 1x DHP487 Hammer Driver Drill
1x 2.0Ah Battery (BL1820B)



4 1x Double Ended Twist Torsion Screw Bit
1x (+)(-) Bit



5 1x Makpac Connector Box

CLX224

RM 1,173



1 1x Standard Charger (DC10WD)



2 1x TD110D Impact Driver
1x 1.5Ah Battery (BL1016)



3 1x DF333D Driver Drill
1x 1.5Ah Battery (BL1016)



4 1x Makita Tool Bag

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cordless Hammer Driver Drill / Cordless Driver Drill

Screwing / Drilling

Sitting

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

XGT		LXT		High
Brushless Motor		Brushless Motor		
40Vmax HP001G DF001G    150 N·m		18V DHP486 DDF486    141 N·m		Brushed Motor
		18V DHP489 DDF489    110 N·m		18V DHP458 DDF458    110 N·m
40Vmax HP002G DF002G    70 N·m		18V DHP484 DDF484    65 N·m		18V DHP482 DDF482    64 N·m
		18V DHP490 DDF490    50 N·m		
		18V DHP487 DDF487    40 N·m		
				Low
				Max Fastening Torque (N·m)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing Drilling



HP001GD201 | **HP001GZ** 13 mm (1/2")
RM 3,973 RM 1,614

Cordless Hammer Driver Drill

40Vmax



VIDEO CLIP
Models and specs
may vary by country



HP001GZ

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment: Depth Gauge,
Side Grip, Belt Clip, (+)(-) Bit, Bit Holder

- GD201: 1x Fast Charger, 2x 2.5Ah Battery,
1x Makpac Connector Box Type 3
- GZ : Without Charger, Battery & Carrying Case



BL MOTOR XPT AFT

Capacity	Steel: 20 mm (13/16") Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") Wood (Hole Saw): 152 mm (6") Siding Board: 220 mm (8-5/8") Masonry: 20 mm (13/16")
Chuck Capacity	1.5 - 13 mm (1/16" - 1/2")
Impacts Per Minute (IPM) High:	0 - 39,000 Low: 0 - 9,750
No Load Speed (RPM)	High: 0 - 2,600 Low: 0 - 650
Max Fastening Torque	Hard: 140 N-m (1,240 in lbs) Soft: 68 N-m (600 in lbs)
Max Torque	150 N-m (1,300 in lbs)
Dimensions (L x W x H)	182 x 86 x 275 mm (7-1/8 x 3-3/8 x 10-7/8")
Net Weight	2.7 - 3.0 kg (6.0 - 6.6 lbs)
Work Amount (approx.)	480 holes with BL4025, Drilled 38mm SPF with 7/8" Auger Bit (High Speed)

DF001GD201 | **DF001GZ** 13 mm (1/2")
RM 3,892 RM 1,531

Cordless Driver Drill

40Vmax



VIDEO CLIP
Models and specs
may vary by country



DF001GZ

*Recommended batteries 2.0Ah, 2.5Ah,
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Side Grip, Belt Clip, (+)(-) Bit, Bit Holder

- GD201: 1x Fast Charger, 2x 2.5Ah Battery,
1x Makpac Connector Box Type 3
- GZ : Without Charger, Battery & Carrying Case



BL MOTOR XPT AFT

Capacity	Steel: 20 mm (13/16") Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") Wood (Hole Saw): 152 mm (6") Siding Board: 220 mm (8-5/8")
Chuck Capacity	1.5 - 13 mm (1/16" - 1/2")
No Load Speed (RPM)	High: 0 - 2,600 Low: 0 - 650
Max Fastening Torque	Hard: 140 N-m (1,240 in.lbs.) Soft: 68 N-m (600 in.lbs.)
Max Torque	150 N-m (1,300 in.lbs.)
Dimensions (L x W x H)	181 x 86 x 275 mm (7-1/8 x 3-3/8 x 10-7/8")
Net Weight	2.7 - 3.0 kg (5.9 - 6.6 lbs)
Work Amount (approx.)	480 holes with BL4025 Drilled 38 mm SPF with 7/8" Auger Bit (High Speed)

HP002GD201 | **HP002GA201** | **HP002GZ** 13 mm (1/2")
RM 3,387 RM 2,654 RM 1,010

Cordless Hammer Driver Drill

40Vmax

VIDEO CLIP
Models and specs
may vary by country



HP002GZ



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
(+)(-) Bit, Belt Clip

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box Type 2
- GA201: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box Type 2
- GZ : Without Charger, Battery & Carrying Case



BL MOTOR XPT AFT

Capacity	Steel: 13 mm (1/2") Wood (Auger Bit): 38 mm (1-1/2") Wood (Hole Saw): 51 mm (2") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16" - 1/2")
Impacts Per Minute (IPM) High:	0 - 33,000 Low: 0 - 9,000
No Load Speed (RPM)	High: 0 - 2,200 Low: 0 - 600
Max Fastening Torque	Hard: 64 N-m (570 in lbs) Soft: 30 N-m (270 in lbs)
Max Torque	70 N-m (620 in lbs)
Clutch Torque Setting	1.0 - 5.0 N-m (9 - 44 in lbs)
Dimensions (L x W x H)	174 x 86 x 272 mm (6-7/8 x 3-3/8 x 10-3/4")
Net Weight	2.0 - 2.6 kg (4.4 - 5.7 lbs)
Work Amount (approx.)	990 holes with BL4025, 30 mm thick melapi with Ø 15 mm Auger Bit (High Speed)

DF002GA201 | **DF002GZK** | **DF002GZ** 13 mm (1/2")
RM 2,595 RM 950 RM 950

Cordless Driver Drill

40Vmax



VIDEO CLIP
Models and specs
may vary by country



DF002GZK

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
(+)(-) Bit, Belt Clip

- GA201: 1x Standard Charger, 2x 2.0Ah Battery,
1x Makpac Connector Box Type 2
- GZK : With Carrying Case, Without Charger & Battery
- GZ : Without Charger, Battery & Carrying Case



BL MOTOR XPT AFT

Capacity	Steel: 13 mm (1/2") Wood (Auger Bit): 38 mm (1-1/2") Wood (Hole Saw): 51 mm (2")
Chuck Capacity	1.5 - 13 mm (1/16" - 1/2")
No Load Speed (RPM)	High: 0 - 2,200 Low: 0 - 600
Max Fastening Torque	Hard: 64 N-m (570 in.lbs.) Soft: 30 N-m (270 in.lbs.)
Max Torque	70 N-m (620 in.lbs.)
Clutch Torque Setting	1.0 - 5.0 N-m (9 - 44 in.lbs.)
Dimensions (L x W x H)	164 x 86 x 272 mm (6-1/2 x 3-3/8 x 10-3/4")
Net Weight	1.9 - 2.5 kg (4.2 - 5.5 lbs)
Work Amount (approx.)	990 holes with BL4025 30mm thick melapi with Ø 15mm Auger Bit (High Speed)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiseling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita

Screwing | Drilling

DHP486RTE

DHP486Z 13 mm (1/2")

RM 2,775

RM 1,398

Cordless Hammer Driver Drill

18V

VIDEO CLIP

Models and specs may vary by country

DDF486

DHP486

Standard Equipment:

Depth Gauge, Side Handle, Belt Clip, (+/-) Bit, Bit Holder

• RTE: 1x Rapid Charger, 2x 5.0Ah Battery

• Z : Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity	Steel: 13 mm (1/2") Masonry: 16 mm (5/8") Siding Board: 170 mm (6-11/16") Wood (Auger-Bit): 50 mm (2") Wood (Hole Saw): 152 mm (6")
Impacts Per Minute (IPM)	High: 0 - 31,500 Low: 0 - 8,250
No Load Speed (RPM)	High: 0 - 2,100 Low: 0 - 550
Max Fastening Torque	Hard: 130 N-m (1,150 in.lbs) Soft: 65 N-m (580 in.lbs)
Max Torque	141 N-m (1,250 in.lbs)
Dimensions (L x W x H)	178 x 81 x 265 mm (7 x 3-3/16 x 10-3/8")
Net Weight	2.3 - 2.7 kg (5.1 - 6.0 lbs)
Work Amount (approx.)	710 holes with BL1850B Wood bit Ø 21 mm (30 mm thick melapi) High Speed

DDF486RTE

DDF486Z 13 mm (1/2")

RM 2,712

RM 1,334

Cordless Driver Drill

18V

VIDEO CLIP

Models and specs may vary by country

DDF486

DHP486

Standard Equipment:

Side Handle, Belt Clip, (+/-) Bit, Bit Holder

• RTE: 1x Rapid Charger, 2x 5.0Ah Battery

• Z : Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity	Steel: 13 mm (1/2") Wood (Auger-Bit): 50 mm (2") Wood (Hole Saw): 152 mm (6") Siding Board: 170 mm (6-11/16")
No Load Speed (RPM)	High: 0 - 2,100 Low: 0 - 550
Max Fastening Torque	Hard: 130 N-m (1,150 in.lbs.) Soft: 65 N-m (580 in.lbs.)
Max Torque	141 N-m (1,250 in.lbs.)
Dimensions (L x W x H)	178 x 81 x 265 mm (7 x 3-3/16 x 10-3/8")
Net Weight	2.3 - 2.6 kg (5.1 - 5.7 lbs)
Work Amount (approx.)	710 holes with BL1850B Wood bit Ø 21 mm (30 mm thick melapi) High Speed

DHP458RFE

DHP458Z 13 mm (1/2")

RM 1,998

RM 945

Cordless Hammer Driver Drill

18V

VIDEO CLIP

Models and specs may vary by country

DDF486

DHP486

Standard Equipment:

(+/-) Bit, Side Grip, Depth Rod, Bit Holder

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery

• Z : Without Charger, Battery & Carrying Case

*Not applicable for Z model

Capacity	Steel: 13 mm (1/2") Wood: 76 mm (3") Masonry: 16 mm (5/8")
No Load Speed (RPM)	High: 0-2,000 Low: 0-400
Impacts Per Minute (IPM)	High: 0-30,000 Low: 0-6,000
Max Fastening Torque	Hard: 91 N-m (810 in.lbs) Soft: 58 N-m (520 in.lbs)
Max Torque	110 N-m (970 in.lbs)
Dimensions (L x W x H)	225 x 79 x 259 mm (8-7/8 x 3-1/8 x 10-1/4")
Net Weight	2.2 - 2.6 kg (4.9 - 5.7 lbs)
Work Amount (approx.)	500 pcs with BL1850B Wood Screw Ø 9 x 25 mm



* All recommended selling price (RSP) shown are for reference only (exclude SST).

DHP490SF1X | **DHP490WVE** | **DHP490Z** 13 mm (1/2")
 RM 890 | RM 630 | RM 414

Cordless Hammer Driver Drill

18V



NEW



- SF1X: 1x Standard Charger, 1x 3.0Ah Battery, Makita Tool Bag
- WVE : (LXT Basic) 1x Standard Charger, 2x 2.0Ah Battery, With Carrying Case
- Z : Without Charger & Battery



*Not applicable for Z model

BL MOTOR XPT

Capacity	Masonry: 13 mm (1/2") Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	13 mm (1/2")
Impacts Per Minute (IPM)	High: 0 - 28,500 Low: 0 - 7,500
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard: 50 N-m (440 in.lbs.) Soft: 27 N-m (240 in.lbs.)
Max Torque	65 N-m (580 in.lbs.)
Max Output	460 W
Dimensions (L x W x H)	172 x 81 x 237 mm (6-3/4 x 3-3/16 x 9-3/8")
Net Weight	1.4 - 1.7 kg (3.1 - 3.7 lbs)

DDF490SF1J | **DDF490WV** | **DDF490Z** 13 mm (1/2")
 RM 860 | RM 580 | RM 398

Cordless Driver Drill

18V



NEW



- SF1J: 1x Standard Charger, 1x 3.0Ah Battery, 1x Makpac Connector Box Type 1
- WV : (LXT Basic) 1x Standard Charger, 1x 2.0Ah Battery, With Carrying Case
- Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	13 mm (1/2")
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard: 50 N-m (440 in.lbs.) Soft: 27 N-m (240 in.lbs.)
Max Torque	65 N-m (580 in.lbs.)
Dimensions (L x W x H)	167 x 81 x 237 mm (6-9/16 x 3-3/16 x 9-3/8")
Net Weight	1.4 - 1.7 kg (3.1 - 3.7 lbs)

DHP489RTJ | **DHP489Z** 13 mm (1/2")
 RM 2,512 | RM 1,128

Cordless Hammer Driver Drill

18V


 Standard Equipment:
 Hook, (+)(-) Bit

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 2
- Z : Without Charger & Battery



*Not applicable for Z model


BL MOTOR XPT

Capacity	Masonry: 16 mm (5/8") Steel: 13 mm (1/2") Wood (Auger-bit): 38 mm (1-1/2") Wood (Self-feed bit): 51 mm (2") Wood (Hole saw): 51 mm (2") Siding board: 70 mm (2-3/4")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0 - 27,000 Low: 0 - 8,250
No Load Speed (RPM)	High: 0 - 1,800 Low: 0 - 550
Max Fastening Torque	Hard: 73 N-m (650 in lbs) Soft: 40 N-m (350 in lbs)
Max Torque	110 N-m (970 in lbs)
Max Output	620 W
Dimensions (L x W x H)	175 x 81 x 261 mm (6-7/8 x 3-3/16 x 10-1/4")
Net Weight	1.8 - 2.5 kg (4.0 - 5.5 lbs)
Work Amount (approx.)	185 holes with BL1850B Ship Auger-Bit Ø 7/8", high speed (2 x 38 mm thick SPF wood)

DDF489RTJ | **DDF489Z** 13 mm (1/2")
 RM 2,450 | RM 1,064

Cordless Driver Drill

18V


 Standard Equipment:
 Hook, (+)(-) Bit

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 2
- Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 13 mm (1/2") Wood (Auger-Bit): 38 mm (1-1/2") Wood (Hole Saw): 51 mm (2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High: 0 - 1,800 Low: 0 - 550
Max Fastening Torque	Hard: 73 N-m (650 in lbs) Soft: 40 N-m (350 in lbs)
Max Torque	110 N-m (970 in lbs)
Dimensions (L x W x H)	174 x 81 x 213 mm (6-7/8 x 3-3/16 x 8-3/8")
Net Weight	1.8 - 2.5 kg (4.0 - 5.5 lbs)
Work Amount (approx.)	185 holes with BL1850B, ship Auger-Bit Ø 7/8" 2 x 38 mm thick SPF wood, high speed

DHP484RME | **DHP484RFX6** | **DHP484Z** 13 mm (1/2")
 RM 2,182 | RM 1,998 | RM 945

Cordless Hammer Driver Drill

18V


 Accessories set for
 DHP484RFX6

 Standard Equipment:
 Belt Clip, (+)(-) Bit

- RME : 1x Rapid Charger, 2x 4.0Ah Battery
- RFX6: 1x Rapid Charger, 2x 3.0Ah Battery, Accessories Set, Carrying Case
- Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0 - 30,000 Low: 0 - 7,500
No Load Speed (RPM)	High: 0 - 2,000 Low: 0 - 500
Max Fastening Torque	Hard: 54 N-m (480 in lbs) Soft: 30 N-m (270 in lbs)
Max Torque	65 N-m (580 in lbs)
Dimensions (L x W x H)	182 x 79 x 261 mm (7-1/8 x 3-1/8 x 10-1/4")
Net Weight	1.6 - 1.9 kg (3.5 - 4.2 lbs)
Work Amount (approx.)	1850 pcs with BL1850B Wood Screw Ø 9 x 25 mm

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Screwing | Drilling

DDF484Z 13 mm (1/2")
RM 882

Cordless Driver Drill

18V



Standard Equipment:
Belt Clip, (+)(-) Bit

• Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model



Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High: 0 - 2,000 Low: 0 - 500
Max Fastening Torque	Hard: 54 N-m (480 in lbs) Soft: 30 N-m (270 in lbs)
Max Torque	65 N-m (580 in lbs)
Dimensions (L x W x H)	172 x 79 x 261 mm (6-3/4 x 3-1/8 x 10-1/4")
Net Weight	1.5 - 1.8 kg (3.3 - 4.0 lbs)
Work Amount (approx.)	1550 holes with BL1850B Wood bit Ø 9 mm (30 mm thick Lauan)

DHP487RFJ | DHP487RAJ | DHP487Z 13 mm (1/2")
RM 1,817 | RM 1,731 | RM 757

Cordless Hammer Driver Drill

18V



Standard Equipment:
Belt Clip, (+)(-) Bit

• RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
• RAJ: 1x Rapid Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box
• Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model



Capacity	Steel: 13 mm (1/2") Masonry: 13 mm (1/2") Wood (Self-Feed Bit): 35 mm (1-3/8") Wood (Auger Bit): 36 mm (1-7/16") Wood (Hole Saw): 51 mm (2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0 - 25,500 Low: 0 - 7,500
No Load Speed (RPM)	High: 0 - 1,700 Low: 0 - 500
Max Fastening Torque	Hard: 40 N-m (350 in lbs) Soft: 25 N-m (220 in lbs)
Max Torque	40 N-m (350 in lbs)
Dimensions (L x W x H)	164 x 81 x 248 mm (6-1/2 x 3-3/16 x 9-3/4")
Net Weight	1.4 - 1.7 kg (3.1 - 3.7 lbs)
Work Amount (approx.)	640 holes with BL1820B Wood bit Ø 9 mm (30 mm thick melapi) High Speed

DDF487Z 13 mm (1/2")
RM 695

Cordless Driver Drill

18V



Standard Equipment:
Belt Clip, (+)(-) Bit

• Z: Without Charger & Battery



Capacity	Steel: 13 mm (1/2") Wood (Hole Saw): 51 mm (2") Wood (Self-Feed Bit): 35 mm (1-3/8") Wood (Auger Bit): 36 mm (1-7/16")
No Load Speed (RPM)	High: 0 - 1,700 Low: 0 - 500
Max Fastening Torque	Hard: 40 N-m (350 in lbs) Soft: 25 N-m (220 in lbs)
Max Torque	40 N-m (350 in lbs)
Dimensions (L x W x H)	150 x 81 x 248 mm (5-7/8 x 3-3/16 x 9-3/4")
Net Weight	1.3 - 1.6 kg (2.9 - 3.5 lbs)
Work Amount (approx.)	640 holes with BL1820B Wood bit Ø 9 mm (30 mm thick melapi) High Speed

DHP482RFE | DHP482Z 13 mm (1/2")
RM 1,734 | RM 673

Cordless Hammer Driver Drill

18V



Standard Equipment:
Belt Clip, (+)(-) Bit

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model



Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2") Masonry: 13 mm (1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High: 0 - 28,500 Low: 0 - 9,000
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 600
Max Fastening Torque	Hard: 62 N-m (550 in lbs) Soft: 36 N-m (320 in lbs)
Max Torque	64 N-m (570 in lbs)
Dimensions (L x W x H)	198 x 79 x 249 mm (7-3/4 x 3-1/8 x 9-3/4")
Net Weight	1.5 - 1.8 kg (3.4 - 4.1 lbs)
Work Amount (approx.)	781 holes with BL1850B Brad Point Wood Bit Ø 8 mm (1" Depth mixed wood)

DDF482RFE | DDF482Z 13 mm (1/2")
RM 1,693 | RM 631

Cordless Driver Drill

18V



Standard Equipment:
Belt Clip, (+)(-) Bit

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case



*Not applicable for Z model



Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 600
Max Fastening Torque	Hard: 62 N-m (550 in lbs) Soft: 36 N-m (320 in lbs)
Max Torque	64 N-m (570 in lbs)
Dimensions (L x W x H)	185 x 79 x 249 mm (7-1/4 x 3-1/8 x 9-3/4")
Net Weight	1.5 - 1.8 kg (3.2 - 4.0 lbs)
Work Amount (approx.)	781 holes with BL1850B Brad point wood bit Ø 8 mm (1" depth mixed wood)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

HP332DZ 10 mm (3/8")

RM 682

Cordless Hammer Driver Drill**12Vmax****Standard Equipment:**

Phillips Bit, Belt Clip

• DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 10 mm (3/8") Wood: 28 mm (1-1/8")
Chuck Capacity	Masonry: 8 mm (5/16") 0.8 - 10 mm (1/32 - 3/8")
Impacts Per Minute (IPM)	High: 0 - 22,500 Low: 0 - 6,750
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 450
Max Fastening Torque	Hard: 35 N-m (310 in lbs) Soft: 21 N-m (190 in lbs)
Max Torque	38 N-m (340 in lbs)
Dimensions (L x W x H)	168 x 66 x 217 mm (6-5/8 x 2-5/8 x 8-1/2")
Net Weight	1.1 - 1.3 kg (2.4 - 2.8 lbs)
Work Amount (approx.)	460 holes with BL1021B Drilling Ø 9 mm Auger Bit Melapi 30 mm Thickness

DF332DZ 10 mm (3/8")

RM 631

Cordless Driver Drill**12Vmax****Standard Equipment:**

Phillips Bit, Belt Clip

• DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 10 mm (3/8") Wood: 28 mm (1-1/8")
Chuck Capacity	0.8 - 10 mm (1/32 - 3/8")
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 450
Max Fastening Torque	Hard: 35 N-m (310 in lbs) Soft: 21 N-m (190 in lbs)
Max Torque	38 N-m (340 in lbs)
Dimensions (L x W x H)	154 x 66 x 217 mm (6-1/16 x 2-5/8 x 8-1/2")
Net Weight	1.0 - 1.2kg (2.3 - 2.6 lbs)
Work Amount (approx.)	460 holes with BL1021B Drilling Ø 9 mm Auger Bit Melapi 30 mm Thickness

HP333DWAE

RM 996

HP333DWYE

RM 926

HP333DZK

RM 368

HP333DZ 10 mm (3/8")

RM 368

Cordless Hammer Driver Drill**12Vmax****HP333DZK
WHILE STOCK LAST****Standard Equipment:**

Phillips Bit, Belt Clip

- DWAE : 1x Standard Charger, 2x 2.0Ah Battery
- DWYE : 1x Standard Charger, 2x 1.5Ah Battery
- DZK : With Carrying Case, Without Charger & Battery
- DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 10 mm (3/8") Wood: 21 mm (13/16") Masonry: 8 mm (5/16")
Chuck Capacity	0.8 - 10 mm (1/32 - 3/8")
Impacts Per Minute (IPM)	High: 0 - 25,500 Low: 0 - 6,750
No Load Speed (RPM)	High: 0 - 1,700 Low: 0 - 450
Max Fastening Torque	Hard: 30 N-m (270 in lbs) Soft: 14 N-m (130 in lbs)
Max Torque	34 N-m (300 in lbs)
Dimensions (L x W x H)	193 x 66 x 212 mm (7-5/8 x 2-5/8 x 8-3/8")
Net Weight	1.1 - 1.3 kg (2.4 - 2.9 lbs)
Work Amount (approx.)	350 holes with BL1021B Drilling Ø 9 mm Auger Bit Melapi 30 mm Thickness

DF333DWAE

RM 935

DF333DWYE

RM 865

DF333DZK

RM 306

DF333DZ 10 mm (3/8")

RM 306

Cordless Driver Drill**12Vmax****Standard Equipment:**

Phillips Bit, Belt Clip

- DWAE : 1x Standard Charger, 2x 2.0Ah Battery
- DWYE : 1x Standard Charger, 2x 1.5Ah Battery
- DZK : With Carrying Case, Without Charger & Battery
- DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR XPT

Capacity	Steel: 10 mm (3/8") Wood: 21 mm (13/16")
Chuck Capacity	0.8 - 10 mm (1/32 - 3/8")
No Load Speed (RPM)	High: 0 - 1,700 Low: 0 - 450
Max Fastening Torque	Hard: 30 N-m (270 in lbs) Soft: 14 N-m (130 in lbs)
Max Torque	34 N-m (300 in lbs)
Dimensions (L x W x H)	179 x 66 x 212 mm (7 x 2-5/8 x 8-3/8")
Net Weight	1.1 - 1.2 kg (2.4 - 2.7 lbs)
Work Amount (approx.)	350 holes with BL1021B Drilling Ø 9 mm Auger Bit Melapi 30 mm Thickness

DF033DZ 10 mm (3/8")

RM 253

Cordless Driver Drill**12Vmax****Standard Equipment:**

Phillips Bit, Belt Clip

• DZ: Without Charger & Battery



Capacity	Steel: 10 mm (3/8") Wood: 21 mm (13/16")
Chuck Capacity	6.35 mm (1/4")
No Load Speed (RPM)	High: 0 - 1,700 Low: 0 - 450
Max Fastening Torque	Hard: 30 N-m (270 in lbs) Soft: 14 N-m (130 in lbs)
Max Torque	34 N-m (300 in lbs)
Dimensions (L x W x H)	149 x 66 x 212 mm (5-7/8 x 2-5/8 x 8-3/8")
Net Weight	0.9 - 1.1 kg (2.1 - 2.4 lbs)
Work Amount (approx.)	160 holes with BL1021B Wood Drilling Ø 3 x 1.6 mm

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita

Screwing | Drilling

Screwing / Drilling

Stringing

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Speciality Tools

Accessory



HP330DWE 10 mm (3/8")
RM 809

Cordless Hammer Driver Drill

10.8V



- Standard Equipment:
Phillips Bit, Holster
- DWE: 1x Standard Charger, 2x 1.3Ah Battery
- 

Capacity	Steel: 10 mm (3/8") Wood: 21 mm (13/16") Masonry: 8 mm (5/16")
Impacts Per Minute (IPM)	High: 0 - 22,500 Low: 0 - 6,000
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 400
Max Fastening Torque	Hard: 24 N·m Soft: 12 N·m
Max Torque	28 N·m (250 in lbs)
Dimensions (L x W x H)	201 x 53 x 183 mm (7-7/8 x 2-1/16 x 7-1/4")
Net Weight	1.1 kg (2.3 lbs)
Work Amount (approx.)	220 holes with BL1013 Auger Bit Drilling Ø 9 mm Melapi 30 mm Thickness

DF330DWE 10 mm (3/8")
RM 631

Cordless Driver Drill

10.8V




- Standard Equipment:
Phillips Bit, Holster
- DWE: 1x Standard Charger, 2x 1.3Ah Battery
- 

Capacity	Steel: 10 mm (3/8") Wood: 21 mm (13/16")
No Load Speed (RPM)	High: 0 - 1,300 Low: 0 - 350
Max Fastening Torque	Hard: 24 N·m Soft: 14 N·m
Max Torque	28 N·m (250 in lbs)
Dimensions (L x W x H)	189 x 53 x 183 mm (7-7/16 x 2-1/16 x 7-1/4")
Net Weight	1 kg (2.2 lbs)
Work Amount (approx.)	220 holes with BL1013 Auger Bit Drilling Ø 9 mm Melapi 30 mm Thickness

DF012DSE
RM 873

Cordless Driver Drill

7.2V



- Standard Equipment:
Phillips Bit 2pcs
- DSE: 1x Standard Charger, 2x 1.5Ah Battery
- 

Capacity	Steel: 5 mm (3/16") Wood: 6 mm (1/4")
No Load Speed (RPM)	High: 650 Low: 200
Max Fastening Torque	Hard: 5.6 N·m (50 in lbs) Soft: 3.6 N·m (32 in lbs)
Max Torque	11 N·m (97 in lbs)
Dimensions (L x W x H)	Pistol Style: 218 x 44 x 142 mm (8-5/8 x 1-3/4 x 5-5/8") Straight Style: 273 x 44 mm (10-3/4 x 1-3/4")
Net Weight	0.53 kg (1.2 lbs)
Work Amount (approx.)	350 pcs with BL7010 Wood screw Ø 3.8 x 25 mm Melapi Drove Wood



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cordless Impact Driver

XGT**LXT**

High

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Trakitta
int

40Vmax

230 N·m


TD004G**XGT BL XPT**4 stage
power selection1 Assist
mode (1 Teks)

40Vmax

210 N·m

TD003G**XGT BL XPT**4 stage
power selection1 Assist
mode (1 Teks)**Assist mode**

helps to eliminate "screw cam-out" and "cross threading" by driving at low speed until the start of tightening.

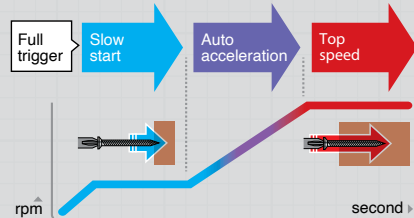**Teks mode**

"Teks" mode is a special mode optimum for fast tightening of self drilling screws without damaging the screw and the workpiece.

18V

180 N·m

DTD173**LXT BL XPT**4 stage
power selection4 Assist
mode (Wood/ Bolt/ 2 Teks)

18V

155 N·m

DTD156**LXT**

Brushed Motor

18V

165 N·m

DTD152**LXT XPT**

Brushed Motor

18V

140 N·m

DTD157**LXT BL XPT**2 stage
power selectionAssist
mode

Low

Max Fastening Torque (N·m)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Speciality Tools

Accessory

Makita

int

TD004G


Cordless Impact Driver

- Delivers excellent fastening performance in heavy-duty tasks, such as tightening hex head or hexalobular (star-shaped) hole head coarse thread screws, which are less prone to cam-out.
- Capable of smoothly fastening screws on hard materials, such as LVL (Laminated Veneer Lumber).



4-stage impact power selection + T-mode (for thin metal sheets only)

- The impact power can be adjusted to four stages to match the type of screw and material.
- For tasks requiring attention to cam-out, such as with Phillips head screws, the impact force can be adjusted accordingly.
- Equipped with the T-Mode to minimize screw stripping, which is likely to occur when a self-drilling screw is tightened into a thin metal sheet workpiece under light load.

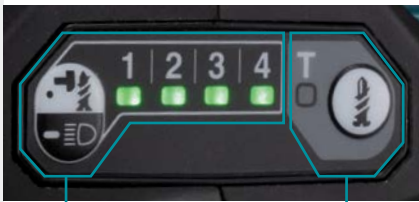

4-stage 4 (Max) 2 (Medium) T-mode
3 (Hard) 1 (Soft)

One-touch bit installation
Reduced resistance allows for easier bit installation.

Max Fastening Torque
230 N·m

Overall length
136mm



Reversing switch

Variable speed control by trigger
Allows for speed adjustments based on the material or application.

Soft grip

Hook

TD004GZ

Cordless Impact Driver

40Vmax



* Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

NEW



Standard Equipment:
Hook

* GZ: Without Charger & Battery



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M20 (3/16 - 13/16") High Strength Bolt: M5 - M14 (3/16 - 9/16") Coarse thread (in length): 22 - 150 mm (7/8 - 5-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Max: 0 - 3,900 Hard: 0 - 3,000 Med.: 0 - 2,100 Soft: 0 - 1,200
Impacts Per Minute (IPM)	Max: 0 - 3,900 Hard: 0 - 3,600 Med.: 0 - 3,100 Soft: 0 - 1,900
Max Fastening Torque	230 N·m (2,040 in.lbs.)
Dimensions (L x W x H)	136 x 86 x 248 mm (5-3/8 x 3-3/8 x 9-3/4")
Net Weight	1.8 - 3.1 kg (4.0 - 6.8 lbs.)
Work Amount (approx.)	113 pcs with BL4025 Hex head coarse thread screws 90 mm x 5.0 mm diameter into LVL (Laminated Veneer Lumber)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

TD003GA201 | TD003GZ

RM 2,626 | RM 981


Cordless Impact Driver**40Vmax**

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

**Standard Equipment:**

Belt Clip

- GA201: 1x Standard Charger, 2x 2.0Ah Battery, 1x Makpac Connector Box Type 2
- GZ : Without Charger, Battery & Carrying Case



*Not applicable
for Z model



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M16 (3/16 - 5/8") High Strength Bolt: M5 - M14 (3/16 - 9/16") Coarse Thread (in length): 22 - 125 mm (7/8 - 4-7/8")
Hex Shank	Steel: 22 mm (7/8") Wood (Auger Bit): 24 mm (15/16") 6.35 mm (1/4")
No Load Speed (RPM)	Max / Hard / Med. / Soft / T mode: 0 - 3,700 / 0 - 3,200 / 0 - 2,100 / 0 - 1,100 / 0 - 2,400
Impacts Per Minute (IPM)	Max / Hard / Med. / Soft / T mode: 0 - 4,100 / 0 - 3,600 / 0 - 2,600 / 0 - 1,400 / N/A
Max Fastening Torque	210 N-m (1,860 in lbs)
Dimensions (L x W x H)	121 x 86 x 245 mm (4-3/4 x 3-3/8 x 9-5/8")
Net Weight	1.7 - 2.9 kg (3.7 - 6.4 lbs)
Work Amount (approx.)	280 pcs with BL4025 Coarse thread screw 120 mm

DTD173RTJ | DTD173Z

RM 2,773 | RM 1,396

Cordless Impact Driver**18V****Standard Equipment:**

Belt Clip

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 2
- Z : Without Charger, Battery & Carrying Case



*Not applicable
for Z model



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M16 (3/16 - 5/8") High Strength Bolt: M5 - M14 (3/16 - 9/16") Coarse Thread (in length): 22 - 125 mm (7/8 - 4-7/8") Wood (Auger Bit): 24 mm (15/16")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Max: 0 - 3,600 Hard: 0 - 3,200 Med.: 0 - 2,100 Soft: 0 - 1,100
Impacts Per Minute (IPM)	Max: 0 - 3,800 Hard: 0 - 3,600 Med.: 0 - 2,600 Soft: 0 - 1,100
Max Fastening Torque	180 N-m (1,590 in.lbs.)
Dimensions (L x W x H)	111 x 81 x 234 mm (4-3/8 x 3-3/16 x 9-1/4")
Net Weight (with battery)	1.5 kg (3.3 lbs)
Work Amount (approx.)	970 pcs with BL1860B Coarse thread screw 65 mm at max impact mode

DTD152RFE | DTD152Z

RM 1,765 | RM 704

Cordless Impact Driver**18V****Standard Equipment:**

Belt Clip

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z : Without Charger, Battery & Carrying Case



*Not applicable
for Z model



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M16 (3/16 - 5/8") High Tensile Bolt: M5 - M12 (3/16 - 1/2") Coarse Thread (in length): 22 - 125 mm (7/8 - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,900
Impacts Per Minute (IPM)	0 - 3,500
Max Fastening Torque	165N-m (1,460 in lbs)
Dimensions (L x W x H)	137 x 79 x 238 mm (5-3/8 x 3-1/8 x 9-3/8")
Net Weight	1.3 - 1.6 kg (2.8 - 3.5 lbs)
Work Amount (approx.)	603 pcs with BL1850B Hex screw 3/4" Hording sheet 0.23 mm RHS 1.6 mm

DTD156RF | DTD156Z

RM 1,065 | RM 371

Cordless Impact Driver**18V****Standard Equipment:**

Belt Clip

- RF: 1x Rapid Charger, 1x 3.0Ah Battery
- Z : Without Charger, Battery & Carrying Case



*Not applicable
for Z model



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M12 (3/16 - 1/2") Coarse Thread (in length): 22 - 125 mm (7/8 - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	155 N-m (1,370 in lbs)
Dimensions (L x W x H)	143 x 79 x 241 mm (5-5/8 x 3-1/8 x 9-1/2")
Net Weight	1.3 - 1.6 kg (2.9 - 3.6 lbs)
Work Amount (approx.)	340 pcs with BL1830B Coarse thread screw 90 mm into melapi

DTD157Z

RM 715

Cordless Impact Driver**18V****Standard Equipment:**

Belt Clip, Double Ended Twist Torsion Screw Bit

- Z: Without Charger & Battery



*Not applicable
for Z model



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M5 - M14 (3/16 - 9/16") High Strength Bolt: M5 - M12 (3/16 - 1/2") Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Hard: 0 - 3,000 Soft: 0 - 1,300
Impacts Per Minute (IPM)	Hard: 0 - 4,100 Soft: 0 - 2,000
Max Fastening Torque	140 N-m (1,240 in lbs)
Dimensions (L x W x H)	133 x 81 x 232 mm (5-1/4 x 3-3/16 x 9-1/8")
Net Weight	1.2 - 1.5 kg (2.6 - 3.3 lbs)
Work Amount (approx.)	300 pcs with BL1820B Coarse thread screw 90 mm into melapi in hard impact mode

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Screwing | Drilling

TD111DZK | TD111DZ

RM 628 NEW RM 628

Cordless Impact Driver

12Vmax



Standard Equipment:
Phillips Bit, Belt Clip

- DZK : With Carrying Case, Without Charger & Battery
- DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model



Capacity	Machine Screw: M4 - M8 mm (5/32" - 5/16") Standard Bolt: M5 - M14 (3/16" - 9/16") High Tensile Bolt: M5 - M12 (3/16" - 1/2") Coarse thread (in length): 22 - 90 mm (7/8" - 3-1/2")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Hard: 0 - 3,000 Soft: 0 - 1,300
Impacts Per Minute (IPM)	Hard: 0 - 3,900 Soft: 0 - 1,600
Max Fastening Torque	135 N-m (1,200 in lbs)
Dimensions (L x W x H)	135 x 66 x 210 mm (5-5/16 x 2-5/8 x 8-1/4")
Net Weight	0.97 - 1.1 kg (2.1 - 2.5 lbs)
Work Amount (approx.)	340 pcs with BL1021B Coarse Thread Wood Screw 45 mm (Melapi)

TD110DWAE | TD110DWYE | TD110DZK | TD110DZ

RM 934 RM 864 RM 304 RM 304

Cordless Impact Driver

12Vmax



TD110DZK
WHILE STOCK LAST

Standard Equipment:
Phillips Bit, Belt Clip

- DWAE : 1x Standard Charger, 2x 2.0Ah Battery
- DWYE : 1x Standard Charger, 2x 1.5Ah Battery
- DZK : With Carrying Case, Without Charger & Battery
- DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16") Standard Bolt: M5 - M12 (3/16 - 1/2") High Tensile Bolt: M5 - M10 (3/16 - 3/8") Coarse thread (in length): 22 - 90 mm (7/8" - 3-1/2")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,600
Impacts Per Minute (IPM)	0 - 3,500
Max Fastening Torque	110 N-m (970 in lbs)
Dimensions (L x W x H)	153 x 66 x 204 mm (6 x 2-5/8 x 8-1/8")
Net Weight	1.0 - 1.2 kg (2.3 - 2.6 lbs)
Work Amount (approx.)	250 pcs with BL1021B Coarse Thread Wood Screw 45mm (Melapi)

TD090DWE

RM 695

Cordless Impact Driver

10.8V



Standard Equipment:
Holster

- DWE : 1x Standard Charger, 2x 1.3Ah Battery




Capacity	Machine Screw: M4 - M8 mm (5/32 - 5/16") Standard Bolt: M5 - M12 (3/16 - 1/2") High Tensile Bolt: M5 - M10 (3/16 - 3/8") Coarse thread (in length): 22 - 90 mm (7/8 - 3-1/2")
No Load Speed (RPM)	0 - 2,400
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	90 N-m (800 in lbs)
Dimensions (L x W x H)	155 x 54 x 178 mm (6-1/8 x 2-1/8 x 7")
Net Weight	0.92 kg (2.0 lbs)
Work Amount (approx.)	550 pcs with BL1013 Bolts M8 x 16 mm

TD022DSE

RM 904

Cordless Impact Driver

7.2V



Standard Equipment:
Holster, Phillips Bit

- DSE : 1x Standard Charger, 2x 1.5Ah Battery



Capacity	Machine Screw: M3 - M8 (1/8 - 5/16") Standard Bolt: M3 - M8 (1/8 - 5/16") High Tensile Bolt: M3 - M6 (1/8 - 1/4") Coarse thread (in length): 22 - 45mm (7/8 - 1-3/4")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,450
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	25 N-m (220 in lbs)
Dimensions (L x W x H)	Straight Style: 282x42x52mm (11-1/8 x 1-5/8 x 2-1/16") Pistol Style: 227 x 42 x 142 mm (8-15/16 x 1-5/8 x 5-5/8")
Net Weight	0.55 - 0.56 kg (1.2 lbs)
Work Amount (approx.)	320 pcs with BL7010 Wood Screw Ø 3.1 x 25 mm (Melapi Drove Wood)

TD0101F 6.35 mm (1/4") Hex Shank

RM 464

411 mm

Impact Driver

- Enables to drive screws even without pre-drilling pilot holes.



Standard Equipment:
Phillips Bit



Continuous Rating Input Capacity	230 W
Machine Screw	: M4 - M8 (5/32 - 5/16")
Standard Bolt	: M5 - M14 (3/16 - 9/16")
High Tensile Bolt	: M5 - M10 (3/16 - 3/8")
Coarse thread (in length)	: 22 - 90 mm (7/8 - 3-1/2")
Impacts Per Minute (IPM)	0 - 3,200
No Load Speed (RPM)	0 - 3,600
Max Fastening Torque	100 N-m (74 ft lbs)
Dimensions (L x W x H)	184 x 67 x 192 mm (7-1/4 x 2-5/8 x 7-9/16")
Net Weight	0.99 kg (2.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)




* All recommended selling price (RSP) shown are for reference only (exclude SST).

TL064DZ

RM 935

Cordless Angle Impact Driver

12Vmax



Standard Equipment:

Phillips Bit, Belt Clip

• DZ : Without Charger, Battery & Carrying Case



Capacity	Machine Screw: M4 - M8 (5/32 - 5/16") Standard Bolt: M4 - M12 (5/32 - 1/2") High Tensile Bolt: M4 - M8 (5/32 - 5/16") Coarse thread (in length): 22 - 75 mm (7/8" - 2-31/32")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N·m (530 in lbs)
Dimensions (L x W x H)	361 x 66 x 86 mm (14-1/4 x 2-5/8 x 3-3/8")
Net Weight	1.2 - 1.6 kg (2.7 - 3.6 lbs)
Work Amount (approx.)	933 pcs with BL1021B Machine Screw M8 x 16 mm

DS5000 16 mm (5/8")

RM 1,556

411

Drill

• Powerful 750W motor for improved mixing and drilling performance.



Standard Equipment:

Chuck Key, Top Grip



Continuous Rating Input	750 W
Capacity	Steel: 16 mm (5/8") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	600
Dimensions (L x W x H)	348 x 83 x 401 mm (13-3/4 x 3-1/4 x 15-3/4")
Net Weight	3.0 kg (6.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

6305 13 mm (1/2")

RM 1,325

303

Drill

• Heavy duty motor.



Standard Equipment: Chuck Key, Depth Gauge, Side Grip



Continuous Rating Input	850 W
Capacity	Steel: 13 mm (1/2") Wood: 30 mm (1-3/16")
No Load Speed (RPM)	1,450
Dimensions (L x W x H)	346 x 84 x 152 mm (13-5/8 x 3-5/16 x 6")
Net Weight	2.8 kg (6.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

DS4012 13 mm (1/2")

RM 1,198

411

Drill

• All-ball bearing construction for durability and longer tool life.



Standard Equipment:

Chuck Key, Top Grip



Continuous Rating Input	750 W
Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	0 - 600
Dimensions (L x W x H)	340 x 83 x 390 mm (13-3/8 x 3-1/4 x 15-3/8")
Net Weight	2.8 kg (6.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

DP4021 13 mm (1/2")

RM 410

475

Drill

• Increased durability against wobbling spindle.



Continuous Rating Input	630 W
Capacity	Steel: 13 mm (1/2") Wood: 30 mm (1-3/16")
No Load Speed (RPM)	0 - 3,000
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Chuck Type	Keyless (2-sleeve)
Dimensions (L x W x H)	271 x 66 x 209 mm (10-5/8 x 2-5/8 x 8-1/4")
Net Weight	1.6 kg (3.5 lbs)
Power Supply Cord	2.0 m (6.6 ft)

6413 10 mm (3/8")

RM 284

64

Drill

• General purpose drill featuring compact and lightweight design.



Continuous Rating Input	450 W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	0 - 3,400
Dimensions (L x W x H)	234 x 64 x 183 mm (9-1/4 x 2-1/2 x 7-1/4")
Net Weight	1.3 kg (2.9 lbs)
Power Supply Cord	2.0 m (6.6 ft)



DA001GZ 13 mm (1/2")

RM 3,315

Cordless Angle Drill

40Vmax



Standard Equipment:

Chuck Key, Chuck Key Holder, Handle Set (191R81-4), Hex Wrench, Hook

• GZ: Without Charger & Battery



Capacity	Steel: 13 mm (1/2") Wood (Self-Feed Bit) Hi: 65 mm (2-9/16") Wood (Self-Feed Bit) Lo: 118 mm (4-5/8") Wood (Hole Saw) Hi: 105 mm (4-1/8") Wood (Hole Saw) Lo: 159 mm (6-1/4") Wood (Auger-Bit): 50 mm (2")
Chuck Capacity	2 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 400
Max Fastening Torque	High: 55 N·m (487in lbs) Low: 136 N·m (1,210 in lbs)
Dimensions (L x W x H)	539 x 128 x 199 mm (21-1/4 x 5 x 7-7/8")
Net Weight	5.3 - 6.2 kg (11.7 - 13.7 lbs)

Screwing | Drilling

DDA460ZK 13 mm (1/2")

RM 3,518

Cordless Angle Drill

18V x2

Standard Equipment:
Chuck Key, Hex Wrench, Side Grip

• ZK: With Carrying Case,
Without Charger & Battery

VIDEO CLIP
Models and specs
may vary by country

QR CODE
DDA460

WHILE STOCK LAST

BL MOTOR XPT ADT



Capacity	Steel: 13 mm (1/2") Wood (Self-Feed Bit) Hi: 65 mm (2-9/16") Wood (Self-Feed Bit) Lo: 118 mm (4-5/8") Wood (Hole Saw) Hi: 105 mm (4-1/8") Wood (Hole Saw) Lo: 159 mm (6-1/4") Wood (Auger-Bit): 50 mm (2") High: 0 - 1,400 I Low: 0 - 350
No Load Speed (RPM)	
Max Fastening Torque	High: 48N·m (430 in lbs) Low: 136N·m (1,210 in lbs)
Max Output	1,350 W
Dimensions (L x W x H)	538 x 128 x 223 mm (21-1/4 x 5 x 8-3/4")
Net Weight	5.7 - 6.4 kg (12.6 - 14.0 lbs)
Work Amount (approx.)	80 holes with BL1850B x2 2 Layered SPF

DDA450Z

RM 1,681

Cordless Angle Drill

18V

Standard Equipment:
Chuck Key, Chuck Key Holder,
Side Grip, Hook, (+) Screw

• Z: Without Charger & Battery

QR CODE

BL MOTOR XPT



Capacity	Steel: 13 mm (1/2") Wood (Auger-Bit): 38 mm (1-1/2") Wood (Hole Saw) Hi: 101 mm (4") Wood (Hole Saw) Lo: 127 mm (5") Wood (Self-Feed Bit) Hi: 50 mm (2") Wood (Self-Feed Bit) Lo: 65 mm (2-9/16") 2 - 13 mm (1/16 - 1/2")
Chuck Capacity	
No Load Speed (RPM)	High: 0 - 1,400 I Low: 0 - 450
Max Fastening Torque	High: 26 N·m (230 in lbs) Low: 70 N·m (620 in lbs)
Dimensions (L x W x H)	434 x 82 x 179 mm (17-1/8 x 3-1/4 x 7")
Net Weight	3.2 - 3.5 kg (7.1 - 7.7 lbs)
Work Amount (approx.)	125 holes with BL1860B 2 layer of SPF 2 x 10 plate

DDA351Z 10 mm (3/8")

RM 1,040

Cordless Angle Drill

18V

Standard Equipment:
Side Grip

• Z: Without Charger & Battery

QR CODE

BL MOTOR XPT



Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1") 0-1,800
No Load Speed (RPM)	
Dimensions (L x W x H)	326 x 79 x 115 mm (12-7/8 x 3-1/8 x 4-1/2")
Net weight	1.6 - 1.9 kg (4.2 - 3.5 lbs)
Work Amount (approx.)	1000 pcs with BL1850B Wood Screw Ø 5.1 x 38 mm

DA332DZ 10 mm (3/8")

RM 620

Cordless Angle Drill

12Vmax

Standard Equipment:
Chuck Key, Chuck Key Holder, Phillips Bit, Belt Clip

• DZ: Without Charger & Battery

QR CODE



Capacity	Steel: 10 mm (3/8") Wood: 12 mm (1/2") 0 - 1,100
No Load Speed (RPM)	
Head Height	63 mm (2-1/2")
Center Height	23.5 mm (15/16")
Dimensions (L x W x H)	BL1021B: 313 x 68 x 86mm (12-3/8 x 2-11/16 x 3-3/8") BL1041B: 332 x 68 x 86 mm (13-1/8 x 2-11/16 x 3-3/8")
Net Weight	1.2 - 1.3 kg (2.6 - 2.9 lbs)
Work Amount (approx.)	600 pcs with BL1021B Wood Screw Ø 4.1 x 38 mm

DA3010F 10 mm (3/8")

RM 1,156

Angle Drill

• Powerful 450W motor with less weight.

Continuous Rating Input 450 W

Capacity Steel: 10 mm (3/8")
Wood: 25 mm (1")
0 - 2,400

No Load Speed (RPM)

Overall Length 270 mm (10-5/8")

Net Weight 1.6 kg (3.5 lbs)

Power Supply Cord 2.5 m (8.2 ft)

Standard Equipment: Chuck Key,
Side grip 36 complete

QR CODE






* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cordless Impact Wrench

 Standard Bolt Size  High strength Bolt Size

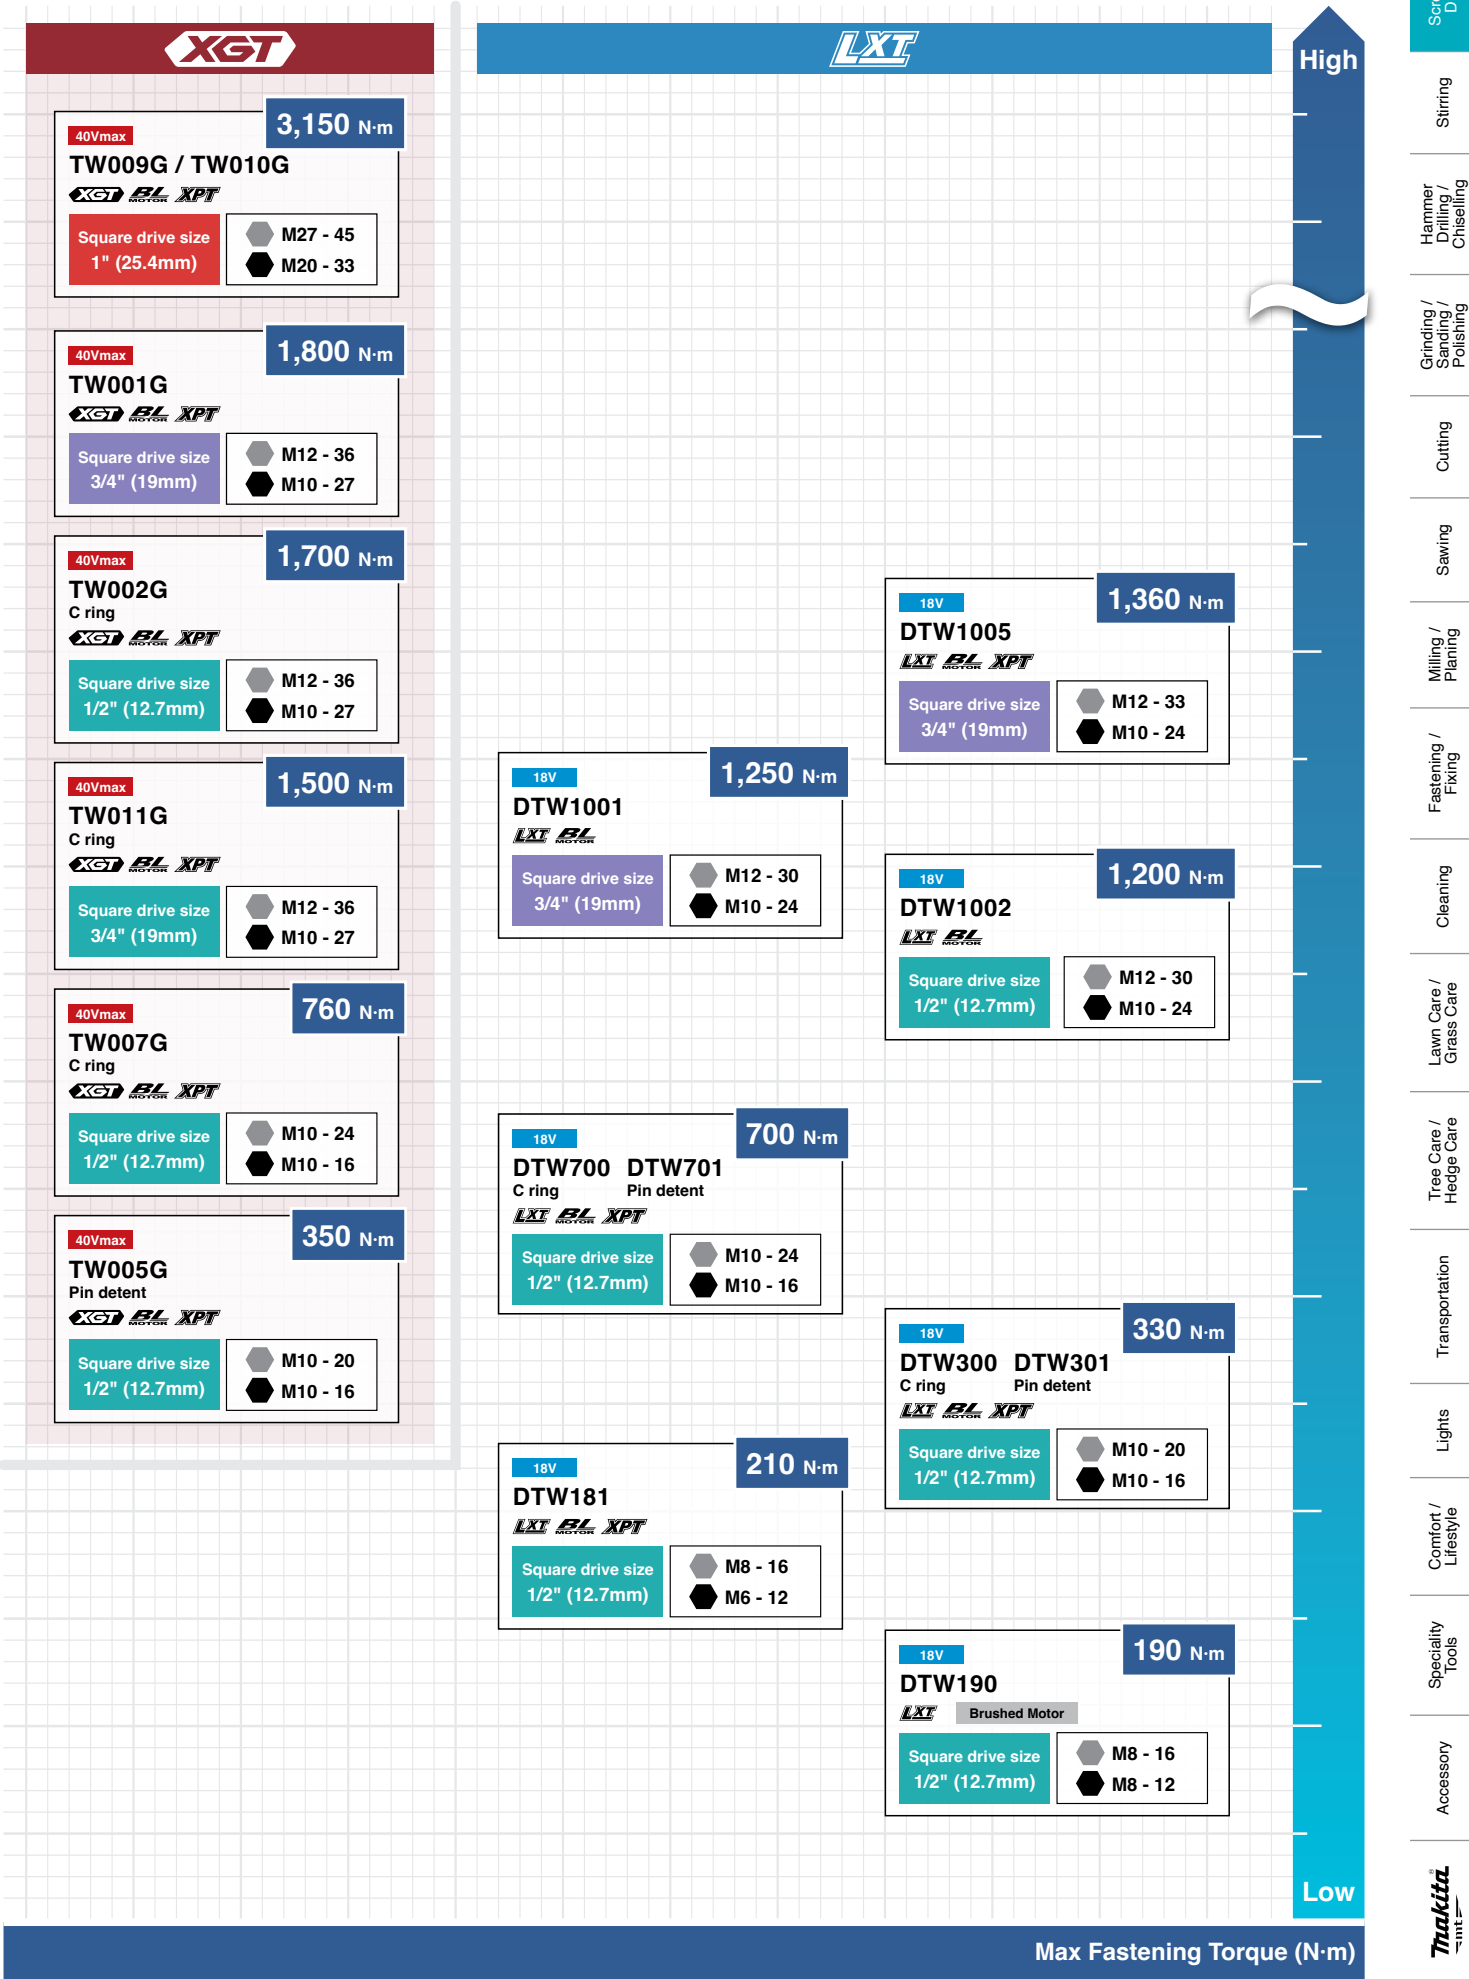

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle


Specialty Tools

Accessory

* All recommended selling price (RSP) shown are for reference only (exclude SST).

TW009G | TW010G

Cordless Impact Wrench

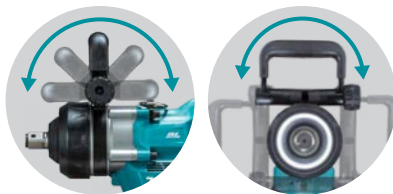

Toolless installation of Side handle can be installed 360° without a tool, and the angle of the holding section can be adjusted back and forth, making it suitable for a variety of operations.



Ring illumination LED
Reduces the shadow of the socket on a workpiece, providing a better view of the workpiece.

Electronic 4 stage impact power selection

Both in forward and reverse rotation modes, max (4)/ hard (3)/ medium (2)/ soft (1) impact power can be selected to suit the material of workpiece or bolt type simply by pushing the button.

Pushing the button



Mode	Max mode (4)	Hard mode (3)	Medium mode (2)	Soft mode (1)
Fastening torque (N·m)*1	2,850	1,600	1,000	600
No load speed (min-1)	0-1,200	0-850	0-700	0-600
Impacts per minutes (min-1)	0-1,750	0-1,500	0-1,300	0-1,200

*1 3 seconds after seating, when tightening

Switch panel




Ring illumination LED switch
With preglow/ afterglow functions and light mode.

Full speed mode lamp

Full speed mode button (Variable speed/ full speed)

- Full speed is reached with less trigger pull, reducing fatigue in continuous operation.
- Variable speed mode or Full speed mode can be selected depending on applications.

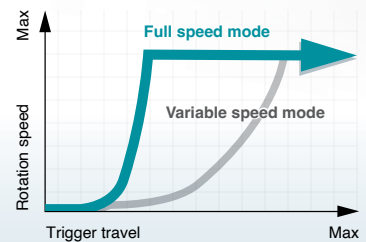

TW009GZ | TW010GZ 25.4 mm (1")

TBA RM 4,343

Cordless Impact Wrench

40Vmax



TW009G
1" (Short anvil)



TW010G
1" (Long anvil)



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah

• GZ: Without Charger, Battery & Carrying Case



Fastening Capacities	Standard Bolt: M27 - M45 (1-1/8" - 1-7/8") High Strength Bolt: M20 - M33 (3/4" - 1-3/8")
Square Drive	25.4 mm (1")
No Load Speed (RPM)	Max: 0 - 1,200 Hard: 850 Mid: 700 Soft: 600
Impacts Per Minute (IPM)	Max: 0 - 1,750 Hard: 1,500 Mid: 1,300 Soft: 1,200
Max Fastening Torque	3,150 N·m (2,323 ft lbs)
Nut-Busting Torque	4,000 N·m (2,950 ft lbs)
Dimensions (L x W x H)	TW009G 435 x 135 x 297 mm (17-1/8 x 5-5/16 x 11-3/4") TW010G 570 x 135 x 297 mm (22-1/2 x 5-5/16 x 11-3/4")
Net Weight (with battery)	TW009G 10.8 - 11.8 kg (23.8 - 26.0 lbs) TW010G 11.8 - 12.8 kg (26.0 - 28.2 lbs)

TW011GZ02 19 mm (3/4")

RM 2,750

Cordless Impact Wrench

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

NEW



TW011G
DTW1005



C ring



Standard Equipment:
Hook, Shoulder Belt

• GZ02: Without Charger & Battery



Fastening Capacities	Standard Bolt: M12 - M36 (1/2" - 1-1/2") High Strength Bolt: M10 - M27 (3/8" - 1-1/8")
Square Drive	19.0 mm (3/4")
Anvil Length	138 mm (5-7/16")
No Load Speed (RPM)	Max: 0 - 1,800 Hard: 1,100 Mid: 700 Soft: 500
Impacts Per Minute (IPM)	Max: 0 - 2,600 Hard: 2,000 Mid: 1,400 Soft: N/A
Max Fastening Torque	6-sec tightening: 1,500 N·m (1,110 ft lbs) 3-sec tightening: 1,250 N·m (N/A ft lbs)
Nut-Busting Torque	1,900 N·m (1,400 ft lbs)
Dimensions (L x W x H)	329 x 94 x 297 mm (13 x 3-11/16 x 11-3/4")
Net Weight (with battery)	4.3 - 5.5 kg (9.5 - 12.1 lbs)

TW001GM204 | TW001GZ02 19 mm (3/4")

RM 5,065 RM 2,442

Cordless Impact Wrench

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Accessories (Optional)
Extension Handle Set
Part No.
191G67-2
(RM 773.10)




C ring



Standard Equipment:
Belt Clip, Shoulder Belt (161347-8)
for GM204 & GZ02

- GM204 : 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 3
- GZ02 : Without Charger, Battery & Carrying Case



Fastening Capacities	Standard Bolt: M12 - M36 (1/2" - 1-7/16") High Strength Bolt: M10 - M27 (3/8" - 1-1/16")
Square Drive	19 mm (3/4"), C-ring
No Load Speed (RPM)	Max: 0 - 1,800 Hard: 1,400 Mid: 1,150 Soft: 950
Impacts Per Minute (IPM)	Max: 0 - 2,500 Hard: 2,400 Mid: 2,200 Soft: 1,900
Max Fastening Torque	1,800 N·m (1,330 ft lbs)
Nut-Busting Torque	2,050 N·m (1,510 ft lbs)
Dimensions (L x W x H)	217 x 94 x 297 mm (8-1/2 x 3-11/16 x 11-3/4")
Net Weight	3.9 - 4.2 kg (8.6 - 9.3 lbs)
Work Amount (approx.)	870 pcs with BL4040 x2 Tightening of M24 bolts

* All recommended selling price (RSP) shown are for reference only (exclude SST).

TW002GM201 | TW002GZ 12.7 mm (1/2")
 RM 5,000 RM 2,350

Cordless Impact Wrench
40Vmax

 *Recommended batteries
 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

Standard Equipment:
 Hook

- GM201: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 3
- GZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model



C ring



Forward/Reverse Rotation Auto Stop Mode



Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Max: 0 - 1,800 Hard: 1,000 Mid: 900 Soft: 850
Impacts Per Minute (IPM)	Max: 0 - 2,400 Hard: 2,000 Mid: 1,800 Soft: 1,700
Max Fastening Torque	1,700 N-m (1,250 ft lbs)
Nut-Busting Torque	2,200 N-m (1,620 ft lbs)
Dimensions (L x W x H)	213 x 94 x 297 mm (8-3/8 x 3-11/16 x 11-3/4")
Net Weight (with battery)	3.9 - 5.1 kg (8.6 - 11.2 lbs)

TW007GM204 | TW007GZ02 12.7 mm (1/2")
 RM 4,409 RM 1,742

Cordless Impact Wrench
40Vmax

 *Recommended batteries
 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

Standard Equipment:
 Belt Clip, Ring Set with Shoulder Belt

- GM204: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 3
- GZ02 : Without Charger, Battery & Carrying Case



*Not applicable for Z model



C ring



Forward/Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Max: 0 - 2,300 Hard: 0 - 1,900 Mid: 0 - 1,200 Soft: 0 - 600
Impacts Per Minute (IPM)	Max: 0 - 2,900 Hard: 0 - 2,700 Mid: 0 - 1,900 Soft: 0 - 1,200
Max Fastening Torque	760 N-m (560 ft lbs)
Nut-Busting Torque	1,100 N-m (810 ft lbs)
Dimensions (L x W x H)	170 x 86 x 285 mm (6-11/16 x 3-3/8 x 11-1/4")
Net Weight	2.7 - 3.3 kg (6.0 - 7.3 lbs)
Work Amount (approx.)	460pcs with BL4040 x2, Tightening of M16 bolts

TW005GD201 | TW005GZ 12.7 mm (1/2")
 RM 3,846 RM 1,484

Cordless Impact Wrench
40Vmax


 *Recommended batteries
 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

Standard Equipment:
 Belt Clip, Tool Hanger Set (191K57-9)

- GD201: 1x Fast Charger, 2x 2.5Ah Battery, 1x Makpac Connector Box Type 2
- GZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model



Pin detent



Forward/Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M10 - M20 (3/8 - 3/4") High Strength Bolt: M10 - M16 (3/8 - 5/8")
Square Drive	12.7 mm (1/2"), Pin detent
No Load Speed (RPM)	Max: 0 - 3,200 Hard: 2,600 Medium: 1,800 Soft: 1,000
Impacts Per Minute (IPM)	Max: 0 - 4,000 Hard: 3,400 Medium: 2,600 Soft: 1,800
Max Fastening Torque	350 N-m (260 ft lbs)
Nut-Busting Torque	630 N-m (465 ft lbs)
Dimensions (L x W x H)	144 x 86 x 248 mm (5-5/8 x 3-3/8 x 9-3/4")
Net Weight	1.9 - 2.2 kg (4.2 - 4.9 lbs)
Work Amount (approx.)	560 pcs with BL4025 x2 Tightening of M16 bolts

DTW1005ZX1 19 mm (3/4")
 RM 2,500

Cordless Impact Wrench
18V

NEW


TW011G DTW1005

Standard Equipment:
 Hook, Shoulder Belt

- ZX1: Without Charger & Battery



*Not applicable for Z model



C ring



Forward/Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M12 - M33 (1/2 - 1-3/8") High Strength Bolt: M10 - M24 (3/8 - 1")
Square Drive	19.0 mm (3/4")
Anvil Length	137 mm (5-3/8")
No Load Speed (RPM)	Max: 0 - 1,800 Hard: 1,000 Mid: 900 Soft: 800
Impacts Per Minute (IPM)	Max: 0 - 2,200 Hard: 1,800 Mid: 1,600 Soft: N/A
Max Fastening Torque	6-sec tightening: 1,360 N-m (1,000 ft lbs) 3-sec tightening: 1,150 N-m (N/A ft lbs)
Nut-Busting Torque	1,700 N-m (1,250 ft lbs)
Dimensions (L x W x H)	339 x 91 x 291 mm (13-3/8 x 3-5/8 x 11-1/2")
Net Weight (with battery)	3.9 - 4.2 kg (8.6 - 9.3 lbs)

DTW1001JX2 | DTW1001JX3 | DTW1001ZX2 19 mm (3/4")
 RM 3,435 RM 3,100 RM 2,081

Cordless Impact Wrench
18V



C ring

Standard Equipment:
 Shoulder Belt for JX2 & JX3

- JX2: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 3
- JX3: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box Type 3
- ZX2: Without Charger, Battery & Carrying Case



*Not applicable for Z model



C ring



Forward/Reverse Rotation Auto Stop Mode



Fastening Capacities	Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1")
Square Drive	19 mm (3/4")
No Load Speed (RPM)	Hard: 0 - 1,800 Medium: 0 - 1,000 Soft: 0 - 900
Impacts Per Minute (IPM)	Hard: 0 - 2,200 Medium: 0 - 2,000 Soft: 0 - 1,800
Max Fastening Torque	1,250 N-m (920 ft lbs)
Nut-Busting Torque	1,700 N-m (1,250 ft lbs)
Dimensions (L x W x H)	229 x 91 x 289 mm (9 x 3-5/8 x 11-3/8")
Net Weight	3.4 - 3.7 kg (7.5 - 8.2 lbs)
Work Amount (approx.)	185 pcs with BL1850B Bolts M20

* All recommended selling price (RSP) shown are for reference only (exclude SST).

 Screwing /
Drilling

Stirring

 Hammer
Drilling /
Chiselling

 Grinding /
Sanding /
Polishing

Cutting

Sawing

 Milling /
Planing

 Fastening /
Fixing

Cleaning

 Lawn Care /
Grass Care

 Tree Care /
Hedge Care

Transportation

Lights

 Comfort /
Lifestyle

 Specialty
Tools

Accessory

Makita
 100 Years

Screwing | Drilling

DTW1002JX2 RM 3,445	DTW1002JX3 RM 3,109	DTW1002JX4 RM 3,293	DTW1002ZX2 12.7 mm (1/2") RM 2,090
-------------------------------	-------------------------------	-------------------------------	--

Cordless Impact Wrench

18V

Standard Equipment:
Shoulder Belt

- JX2 : 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 3
- JX3 : 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box Type 3
- JX4 : 1x Rapid Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 3
- ZX2 : Without Charger, Battery & Carrying Case



C ring



Accessories (Optional)
Extension Handle Set
Part No. 191G67-2
(RM 773.10)



Fastening Capacities	Standard Bolt: M12 - M30 (1/2" - 1-1/4") High Tensile Bolt: M10 - M24 (3/8" - 1") 12.7 mm (1/2")
Square Drive	
No Load Speed (RPM)	Hard: 0 - 1,800 Medium: 0 - 1,000 Soft: 0 - 900
Impacts Per Minute (IPM)	Hard: 0 - 2,200 Medium: 0 - 2,000 Soft: 0 - 1,800
Max Fastening Torque	1,200 N-m (890 ft lbs)
Nut-Busting Torque	1,600 N-m (1,180 ft lbs)
Dimensions (L x W x H)	229 x 91 x 289 mm (9 x 3-5/8 x 11-3/8")
Net Weight	3.3 - 3.6 kg (7.3 - 8.0 lbs)
Work Amount (approx.)	185 pcs with BL1850B Bolts M20

DTW701TJX1 RM 3,007	DTW701ZX1 12.7 mm (1/2") RM 1,639
-------------------------------	---

Cordless Impact Wrench

18V

Standard Equipment:
Hook, Shoulder Belt for TJX1 & ZX1

- TJX1: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 3
- ZX1 : Without Charger, Battery & Carrying Case



Pin detent



Accessories (Optional)
Extension Handle Set
Part No. 191G67-2
(RM 773.10)



Fastening Capacities	Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
Square Drive	12.7mm (1/2")
No Load Speed (RPM)	Max: 0 - 2,200 Hard: 1,900 Medium: 1,200 Soft: 500
Impacts Per Minute (IPM)	Max: 0 - 2,700 Hard: 2,400 Medium: 1,700 Soft: 1,000
Max Fastening Torque	700 N-m (520 ft lbs)
Nut-Busting Torque	1,000 N-m (740 ft lbs)
Dimensions (L x W x H)	170 x 81 x 276 mm (6-11/16 x 3-3/16 x 10-7/8")
Net Weight	2.3 - 2.7 kg (5.1 - 6.0 lbs)

DTW700TJX1 RM 2,978	DTW700ZX1 12.7 mm (1/2") RM 1,607
-------------------------------	---

Cordless Impact Wrench

18V

Standard Equipment:
Hook, Shoulder Belt

- TJX1: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 3
- ZX1 : Without Charger, Battery & Carrying Case



C ring



Accessories (Optional)
Extension Handle Set
Part No. 191G67-2
(RM 773.10)



Fastening Capacities	Standard Bolt: M10 - M24 (3/8 - 1") High Strength Bolt (Grade 10.9): M10 - M16 (3/8 - 5/8") High Strength Bolt (Grade F10T): M12, M16 (7/16, 5/8")
Square Drive	12.7mm (1/2")
No Load Speed (RPM)	Max: 0 - 2,200 Hard: 1,900 Medium: 1,200 Soft: 500
Impacts Per Minute (IPM)	Max: 0 - 2,700 Hard: 2,400 Medium: 1,700 Soft: 1,000
Max Fastening Torque	700 N-m (520 ft lbs)
Nut-Busting Torque	1,000 N-m (740 ft lbs)
Dimensions (L x W x H)	170 x 81 x 276 mm (6-11/16 x 3-3/16 x 10-7/8")
Net Weight	2.3 - 2.7 kg (5.1 - 6.0 lbs)



Accessories (Optional)

Extension Handle Set
Part No. 191G67-2
RM 773.10

Adjustable overall length
Telescopic pipe section is adjustable to user's height in 5 stages by pulling the knob.

Overall length:
657 mm - 807 mm

Range of motion:
150 mm



Large two-finger trigger
ideal for continuous operation.

Hex wrench can be stored
on the main handle.

Loop handle
Auxiliary loop handle provides added control to make it easy to fit the tool socket on a target bolt.

DTW301Z RM 1,407	DTW300RTJ RM 2,782	DTW300Z 12.7 mm (1/2") RM 1,407
----------------------------	------------------------------	---

Cordless Impact Wrench

18V

Standard Equipment:
Hook, Tool Catcher Set with Shoulder Belt (197941-0)

- RTJ: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 2
- Z : Without Charger, Battery & Carrying Case



Pin detent



DTW300



C ring



Fastening Capacities	High Strength Bolt: M10 - M16 (3/8 - 5/8") Standard Bolt: M10 - M20 (3/8 - 3/4") 12.7 mm (1/2")
Square Drive	
No Load Speed (RPM)	Max: 0 - 3,200 Hard: 2,600 Medium: 1,800 Soft: 1,000
Impacts Per Minute (IPM)	Max: 0 - 4,000 Hard: 3,400 Medium: 2,600 Soft: 1,800
Max Fastening Torque	330 N-m (240 ft lbs)
Nut-Busting Torque	580 N-m (430 ft lbs)
Dimensions (L x W x H)	144 x 81 x 246 mm (5-5/8 x 3-3/16 x 9-11/16")
Net Weight	1.5 - 1.8 kg (3.4 - 4.1 lbs)

DTW181RFE 12.7 mm (1/2")

RM 1,775

Cordless Impact Wrench**18V**

C ring



Standard Equipment:

Hook

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery



*Not applicable for Z model



Reverse Rotation Auto Stop Mode

Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Strength Bolt: M6 - M12 (1/4 - 1/2")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Hard: 0 - 2,400 Soft: 0 - 1,300
Impacts Per Minute (IPM)	Hard: 0 - 3,600 Soft: 0 - 2,000
Max Fastening Torque	210 N·m (155 ft lbs)
Nut-Busting Torque	330 N·m (245 ft lbs)
Dimensions (L x W x H)	151 x 79 x 235 mm (5-15/16 x 3-1/8 x 9-1/4")
Net Weight	1.2 - 1.5 kg (2.7 - 3.4 lbs)

DTW190RFX2 | **DTW190ZX** 12.7 mm (1/2")

RM 1,590

RM 525

Cordless Impact Wrench**18V**

C ring



Standard Equipment:

Shoulder Belt, Tool Catcher (197940-2)

• RFX2 : 1x Rapid Charger, 2x 3.0Ah Battery,
• ZX : Without Charger, Battery & Carrying Case

*Not applicable for Z model



Reverse Rotation Auto Stop Mode

Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Tensile Bolt: M8 - M12 (5/16 - 1/2")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	0 - 2,300
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	190 N·m (140 ft lbs)
Nut-Busting Torque	320 N·m (235 ft lbs)
Overall Length	176 mm (6-15/16")
Net Weight	1.4 - 1.8 kg (3.2 - 3.9 lbs)
Work Amount (approx.)	630 pcs with BL1830B M12 high strength bolt fastening

TW161DZ 12.7 mm (1/2")

RM 557

Cordless Impact Wrench**12Vmax**

Standard Equipment:

Belt Clip

• DZ: Without Charger, Battery & Carrying Case



*Not applicable for Z model



Reverse Rotation Auto Stop Mode

Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Tensile Bolt: M6 - M12 (1/4 - 1/2")
Square Drive	12.7 mm (1/2")
No Load Speed (RPM)	Hard: 0 - 2,400 Soft: 0 - 1,300
Impacts Per Minute (IPM)	Hard: 0 - 3,600 Soft: 0 - 2,000
Max Fastening Torque	165 N·m (122 ft lbs)
Dimensions (L x W x H)	150 x 66 x 213 mm (5-7/8 x 2-5/8 x 8-3/8")
Net Weight	1.1 - 1.2 kg (2.4 - 2.7 lbs)

TW160DZ 9.5 mm (3/8")

RM 515

Cordless Impact Wrench**12Vmax**

Standard Equipment:

Belt Clip

• DZ: Without Charger & Battery



*Not applicable for Z model



Reverse Rotation Auto Stop Mode

Fastening Capacities	Standard Bolt: M8 - M16 (5/16 - 5/8") High Tensile Bolt: M6 - M12 (1/4 - 1/2")
Square Drive	9.5 mm (3/8")
No Load Speed (RPM)	Hard: 0 - 2,400 Soft: 0 - 1,300
Impacts Per Minute (IPM)	Hard: 0 - 3,600 Soft: 0 - 2,000
Max Fastening Torque	160 N·m (120 ft lbs)
Dimensions (L x W x H)	144 x 66 x 213 mm (5-5/8 x 2-5/8 x 8-3/8")
Net Weight	1.0 - 1.2 kg (2.2 - 2.6 lbs)

TW1000 25.4 mm (1") Square Drive

RM 3,814

Impact Wrench

• Huge 1,000 N·m (738 ft.lbs.) of power for industrial applications.



Standard Equipment:

Side Grip



Continuous Rating Input	1,200 W
Fastening Capacities	Standard Bolt: M24 - M30 (15/16 - 1-3/16") High Tensile Bolt: M22 - M24 (7/8 - 15/16")
No Load Speed (RPM)	1,400
Impacts Per Minute (IPM)	1,500
Max Fastening Torque	1,000 N·m (738 ft lbs)
Dimensions (L x W x H)	382 x 110 x 290 mm (15 x 4-5/16 x 11-3/8")
Net Weight	8.8 kg (19.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
100%
MADE IN JAPAN

Screwing | Drilling

6906 19 mm (3/4") Square Drive
RM 2,835

100mm

Impact Wrench
• Powerful 850W motor.



Standard Equipment:
Side Grip



Continuous Rating Input	850 W
Capacity	Standard Bolt: M16 - M22 (5/8 - 7/8") High Tensile Bolt: M16 - M20 (5/8 - 3/4")
No Load Speed (RPM)	1,700
Impacts Per Minute (IPM)	1,600
Max Fastening Torque	588 N-m (441 ft lbs)
Overall Length	327 mm (12-7/8")
Net Weight	5.6 kg (12.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

TW0350 12.7 mm (1/2") Square Drive
RM 1,628

411mm

Impact Wrench
• Large, efficient hammer creates more impacts for greater power.



Standard Equipment:
Socket



Continuous Rating Input	400 W
Fastening Capacities	Standard Bolt: M12 - M22 (1/2 - 7/8") High Tensile Bolt: M12 - M16 (1/2 - 5/8")
No Load Speed (RPM)	2,000
Impacts Per Minute (IPM)	2,000
Max Fastening Torque	350 N-m (260 ft lbs)
Dimensions (L x W x H)	283 x 87 x 233 mm (11-1/8 x 3-7/16 x 9-1/8")
Net Weight	3 kg (6.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

DWR180Z 9.5 mm (3/8")
RM 1,135

Cordless Ratchet Wrench

18V



Standard Equipment:
Socket Adapter

• Z: Without Charger & Battery




Fastening Capacities	Standard Bolt: M5 - M12 (3/16 - 1/2") High Strength Bolt: M5 - M10 (3/16 - 3/8") 9.5 mm (3/8") 6.35 mm (1/4")
Square Drive	
No Load Speed (RPM)	0 - 800
Max Fastening Torque	47.5 N-m (420 in lbs)
Flats Width	13 mm (1/2")
Angle Head Size	Diameter: 31 mm (1-7/32") Height: 25.5 mm (1")
Dimensions (L x W x H)	369 x 79 x 87 mm (14-1/2 x 3-1/8 x 3-7/16")
Net Weight	1.2 - 1.6 kg (2.6 - 3.5 lbs)

WR100DWA | WR100DZ 9.5 mm (3/8")
RM 1,328 | RM 935

Cordless Ratchet Wrench

12Vmax



Standard Equipment:
Socket Adapter 9.5mm & 6.35mm

• DWA: 1x Standard Charger, 1x 2.0Ah Battery, 1x Tool Bag (832071-7)
• DZ : Without Charger & Battery



Capacity	Standard Bolt: M5 - M12 (3/16 - 1/2") High Tensile Bolt: M5 - M10 (3/16 - 3/8") 9.5 mm (3/8") 6.35 mm (1/4")
Square Drive	
No Load Speed (RPM)	0 - 800
Max Fastening Torque	47.5 N-m (420 in lbs)
Dimensions (L x W x H)	341 x 67 x 63 mm (13-7/16 x 2-5/8 x 2-1/2")
Net Weight	1.0 - 1.2 kg (2.3 - 2.7 lbs)

Compatible with variable sockets with socket adapter

Able to tighten 13 mm nut onto M8 threaded rod




Accessories (Optional)



Socket Adaptor
9.5 mm (3/8")
Part No. 191A50-3
RM 117.30



Socket Adaptor
6.35 mm (1/4")
Part No. 191A51-1
RM 116.20



*13 mm nut only



Tool Bag
(Come with WR100DWA)



DTL063Z 9.5 mm (3/8")
RM 1,125

Cordless Angle Impact Wrench

18V



Standard Equipment:
Hook

• Z: Without Charger & Battery



Fastening Capacities	Standard Bolt: M4 - M12 (5/32 - 1/2") High Tensile Bolt: M4 - M8 (5/32" - 5/16") 9.5 mm (3/8")
Square Drive	
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N-m
Dimensions (L x W x H)	387 x 78 x 116 mm (15-1/4 x 3-1/16 x 4-9/16")
Net Weight	1.4 - 2.0 kg (3.1 - 4.3 lbs)

TL065DZ

RM 1,031

Cordless Angle Impact Wrench**12Vmax**

Standard Equipment:

Belt Clip

• DZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

Capacity	Standard Bolt: M4 - M12 (5/32 - 1/2") High Tensile Bolt: M4 - M8 (5/32 - 5/16")
Square Drive	9.5 mm (3/8")
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N-m (530 in lbs)
Dimensions (L x W x H)	361 x 66 x 86 mm (14-1/4 x 2-5/8 x 3-3/8")
Net Weight	1.2 - 1.6 kg (2.7 - 3.6 lbs)
Work Amount (approx.)	933 pcs with BL1021B Machine Screw M8 x 16 mm

WT001GZ M16 (5/8"), M20 (3/4"), M22 (7/8")

RM 13,387

Cordless Shear Wrench**40Vmax***Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Standard Equipment:

Screw Driver (783001-0), Shoulder Belt (161347-8),
M20 Sleeve Set (Outer sleeve 764361-9, Inner Sleeve 764417-8),
M22 Sleeve Set (Outer sleeve 153909-6, Inner Sleeve 764418-6),
Plastic Carrying Case (821921-1)

• GZ: Without Charger & Battery

**BL MOTOR XPT**

Capacity	High Strength Torque Shear Bolt (HTB): M16 (5/8"), M20 (3/4"), M22 (7/8") Super High Strength Torque Shear Bolt (SHTB): M16 (5/8"), M20 (3/4")
No Load Speed (RPM)	17
Max Fastening Torque	804 N-m (593 ft lbs)
Dimensions (L x W x H)	270 x 95 x 340 mm (10-5/8 x 3-3/4 x 13-3/8")
Net Weight	5.2 - 5.9 kg (11.5 - 13 lbs)
Work Amount (approx.)	250 pcs with BL4040 M22 (7/8") Torque Shear Bolts

DWT310ZK M20 (3/4"), M22 (7/8")

RM 12,875

Cordless Shear Wrench**18V x2**

Standard Equipment:

Screwdriver, Shoulder Belt, M20 Sleeve, M22 Sleeve

• ZK: With Carrying Case, Without Charger & Battery

**BL MOTOR XPT**

Capacity	High Strength Torque Shear Bolt (HTB): M16 (5/8") *optional, M20, M22 (3/4", 7/8") Super High Strength Torque Shear Bolt (SHTB): M16, M20 (5/8", 3/4")
No Load Speed (RPM)	14
Max Fastening Torque	804 N-m (593 ft.lbs.)
Dimensions (L x W x H)	296 x 130 x 377 mm (11-5/8 x 5-1/8 x 14-7/8")
Net Weight	6.5 - 7.1 kg (14.3 - 15.7 lbs)
Work Amount (approx.)	300 pcs with BL1850B x2 M22 (7/8") Torque Shear Bolts

Accessories (Optional)**Sleeve size reference table**

Bolt Size	Outer sleeve				Inner sleeve		
	Hex Size	L (mm)	Part No.	RSP (RM)	L (mm)	Part No.	RSP (RM)
M16	27	35	764362-7	123.20	36	764416-0	325.60
M20	32	37	764361-9	120.80	38	764417-8	307.90
M22, 7/8"	36 1-7/16"	39	153909-6	168.80	39	764418-6	425.90
M22, 7/8"	36 1-7/16"	85	764364-3	321.60	85	764352-0	587.50

**6924N** M22 (7/8"), M24 (1"), SHTB22

RM 14,790

Shear Wrench

• High rotational speed for more efficient operation.



303 mm

Continuous Rating Input	1,050 W
Capacity	Bolt: M22, M24, 7/8", 1" Super high tensile bolt: M22
No Load Speed (RPM)	19
Max Fastening Torque	1,100 N-m (810 ft lbs)
Dimensions (L x W x H)	330 x 104 x 257 mm (13 x 4-1/8 x 10-1/8")
Net Weight	7.5 kg (16.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:

Screwdriver, Sleeve M24



Accessories (Optional)							
Bolt Size	Outer sleeve				Inner sleeve		
	Hex Size	L (mm)	Part No.	RSP (RM)	L (mm)	Part No.	RSP (RM)
M22	36	49	194033-6	321.90	48	194310-6	544.70
M24	41	49	194034-4	288.40	49	194311-4	542.20
7/8"	1-7/16"	49	-	-	48	194310-6	544.70
1"	1-5/8"	49	194034-4	288.40	49	194312-2	TBA



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Screwing | Drilling

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

411

6922NB M16 (5/8"), M20 (3/4"), M22 (7/8")
RM 9,996

Shear Wrench

- Compact and lightweight yet powerful.



Standard Equipment:
Screwdriver, Sleeve M20, Sleeve M22



411

Continuous Rating Input	1,330 W
Capacity	Bolt: M16, M20, M22 (5/8", 3/4", 7/8")
No Load Speed (RPM)	18
Max Fastening Torque	804 N-m (593 ft lbs)
Dimensions (L x W x H)	249 x 84 x 252 mm (9-13/16 x 3-5/16 x 9-15/16")
Net Weight	4.9 kg (10.8 lbs)
Power Supply Cord	2.5 m (8.2 ft)



Accessories (Optional)							
Bolt Size	Outer sleeve				Inner sleeve		
	Hex Size	L (mm)	Part No.	RSP (RM)	L (mm)	Part No.	RSP (RM)
M16	27	35	764362-7	123.20	36	764416-0	325.60
M20	32	37	764361-9	120.80	38	764417-8	307.90
M22, 7/8"	36 1-7/16"	39	153909-6	168.80	39	764418-6	425.90
M22, 7/8"	36 1-7/16"	85	764364-3	321.60	85	764352-0	587.50

DG002GZ
RM 3,467

Cordless Earth Auger

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah

NEW



Standard Equipment:
Hex Wrench

• GZ: Without Charger & Battery



BL MOTOR XPT ADT

Capacity	Sandy Soil, High: 60 mm Sandy Soil, Low: 200 mm Clay Soil, High: 60 mm Clay Soil, Low: 150 mm
Max Drilling Capacity	200 mm
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 400
Max Fastening Torque	High: 55 N-m (487 in lbs) Low: 136 N-m (1,210 in lbs)
Dimensions (L x W x H)	842 x 605 x 194 mm (33-1/4 x 23-3/4 x 7-5/8")
Net Weight	6.8 - 8.0 kg (15.0 - 17.6 lbs)
Work Amount (approx.)	100 holes with BL4040 Ø 150 mm, 600 mm depth (low speed)

DG001GZ05
RM 4,550

Cordless Earth Auger

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Chuck Key S-13 (763251-3), Chuck Key
Holder, Handle Set (191P11-3), Hex Wrench,
Adapter A (327684-2), Adapter D (327687-6)

• GZ05: Without Charger & Battery




BL MOTOR XPT ADT

Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
Chuck Capacity	2 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High: 0 - 1,500 Low: 0 - 400
Max Fastening Torque	High: 55 N-m (487 in lbs) Low: 136 N-m (1,210 in lbs)
Dimensions (L x W x H)	836 x 605 x 199 mm (33 x 23-3/4 x 7-7/8")
Net Weight	7.2 - 8.1 kg (15.9 - 17.9 lbs)
Work Amount (approx.)	100 holes with BL4040 Ø 150 mm, 600 mm depth (low speed)

DDG460ZX7
RM 4,300

Cordless Earth Auger

18V x2



Standard Equipment:
Chuck Key, Hex Wrench x3 Types,
Adapter A (327684-2),
Adapter D (327687-6), Handle Set

• ZX7: Without Charger & Battery



BL MOTOR XPT ADT

Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
Chuck Capacity	2 - 13 mm (5/64 - 1/2")
No Load Speed (RPM)	High: 0 - 1,400 Low: 0 - 350
Max Fastening Torque	High: 48 N-m (430 in lbs) Low: 136 N-m (1,210 in lbs)
Dimensions (L x W x H)	840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4")
Net Weight	7.3 - 8.2 kg (16.1 - 18.1 lbs)
Work Amount (approx.)	155 holes with BL1860B x2 Ø 150 mm, 600 mm depth

FS2500 6.35 mm (1/4") Hex Shank
RM 768

Screwdriver

- Aluminum gear housing for less weight and increased durability.



Standard Equipment:
Magnetic Socket Bit



Continuous Rating Input	570 W
Capacity	Drywall Screw: 5 mm (3/16") Self-Drilling Screw: 6 mm (1/4")
No Load Speed (RPM)	0 - 2,500
Dimensions (L x W x H)	280 x 70 x 207 mm (11 x 2-3/4 x 8-1/8")
Net Weight	1.5 kg (3.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

419



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cordless Driver Drill

Model No.	Capacity		No Load Speed (RPM) High / Low	Mechanical Speed	Torque Setting	Max Torque (N.m)	Max. Fastening Torque (N.m)	Overall Length (mm)	Net Weight		
	Steel	Wood									
DF001G	20 mm	50 mm	0 - 2,600 / 0 - 650	2 Speed	21 / 41	150	Hard: 140 / Soft: 68	181	2.7 kg (5.9 lbs)	●	●
DF002G	13 mm	38 mm	0 - 2,200 / 0 - 600	2 Speed	21	70	Hard: 64 / Soft: 30	164	1.9 kg (4.2 lbs)	●	●
DDF486	13 mm	76 mm	0 - 2,100 / 0 - 550	2 Speed	21	141	Hard: 130 / Soft: 65	178	2.3 kg (5.1 lbs)	●	●
DDF458	13 mm	76 mm	0 - 2,000 / 0 - 400	2 Speed	21	110	Hard: 91 / Soft: 58	225	2.1 kg (4.7 lbs)		●
DDF489	13 mm	38 mm	0 - 1,800 / 0 - 550	2 Speed	21	110	Hard: 73 / Soft: 40	174	1.8 kg (4.0 lbs)	●	●
DDF482	13 mm	38 mm	0 - 1,900 / 0 - 600	2 Speed	21	64	Hard: 62 / Soft: 36	185	1.5 kg (3.2 lbs)		●
DDF484	13 mm	38 mm	0 - 2,000 / 0 - 500	2 Speed	21	65	Hard: 54 / Soft: 30	172	1.5 kg (3.3 lbs)	●	●
DDF490	13 mm	38 mm	0 - 1,900 / 0 - 500	2 Speed	20	65	Hard: 50 / Soft: 27	167	1.4 kg (3.1 lbs)	●	●
DDF487	13 mm	36 mm	0 - 1,700 / 0 - 500	2 Speed	20	40	Hard: 40 / Soft: 25	150	1.3 kg (2.9 lbs)	●	●
DF332D	10 mm	28 mm	0 - 1,500 / 0 - 450	2 Speed	20	38	Hard: 35 / Soft: 21	154	1 kg (2.3 lbs)	●	●
DF333D	10 mm	21 mm	0 - 1,700 / 0 - 450	2 Speed	20	34	Hard: 30 / Soft: 14	179	1.1 kg (2.4 lbs)		
DF033D	10 mm	21 mm	0 - 1,700 / 0 - 450	2 Speed	20	34	Hard: 30 / Soft: 14	149	0.9 kg (2.1 lbs)		
DF330D	10 mm	21 mm	0 - 1,300 / 0 - 350	2 Speed	18	28	Hard: 24 / Soft: 14	189	1 kg (2.2 lbs)		
DF012D	5 mm	6 mm	0 - 650 / 0 - 200	2 Speed	21	11	Hard: 5.6 / Soft: 3.6	218	0.53 kg (1.2 lbs)		

Cordless Hammer Driver Drill

Model No.	Capacity			No Load Speed (RPM) High / Low	Impacts Per Minute (IPM)	Mechanical Speed	Torque Setting	Max Torque (N.m)	Max. Fastening Torque (N.m)	Overall Length (mm)	Net Weight		
	Steel	Wood	Mansory										
HP001G	20 mm	50 mm	20 mm	0 - 2,600 / 0 - 650	High: 0 - 39,000 / Low: 0 - 9,750	2 Speed	21 / 41	150	Hard: 140 / Soft: 68	182	2.7 kg (6.0 lbs)	●	●
HP002G	13 mm	38 mm	13 mm	0 - 2,200 / 0 - 600	High: 0 - 33,000 / Low: 0 - 9,000	2 Speed	21	70	Hard: 64 / Soft: 30	174	2.0 kg (4.4 lbs)	●	●
DHP486	13 mm	76 mm	16 mm	0 - 2,100 / 0 - 550	High: 0 - 31,500 / Low: 0 - 8,250	2 Speed	21	141	Hard: 130 / Soft: 65	178	2.3 kg (5.1 lbs)	●	●
DHP458	13 mm	76 mm	16 mm	0 - 2,000 / 0 - 400	High: 0 - 30,000 / Low: 0 - 6,000	2 Speed	21	110	Hard: 91 / Soft: 58	225	2.2 kg (4.9 lbs)		●
DHP489	13 mm	38 mm	16 mm	0 - 1,800 / 0 - 550	High: 0 - 27,000 / Low: 0 - 8,250	2 Speed	21	110	Hard: 73 / Soft: 40	175	1.8 kg (4.0 lbs)	●	●
DHP482	13 mm	38 mm	13 mm	0 - 1,900 / 0 - 600	High: 0 - 28,500 / Low: 0 - 9,000	2 Speed	21	64	Hard: 62 / Soft: 36	198	1.5 kg (3.4 lbs)		●
DHP484	13 mm	38 mm	13 mm	0 - 2,000 / 0 - 500	High: 0 - 30,000 / Low: 0 - 7,500	2 Speed	21	65	Hard: 54 / Soft: 30	182	1.6 kg (3.5 lbs)	●	●
DHP490	13 mm	38 mm	13 mm	0 - 1,900 / 0 - 500	High: 0 - 28,500 / Low: 0 - 7,500	2 Speed	20	65	Hard: 50 / Soft: 27	172	1.4 kg (3.1 lbs)	●	●
DHP487	13 mm	36 mm	13 mm	0 - 1,700 / 0 - 500	High: 0 - 25,500 / Low: 0 - 7,500	2 Speed	20	40	Hard: 40 / Soft: 25	164	1.4 kg (3.1 lbs)	●	●
HP332D	10 mm	28 mm	8 mm	0 - 1,500 / 0 - 450	High: 0 - 22,500 / Low: 0 - 6,750	2 Speed	20	38	Hard: 35 / Soft: 21	168	1.1 kg (2.4 lbs)	●	●
HP333D	10 mm	21 mm	8 mm	0 - 1,700 / 0 - 450	High: 0 - 25,500 / Low: 0 - 6,750	2 Speed	20	34	Hard: 30 / Soft: 14	193	1.1 kg (2.4 lbs)		
HP330D	10 mm	21 mm	8 mm	0 - 1,500 / 0 - 400	High: 0 - 22,500 / Low: 0 - 6,000	2 Speed	18	28	Hard: 24 / Soft: 12	201	1.1 kg (2.3 lbs)		

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing | Drilling

Cordless Impact Driver


Model No.	No Load Speed (RPM)	Impacts Per Minute (IPM)	Electronic Speed	Max. Fastening Torque (N.m)	Overall Length (mm)	Net Weight		
TD004G	Max 0 - 3,900/ Hard 3,000/ Mid 2,100/ Soft 1,200	Max 0 - 3,900/ Hard 3,600/ Mid 3,100/ Soft 1,900	4	230	136	1.8 kg (4.0 lbs)	●	●
TD003G	Max 0 - 3,700/ Hard 3,200/ Mid 2,100/ Soft 1,100	Max 0 - 4,100/ Hard 3,600/ Mid 2,600/ Soft 1,400	4	210	121	1.7 kg (3.7 lbs)	●	●
DTD173	Max 0 - 3,600/ Hard 3,200/ Mid 2,100/ Soft 1,100	Max 0 - 3,800/ Hard 3,600/ Mid 2,600/ Soft 1,100	4	180	111	1.5 kg (3.3 lbs)	●	●
DTD152	0 - 2,900	0 - 3,500	-	165	137	1.3 kg (2.8 lbs)		●
DTD156	0 - 2,500	0 - 3,000	-	155	143	1.3 kg (2.9lbs)		
DTD157	0 - 3,000/ 0 - 1,300	0 - 4,100/ 0 - 2,000	2	140	133	1.2 kg (2.6 lbs)	●	●
TD111D	0 - 3,000/ 0 - 1,300	0 - 3,900/ 0 - 1,600	2	135	135	0.97 kg (2.1 lbs)	●	●
TD110D	0 - 2,600	0 - 3,500	-	110	153	1 kg (2.3 lbs)		
TD090D	0 - 2,400	0 - 3,000	-	90	155	0.92 kg (2 lbs)		
TD022D	0 - 2,450	0 - 3,000	-	25	227	0.55 kg (1.2 lbs)		

Cordless Impact Wrench

Model No.	Square Drive	No Load Speed (RPM)	Impacts Per Minute (IPM)	Max. Fastening Torque (N.m)	Nut-Busting Torque (N.m)	Overall Length (mm)	Net Weight		
TW010G	25.4 mm (1")	0 - 1,200/ 850/ 700/ 600	0 - 1,750/ 1,500/ 1,300/ 1,200	3,150 (2,323 ft.lbs.)	4,000 (2,950 ft.lbs.)	570	11.8 kg (26 lbs)	●	●
TW001G	19 mm (3/4")	0 - 1,800/ 1,400/ 1,150/ 950	0 - 2,500/ 2,400/ 2,200/ 1,900	1,800 (1,330 ft.lbs.)	2,050 (1,510 ft.lbs.)	217	3.9 kg (8.6 lbs)	●	●
TW011G	19 mm (3/4")	0 - 1,800/ 1,100/ 700/ 500	0 - 2,600/ 2,000/ 1,400	1,500 (1,110 ft.lbs.)	1,900 (1,400 ft.lbs.)	329	4.3 kg (9.5 lbs)	●	●
TW002G	12.7 mm (1/2")	0 - 1,800/ 1,000/ 900/ 850	0 - 2,400/ 2,000/ 1,800/ 1,700	1,700 (1,250 ft.lbs.)	2,200 (1,620 ft.lbs.)	213	3.9 kg (8.6 lbs)	●	●
TW007G	12.7 mm (1/2")	0 - 2,300/ 1,900/ 1,200/ 600	0 - 2,900/ 2,700/ 1,900/ 1,200	760 (560 ft.lbs.)	1,100 (810 ft.lbs.)	170	2.7 kg (6.0 lbs)	●	●
TW005G	12.7 mm (1/2")	0 - 3,200/ 2,600/ 1,800/ 1,000	0 - 4,000/ 3,400/ 2,600/ 1,800	350 (260 ft.lbs.)	630 (465 ft.lbs.)	144	1.9 kg (2.2 lbs)	●	●
DTW1005	19 mm (3/4")	0 - 1,800/ 1,000/ 900/ 800	0 - 2,200/ 1,800/ 1,600	1,360 (1,000 ft.lbs.)	1,700 (1,250 ft.lbs.)	339	3.9 kg (8.6 lbs)	●	●
DTW1001	19 mm (3/4")	0 - 1,800/ 1,000/ 900	0 - 2,200 / 2,000 / 1,800	1,250 (920 ft.lbs.)	1,700 (1,250 ft.lbs.)	229	3.4 kg (7.5 lbs)	●	
DTW1002	12.7 mm (1/2")	0 - 1,800/ 1,000/ 900	0 - 2,200 / 2,000 / 1,800	1,200 (890 ft.lbs.)	1,600 (1,180 ft.lbs.)	229	3.3 kg (7.3 lbs)	●	
DTW700 / DTW701	12.7 mm (1/2")	0 - 2,200/ 1,900/ 1,200/ 500	0 - 2,700/ 2,400/ 1,700/ 1,000	700 (520 ft.lbs.)	1,000 (740 ft.lbs.)	170	2.3 kg (5.1 lbs)	●	●
DTW300 / DTW301	12.7 mm (1/2")	0 - 3,200/ 2,600/ 1,800/ 1,000	0 - 4,000/ 3,400/ 2,600/ 1,800	330 (240 ft.lbs.)	580 (430 ft.lbs.)	144	1.5 kg (3.4 lbs)	●	●
DTW181	12.7 mm (1/2")	0 - 2,400/ 1,300	0 - 3,600/ 2,000	210 (155 ft.lbs.)	330 (245 ft.lbs.)	151	1.2 kg (2.7 lbs)	●	●
DTW190	12.7 mm (1/2")	0 - 2,300	0 - 3,000	190 (140 ft.lbs.)	310 (228 ft.lbs.)	176	1.4 kg (3.2 lbs)		
TW161D	12.7 mm (1/2")	0 - 2,400/ 1,300	0 - 3,600 / 2,000	165 (122 ft.lbs.)	290 (210 ft.lbs.)	150	1.1 kg (2.4 lbs)	●	
TW160D	9.5 mm (3/8")	0 - 2,400/ 1,300	0 - 3,600 / 2,000	160 (120 ft.lbs.)	290 (210 ft.lbs.)	144	1.0 kg (2.2 lbs)	●	

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Stirring

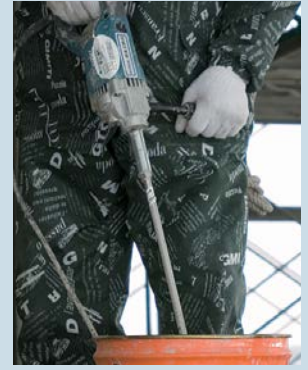

VR001G Cordless Concrete Vibrator

Accessories (Optional)

Flexible Shaft	Size	Part No.	RSP (RM)
	Ø 32-1.2 m	1910E1-5	1,505.70
	Ø 32-1.7 m	1910E2-3	1,579.10
	Ø 32-2.4 m	1910C2-9	1,634.20
	Ø 38-1.2 m	1910E3-1	1,498.20
	Ø 38-2.4 m	1910C4-5	1,586.20

Battery Case L Set
for battery BL4050F
& BL4080F.
Part No. 1910J1-0
RM 401.30



Continuous Usage Time
with BL4040
(Normal Mode)
with 28 mm-0.8 m shaft
60 min
(approx.)

VR001GZ

RM 950

Cordless Concrete Vibrator

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah
(5.0Ah & 8.0Ah only applicable with battery case L set)



Standard Equipment: Wrench

• GZ: Without Charger & Battery



Vibrations Per Minute (VPM)	Power mode: 15,500 Normal mode: 12,000
Dimensions (L x W x H)	282x112x258mm (11-1/8x4-3/8x10-1/8")
Net Weight	4.8 - 7.8kg (10.6 - 17.2lbs)
Continuous Usage Time (approx.)	Power mode: 35 min Normal mode: 50 min with BL4040 Ø 32 mm - 1.2 m shaft

DVR450Z 1,200 mm (4 ft)

RM 1,534

Cordless Concrete Vibrator

18V



• Z: Without Charger & Battery

Diameter of Vibrator	25 mm (1")
Flexible Shaft Assembly Length	1,200 mm (4.0 ft)
Vibrations Per Minute (VPM)	13,000
Dimensions (L x W x H)	1,483 x 93 x 250 mm (58-1/2 x 3-5/8 x 9-7/8")
Net Weight	3.3 - 3.8 kg (7.3 - 8.3 lbs)
Continuous Usage Time (approx.)	41 min with BL1850B

VR001CZ | VR003CZ 1.5m | VR002CZ | VR004CZ 3.0m

RM 11,600

RM 11,710

RM 12,400

RM 12,500

Battery Powered Concrete Vibrator



WHILE STOCK LAST

VR001C / VR003C

VR002C / VR004C



• CZ: Without Charger & Battery

Diameter of Vibrator	VR001C VR002C 43 mm (1-11/16") VR003C VR004C 52 mm (2")
Flexible Shaft Assembly Length	VR001C VR003C 1,500 mm VR002C VR004C 3,000 mm
Vibrations Per Minute (VPM)	12,000
Net Weight	VR001C 11.8 kg (26.0 lbs) with PDC01 VR003C 12.6 kg (27.8 lbs) with PDC01 VR002C 12.9 kg (28.4 lbs) with PDC01 VR004C 13.7 kg (30.2 lbs) with PDC01
Continuous Usage Time (approx.)	VR001C VR002C 300 min with PDC1200 100 min with PDC01 (BL1860B x4) VR003C VR004C 200 min with PDC1200 60 min with PDC01 (BL1860B x4)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Stirring

UT001G Cordless Mixer

Mixing speed selectable according to a variety of material

Possible to adjust blade speed even finer according to material.



Mechanical 2-speed gearing

Variable speed control by dial



High speed
(0 - 920 min⁻¹) for fast mixing of medium viscous material such as mortar or paint.



Low speed
(0 - 500 min⁻¹) for mixing high viscous material such as concrete.

Max blade diameter
Ø240 mm



UT001GZ

RM 2,550

Cordless Mixer

40Vmax



* Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Mixing Blade, Shaft, Shaft Holder, Wrenches

• GZ: Without Charger & Battery



Max Output	1,200 W
Blade Diameter	240 mm (9-1/2")
No load speed (RPM)	High: 0 - 920 Low: 0 - 500
Dimensions (L x W x H)	373 x 458 x 235 mm (14-3/4 x 18 x 9-1/4")
Net Weight	5.7 - 7.0 kg (12.6 - 15.4 lbs)

DUT130Z

RM 1,732

Cordless Mixer

18V



Standard Equipment:

Mixing Blade, Shaft, Shaft Holder, Side Grip, Front Cover, Wrenches, Tool Bag

• Z : Without Charger & Battery



Blade Diameter	165 mm (6-1/2")
Shank size of tool holder portion	M12 or M14
No Load Speed (RPM)	High: 0 - 1,300 Low: 0 - 350
Dimensions (L x W x H)	916x89x231mm (36"x3-1/2"x9-1/8")
Net Weight	2.5 - 2.8 kg (5.6 - 6.3 lbs)
Continuous Usage Time (approx.)	25 min with BL1850B One Liquid Paint 4L - High Speed

UT130S

RM 1,176

303 W

Mixer

• Heavy duty and high speed mixer.



Continuous Rating Input	850 W
Blade Diameter	165 mm (6-1/2")
No Load Speed (RPM)	1,300
Shank Size of Tool Holder Portion	M12
Dimensions (L x W x H)	942 x 87 x 152 mm (37 x 3-7/16 x 6")
Net Weight	2.6 kg (5.7 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:

Wrenches, Side Grip, Blade



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Hammer Drilling Chiselling

HR006GZ 52 mm (2-1/16") RM 6,998

Cordless Rotary Hammer

40Vmax x2



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment: Side Handle, Side Grip,
Depth Gauge, Bit Grease, Cloth

* GZ: With Carrying Case, Without Charger & Battery



BL MOTOR XPT AVT SOFT NO LOAD AWS AFT

Impact Energy	EPTA-Procedure 05/ 2009: 21.4 J
Capacity	Concrete (TCT Bit): 52 mm (2-1/16") Concrete (Core Bit): 160 mm (6-5/16")
Impacts Per Minute (IPM)	1,100 - 2,250
No Load Speed (RPM)	150 - 310
Dimensions (L x W x H)	610 x 140 x 337 mm (24 x 5-1/2 x 13-1/4")
Net Weight	12.9 - 14.3 kg (28.4 - 31.5 lbs)
Work Amount (approx.)	44 holes with BL4040 x2 Concrete Grade 40 N/mm ² Ø 18 mm x 140 mm depth

HR005GZ 40 mm (1-9/16") RM 4,448

Cordless Rotary Hammer

40Vmax

VIDEO CLIP
Models and specs
may vary by country



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F),
5.0Ah, 8.0Ah



Standard Equipment: Side Handle,
Side Grip, Depth Gauge, Bit Grease,
Cloth

* GZ: With Carrying Case, Without Charger & Battery



BL MOTOR XPT AVT SOFT NO LOAD AWS AFT

Impact Energy	EPTA-Procedure 05/ 2009: 8 J
Capacity	Concrete (w/ TCT Bit): 40 mm (1-9/16")
Impacts Per Minute (IPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Dimensions (L x W x H)	484 x 117 x 285 mm (19 x 4-5/8 x 11-1/4")
Net Weight	7.5 - 8.0 kg (16.5 - 17.6 lbs)
Work Amount (approx.)	16 holes with BL4040 Concrete Grade 40 N/mm ² Ø 20 mm x 140 mm depth

HR008GM201 | HR008GZ 30 mm (1-3/16") RM 5,354 | RM 2,715

Cordless Combination Hammer

40Vmax

VIDEO CLIP
Models and specs
may vary by country



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah

WHILE
STOCK
LAST



Standard Equipment:
Spacer Set (191191-5), Dustcup Set
(195173-3), Cloth (443122-7),
Grease Vessel Set (194683-7),
Depth Gauge (331886-4)

* GM201: 1x Fast Charger, 2x 4.0Ah Battery

* GZ: Without Charger, Battery & Carrying Case



BL MOTOR XPT AVT AWS AFT

Accessories (Optional)
DX10 Dust
Extraction System
Part No. 191F95-1 (RM 718.20)



Impact Energy	EPTA-Procedure 05/ 2009: 3.9 J Our experimental conditions: 4.5 J
Capacity	Concrete (TCT Bit): 30 mm (1-3/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 80 mm (3-1/8") Diamond Core Bit: 80 mm (3-1/8")
Impacts Per Minute (IPM)	0 - 4,500
No Load Speed (RPM)	0 - 840
Dimensions (L x W x H)	422 x 97 x 242 mm (16-5/8 x 3-13/16 x 9-1/2")
Net Weight	5.2 - 6.8 kg (11.5 - 15.0 lbs)
Work Amount (approx.)	109 holes with BL4040 Concrete Grade 40 N/mm ² Ø 10.5 mm x 60 mm depth

HR007GZ 28 mm (1-1/8") RM 2,040

Cordless Combination Hammer

40Vmax

VIDEO CLIP
Models and specs
may vary by country



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)




Standard Equipment:
Side Grip, Depth Gauge, Cloth,
Grease Vessel, Air Duct Cap

* GZ: Without Charger, Battery & Carrying Case



Accessories (Optional)
DX15 Dust
Extraction System
Part No. 191X39-9 (RM 889.10)



Impact Energy	EPTA-Procedure 05/ 2009: 3.0 J
Capacity	Masonry: 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 54 mm (2-1/8") Diamond Core Bit: 65 mm (2-9/16")
Impacts Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Dimensions (L x W x H)	458 x 101 x 234 mm (18 x 4 x 9-1/4")
Net Weight	3.8 - 4.8 kg (8.4 - 10.6 lbs)
Work Amount (approx.)	118 holes with BL4040 Concrete Grade 40 N/mm ² Ø 10.5 mm x 60 mm depth

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Hammer Drilling | Chiselling

HR002GM201 28 mm (1-1/8")
RM 5,404

Cordless Combination Hammer

40Vmax



* Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment: Side Grip, Depth Gauge, Cloth,
Grease Vessel (194683-7), Drill Chuck (199139-5)

* GM201: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 4



Impact Energy	EPTA-Procedure 05/ 2009: 2.9 J
Capacity	Concrete: 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 54 mm (2-1/8") Diamond Core Bit (Dry Type): 65 mm (2-9/16")
Impact Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Dimensions (L x W x H)	389 x 102 x 232 mm (15-1/4 x 4 x 9-1/8")
Net Weight	4.1 - 4.6 kg (9.0 - 10.1 lbs)
Work Amount (approx.)	138 holes with BL4040 Concrete Grade 40 N/mm ² Ø 10.5 mm x 60 mm depth

HR001GM201 28 mm (1-1/8")
RM 5,100

Cordless Combination Hammer

40Vmax

VIDEO CLIP
Models and specs
may vary by country



HR001G



* Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment: Side Grip, Depth Gauge, Cloth,
Grease Vessel (194683-7)

* GM201: 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4



Impact Energy	EPTA-Procedure 05/ 2009: 2.8 J Our experimental conditions: 3.2 J
Capacity	Concrete: 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 54 mm (2-1/8") Diamond Core Bit (Dry Type): 65 mm (2-9/16")
Impact Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Dimensions (L x W x H)	358 x 102 x 232 mm (14-1/8 x 4 x 9-1/8")
Net Weight	3.9 - 4.6 kg (8.6 - 10.1 lbs)
Work Amount (approx.)	138 holes with BL4040 Concrete Grade 40 N/mm ² Ø 10.5 mm x 60 mm depth

HR003GM201 | HR003GZ 28 mm (1-1/8")
RM 4,620 | RM 1,959

Cordless Combination Hammer

40Vmax




* Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment: Side Grip, Depth Gauge

* GM201: 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
* GZ : Without Charger, Battery & Carrying Case



Impact Energy	EPTA-Procedure 05/ 2009: 2.8 J Our experimental conditions: 3.2 J
Capacity	Concrete: 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 54 mm (2-1/8") Diamond Core Bit (Dry Type): 65 mm (2-9/16")
Impact Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Dimensions (L x W x H)	358 x 121 x 232 mm (14-1/8 x 4-3/4 x 9-1/8")
Net Weight	3.9 - 4.6 kg (8.6 - 10.1 lbs)
Work Amount (approx.)	138 holes with BL4040 Concrete Grade 40 N/mm ² Ø 10.5 mm x 60 mm depth

HR010GD201 | HR010GZ 20 mm (13/16")
RM 4,417 | RM 2,071

Cordless Combination Hammer

40Vmax

VIDEO CLIP
Models and specs
may vary by country



HR010G




* Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment: Side Grip, Depth Gauge
HR010GD201: 1x DX16 Dust
Collection System Set, 5x Sealing Cap

* GD201: 1x Fast Charger, 2x 2.5Ah Battery,
1x Makpac Connector Case (Type 4)
* GZ : Without Charger, Battery & Carrying Case



Impact Energy	EPTA-Procedure 05/2009: 2.1 J
Max Output	1000 W
Capacity	Concrete (with TCT bit): 20 mm (13/16") Steel: 13 mm (1/2") Wood: 26 mm (1") Core Bit: 35 mm (1-3/8") Diamond Core Bit: 35 mm (1-3/8")
No Load Speed (RPM)	0 - 1,350
Dimensions (L x W x H)	289 x 93 x 217 mm (11-3/8 x 3-5/8 x 8-1/2")
Net Weight	2.8 - 4.5 kg (6.2 - 9.9 lbs)
Work Amount (approx.)	75 holes with BL4025 Masonry drill Ø 10.5 mm concrete 40 N/mm ² Depth 60 mm



* All recommended selling price (RSP) shown are for reference only (exclude SST).

DHR282 Cordless Combination Hammer

Accessories (Optional)

DX08

for DHR280, DHR282

Dust extraction system set
Part No. 199579-7
RM 755.50

HEPA Filter
Part No. 199557-7
RM 57.30

Dust case
Part No. 199555-1
RSP TBA

Dust cup
Part No. 195173-3
RM 30

DHR282Z 28 mm (1-1/8")
RM 2,028

Cordless Combination Hammer

18V x2

Standard Equipment:

Side Grip, Depth Gauge,
Cleaning Cloth, Bit Grease (194683-7)

• Z: Without Charger, Battery & Carrying Case

 *Not applicable for Z model

BL MOTOR XPT AVT SOFT NO LOAD AFT AWS

Accessories (Optional)

DX08 Dust Extraction System Set
Part No. 199579-7
(RM 755.50)

Impact Energy	EPTA-Procedure 05/2009: 2.8 J Our experimental conditions: 3.2 J
Capacity	Concrete: 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 54 mm (2-1/8") Diamond Core Bit (Dry Type): 65 mm (2-9/16")
Impacts Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Max Output	680 W
Dimensions (L x W x H)	373 x 134 x 232 mm (14-3/4 x 5-1/4 x 9-1/8")
Net Weight	3.9 - 5.0 kg (8.6 - 11.0 lbs)
Work Amount (approx.)	187 holes with BL1850B x2 Concrete Grade 40 Ø 10.5 mm x 60 mm Depth

DHR242RTE | **DHR242RFE** | **DHR242Z** 24 mm (15/16")
RM 2,742 | RM 2,406 | RM 1,365

Cordless Combination Hammer

18V

Standard Equipment:

Depth Gauge, Side Grip

• RTE: 1x Rapid Charger, 2x 5.0Ah Battery
• RFE: 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case

 *Not applicable for Z model

BL MOTOR XPT

Accessories (Optional)

DX01 Dust Extraction System Set
Part No. 195896-3
(RM 630.60)

Impact Energy	2 J
Capacity	Concrete: 24 mm (15/16") Steel: 13 mm (1/2") Wood: 27 mm (1-1/16")
Impacts Per Minute (IPM)	0 - 4,700
No Load Speed (RPM)	0 - 950
Dimensions (L x W x H)	328 x 85 x 213 mm (12-7/8 x 3-3/8 x 8-3/8")
Net Weight	3.1 - 3.8 kg (6.7 - 8.4 lbs)
Work Amount (approx.)	95 holes with BL1850B Masonry Drill Ø 10.5 mm Concrete Depth 60 mm

DHR241RFE 20 mm (13/16")
RM 2,040

Cordless Combination Hammer

18V

Standard Equipment:

Depth Gauge, Side Grip

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery

 *Not applicable for Z model

BL MOTOR XPT

Impact Energy	1.9 J
Capacity	Concrete: 20 mm (13/16") Steel: 13 mm (1/2") Wood: 26 mm (1")
Impacts Per Minute (IPM)	0 - 4,000
No Load Speed (RPM)	0 - 1,100
Dimensions (L x W x H)	417 x 84 x 219 mm (16-3/8 x 3-5/16 x 8-5/8")
Net Weight	3.2 - 4.0 kg (7.1 - 8.8 lbs)
Work Amount (approx.)	133 holes with BL1850B Masonry drill Ø 16.5 mm Concrete Depth 40 mm

DHR202RFE | **DHR202Z** 20 mm (13/16")
RM 2,040 | RM 989

Cordless Combination Hammer

18V

Standard Equipment:

Depth Gauge, Side Grip

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case

 *Not applicable for Z model

BL MOTOR XPT

Impact Energy	EPTA-Procedure 05/ 2009: 2 J
Capacity	Concrete: 20 mm (13/16") Steel: 13 mm (1/2") Wood: 26 mm (1")
Impacts Per Minute (IPM)	0 - 4,000
No Load Speed (RPM)	0 - 1,100
Dimensions (L x W x H)	358 x 84 x 259 mm (14-1/8 x 3-5/16 x 10-1/4")
Net Weight	3.2 - 4.0 kg (7.1 - 8.8 lbs)
Work Amount (approx.)	130 holes with BL1850B Masonry drill Ø 6.5 mm Concrete Depth 60 mm

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Hammer Drilling | Chiselling

DHR183RTWJ | DHR183Z 18 mm (11/16")
RM 3,028 RM 1,545

Cordless Rotary Hammer

18V



2 modes



Standard Equipment:
Side Grip, Depth Gauge

- RTWJ : 1x Rapid Charger, 2x 5.0Ah Battery, 1x DX16 Dust Collection System Set, 5x Sealing Cap, 1x Makpac Connector Case Type 4
- Z : Without Charger & Battery

DX16 Dust Collection System Set
Part No. 1911P2-6
(RM 416.40)

Come with DHR183RTWJ
Optional for DHR183Z



*Not applicable for Z model

BL MOTOR AVT XPT

Impact Energy	EPTA-Procedure 05/2009: 1.7 J Our experimental conditions: 1.7 J
Capacity	Concrete: 18 mm (11/16") Steel: 13 mm (1/2") Wood: 24 mm (15/16")
Blows Per Minute (BPM)	0 - 5,000
No Load Speed (RPM)	0 - 1,100
Dimensions (L x W x H)	288 x 89 x 215 mm (11-3/8 x 3-1/2 x 8-1/2")
Net Weight	2.1 - 2.9 kg (4.6 - 6.4 lbs)
Work Amount (approx.)	105 holes with BL1860B Mansory Drill Ø 10.5 mm concrete 40 N/mm ² Depth 60 mm

DHR182ZWJ 18 mm (11/16")
RM 1,765

Cordless Combination Hammer

18V



3 modes



Standard Equipment:
Side Grip, Depth Gauge

- ZWJ : Without Charger, Battery, 1x DX05 Dust Extraction System Set, 1x Makpac Connector Box

Come with DX05 Dust Extraction System Set
Part No. 199658-1
(RM 463.10)



*Not applicable for Z model

BL MOTOR XPT AVT AWS

Impact Energy	EPTA-Procedure 05/ 2009: 1.7 J Our experimental conditions: 1.6 J
Capacity	Concrete: 18 mm (11/16") Core Bit: 35 mm (1-3/8") Diamond Core Bit (Dry Type): 32 mm (1-1/4") Steel: 13mm (1/2") Wood: 24 mm (15/16")
Impacts Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 1,350
Max Output	450 W
Dimensions (L x W x H)	301 x 82 x 285 mm (11-7/8 x 3-1/4 x 11-1/4")
Net Weight	2.4 - 3.2 kg (5.3 - 7.0 lbs)
Work Amount (approx.)	140 holes with BL1850B Mansory Drill Ø 6.5 mm Concrete 40 N/mm ² Depth 60 mm

HR166DSMJ | HR166DZK | HR166DZ 16 mm (5/8")
RM 1,732 RM 873 **NEW** RM 873

Cordless Rotary Hammer

12Vmax



2 modes



Standard Equipment:
Side Grip, Depth Gauge

- DSMJ : 1x Speed Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 2
- DZK : With Carrying Case, Without Charger & Battery
- DZ : Without Charger, Battery & Carrying Case



HR166D



*Not applicable for Z model

BL MOTOR

Impact Energy	EPTA-Procedure 05/2009: 1.1 J Our experimental conditions: 1.0 J
Capacity	Concrete: 16 mm (5/8") Steel: 10 mm (3/8") Wood: 13 mm (1/2")
Impacts Per Minute (IPM)	0 - 4,800
No Load Speed (RPM)	0 - 680
Dimensions (L x W x H)	BL1021B: 250 x 74 x 187 mm (9-7/8 x 2-15/16 x 7-3/8")
Net Weight	1.8 - 2.4 kg (4.1 - 5.4 lbs)
Work Amount (approx.)	42 holes with BL1021B Mansory drill Ø 6 mm Concrete 40 N/mm ² Depth 40 mm

HR5212C 52 mm (2-1/16")
RM 4,695

Rotary Hammer

- **Soft start suppresses start-up reaction for more control and better accuracy.**



Standard Equipment:
Side Handle, Side Grip, Depth Gauge, Grease Vessel, Cloth



Continuous Rating Input	1,510 W
Impact Energy	EPTA-Procedure 05/2009: 20 J Our experimental conditions: 21 J
Capacity	Concrete (T.C.T. bit): 52 mm (2") Concrete (Core bit): 160 mm (6-5/16")
Impacts Per Minute (IPM)	1,100 - 2,250
No Load Speed (RPM)	150 - 310
Dimensions (L x W x H)	599 x 140 x 287 mm (23-1/2 x 5-1/2 x 11-1/4")
Net Weight	11.9 - 12.0 kg (26.2 - 26.5 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HR4511C 45 mm (1-3/4")
RM 4,432

Rotary Hammer

- **High performance and low vibration.**



Standard Equipment:
Side Handle (D), Side Grip, Depth Gauge, Grease Vessel, Cloth



Continuous Rating Input	1,350 W
Impact Energy	EPTA-Procedure 05/2009: 9.4 J Our experimental conditions: 12.5 J
Capacity	Concrete (T.C.T. bit): 45 mm (1-3/4") Concrete (Core bit): 125 mm (5")
Impacts Per Minute (IPM)	1,250 - 2,750
No Load Speed (RPM)	130 - 280
Dimensions (L x W x H)	458 x 136 x 288 mm (18 x 5-3/8 x 11-3/8")
Net Weight	9.0 - 9.1 kg (19.8 - 20.1 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HR4013C 40 mm (1-9/16")
RM 3,476

Rotary Hammer

- **Soft start suppresses start-up reaction for more control and better accuracy.**



Standard Equipment:
Depth Gauge, Side Handle (D), Side Grip, Bit Grease, Cloth



Continuous Rating Input	1,100 W
Impact Energy	EPTA-Procedure 05/2009: 8 J Our experimental conditions: 11.4 J
Capacity	Concrete (T.C.T. bit): 40 mm (1-9/16") Concrete (Core bit): 105 mm (4-1/8")
Impacts Per Minute (IPM)	1,450 - 2,900
No Load Speed (RPM)	250 - 500
Dimensions (L x W x H)	479 x 112 x 263 mm (18-11/16 x 4-3/8 x 10-3/8")
Net Weight	6.8 - 6.9 kg (14.9 - 15.3 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HR4002 40 mm (1-9/16")
RM 2,395

Rotary Hammer

- **No hammering when idling increases the tool life and performance.**



Standard Equipment:
Side Grip, Bit Grease, Depth Gauge



Continuous Rating Input	1,050 W
Impact Energy	EPTA-Procedure 05/2009: 6.1 J Our experimental conditions: 6.2 J
Capacity	Concrete (T.C.T. bit): 40 mm (1-9/16") Concrete (Core bit): 105 mm (4-1/8")
Impacts Per Minute (IPM)	2,500
No Load Speed (RPM)	680
Dimensions (L x W x H)	458 x 114 x 256 mm (18 x 4-1/2 x 10-1/8")
Net Weight	6.6 - 6.8 kg (14.6 - 15.0 lbs)
Power Supply Cord	5.0 m (16.4 ft)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Hammer Drilling | Chiselling

HR3210C 32 mm (1-1/4")

RM 3,203

350

Combination Hammer

• 3-Mode operation; rotation only, hammering with rotation and hammering only.



Standard Equipment:
Depth Gauge, Side Grip,
Grease vessel



Continuous Rating Input	850 W
Impact Energy	EPTA-Procedure 05/2009: 5 J Our experimental conditions: 5.5 J
Capacity	Concrete (T.C.T. bit): 32 mm (1-1/4") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Concrete (Core bit): 90 mm (3-1/2")
Impacts Per Minute (IPM)	1,650 - 3,300
No Load Speed (RPM)	315 - 630
Dimensions (L x W x H)	398 x 114 x 239 mm (15-5/8 x 4-1/2 x 9-3/8")
Net Weight	5.2 - 5.6 kg (11.4 - 12.4 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HR3200C 32 mm (1-1/4")

RM 2,887

350

Combination Hammer

• 3-Mode operation; rotation only, hammering with rotation and hammering only.



Standard Equipment:
Depth Gauge, Side Grip,
Grease Vessel (181573-3)



Continuous Rating Input	850 W
Impact Energy	EPTA-Procedure 05/2009: 5.1 J Our experimental conditions: 5.5 J
Capacity	Concrete (T.C.T. bit): 32 mm (1-1/4") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	1,650 - 3,300
No Load Speed (RPM)	315 - 630
Dimensions (L x W x H)	398 x 108 x 239 mm (15-5/8 x 4-1/4 x 9-3/8")
Net Weight	4.8 - 5.2 kg (10.5 - 11.5 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HR3011FCJ 30 mm (1-3/16")

RM 1,807

350

Combination Hammer

• 3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only".



Standard Equipment:
Depth Gauge, Side Grip



Continuous Rating Input	1,050 W
Impact Energy	EPTA-Procedure 05/2009: 3.9 J Our experimental conditions: 4.5 J
Capacity	Concrete (Core Bit): 80 mm (3-1/8") Concrete (Diamond Core Bit): 80 mm (3-1/8") Concrete (TCT Bit): 30 mm (1-3/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	0 - 4500
Dimensions (L x W x H)	369 x 98 x 242 mm (14-1/2 x 3-7/8 x 9-1/2")
Net Weight	4.4 - 4.8 kg (9.7 - 10.6 lbs)
Power Supply Cord	4.0 m (13.1 ft)

HR3001CJ 30 mm (1-3/16")

RM 1,628

350

Combination Hammer

• 3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only".



Standard Equipment:
Depth Gauge, Side Grip



Continuous Rating Input	1,050 W
Impact Energy	EPTA-Procedure 05/2009: 3.9 J Our experimental conditions: 4.5 J
Capacity	Concrete (Core Bit): 80 mm (3-1/8") Concrete (Diamond Core Bit): 80 mm (3-1/8") Concrete (TCT Bit): 30 mm (1-3/16") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	0 - 4500
Dimensions (L x W x H)	369 x 98 x 226 mm (14-1/2 x 3-7/8 x 8-7/8")
Net Weight	4.1 - 4.5 kg (9.0 - 9.9 lbs)
Power Supply Cord	4.0 m (13.1 ft)

HR2810 28 mm (1-1/8")

RM 1,378

325

Combination Hammer

• 3-Mode operation; rotation only, hammering with rotation and hammering only.



Standard Equipment:
Depth Gauge, Side Grip



Continuous Rating Input	800 W
Impact Energy	EPTA-Procedure 05/2009: 2.8 J Our experimental conditions: 2.9 J
Capacity	Concrete (T.C.T. bit): 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Dimensions (L x W x H)	314 x 89 x 225 mm (12-3/8 x 3-1/2 x 8-7/8")
Net Weight	3.4 - 3.8 kg (7.5 - 8.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

HR2670X5 26 mm (1")

RM 904

Combination Hammer

Standard Equipment:
Side Handle, Depth Gauge, Drill Chuck (194041-7), SDS-Plus Bit Set (D-17784), Bull Point (D-08713)



Continuous Rating Input	800 W
Impact Energy	3.0 J
Capacity	Concrete: 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit: 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,500
Dimensions (L x W x H)	362 x 77 x 207 mm (14-1/4 x 3 x 8-1/8")
Net Weight	2.9 - 3.4 kg (6.4 - 7.5 lbs)
Power Supply Cord	4.0 m (13.1 ft)

HR2652 26 mm (1")

RM 1,312

325

Combination Hammer with Self Dust Collection

• See-through dust case for easy checking of collected dust amount.



Standard Equipment:
Side Grip, Depth Gauge, Sealing Cap



Continuous Rating Input	800 W
Impact Energy	EPTA-Procedure 05/2009: 2.2 J Our experimental conditions: 2.9 J
Capacity	Concrete: 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit: 80 mm (3-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	0 - 4,600
No Load Speed (RPM)	0 - 1,200
Dimensions (L x W x H)	604 x 89 x 260 mm (23-3/4 x 3-1/2 x 10-1/4")
Net Weight	3 - 4.3 kg (6.7 - 9.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

HR2470X5 24 mm (15/16")

RM 904

325

Combination Hammer

Standard Equipment:
Side Handle, Depth Gauge, Drill Chuck (194041-7), SDS-Plus Bit Set (D-17784), Bull Point (D-08713)



Continuous Rating Input	780 W
Impact Energy	EPTA-Procedure 05/2009: 2.4 J Our experimental conditions: 2.7 J
Capacity	Concrete: 24 mm (15/16") Core Bit: 54 mm (2-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Impacts Per Minute (IPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Dimensions (L x W x H)	370 x 84 x 214 mm (14-1/2 x 3-5/16 x 8-3/8")
Net Weight	2.9 - 3.3 kg (6.4 - 7.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

HM002GZ03

RM 4,896

Cordless Demolition Hammer

40Vmax x2



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment: Bull Point (A-80787), Bit Grease (194683-7), Side Handle, Cloth

• GZ03: With Carrying Case, Without Charger & Battery



Impact Energy	EPTA-Procedure 05/2009: 20.9 J
Impacts Per Minute (IPM)	950 - 1,900
Shank Diameter	18 mm (11/16")
Dimensions (L x W x H)	574 x 146 x 324 mm (22-5/8 x 5-3/4 x 12-3/4")
Net Weight	12.0 - 13.3 kg (26.5 - 29.3 lbs)
Work Amount (approx.)	28.3 kg with BL4040 x2 Concrete Grade 40 N/mm²

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Hammer Drilling | Chiselling

HM001GZ

RM 2,550

Cordless Demolition Hammer

40Vmax



HM001G



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment: Bit Grease (194683-7), Side Grip, Cloth

• GZ : With Carrying Case, Without Charger & Battery



Impact Energy	EPTA-Procedure 05/ 2009: 9.4 J
Impacts Per Minute (IPM)	0 - 2,650
Shank Diameter	18 mm (11/16")
Dimensions (L x W x H)	481 x 113 x 258 mm (19 x 4-7/16 x 10-1/8")
Net Weight	6.3 - 7.1 kg (13.9 - 15.7 lbs)
Work Amount (approx.)	13.6 kg with BL4040 Concrete Grade 4 0 N/mm²

HM1306 30 mm (1-3/16") Hex Shank

RM 3,404

204

Demolition Hammer

• Powerful 1,510 W motor.



Standard Equipment:
Bull Point, Wrench, Side Handle,
Oil Supply 100ml



Continuous Rating Input	1,510 W
Impact Energy	EPTA-Procedure 05/2009: 21.7 J Our experimental conditions: 28.8 J
Impacts Per Minute (IPM)	1,450
Dimensions (L x W x H)	652 x 121 x 231 mm (25-3/4 x 4-3/4 x 9-1/8")
Net Weight	15.1 kg (33.3 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM1213C

RM 3,728

175

Demolition Hammer

• Vibration absorbing handle
provides comfortable operation.



Standard Equipment:
Bull Point, Bit Grease, Side Handle, Cloth



Continuous Rating Input	1,510 W
Impact Energy	EPTA-Procedure 05/2009: 18.6 J Our experimental conditions: 25.5 J
Impacts Per Minute (IPM)	950 - 1,900
Dimensions (L x W x H)	576 x 149 x 265 mm (22-3/4 x 5-7/8 x 10-3/8")
Net Weight	10.8 kg (23.7 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM1201 21 mm (13/16") Hex Shank

RM 2,993

155

Demolition Hammer

• Powerful impact from durable
aluminum body.



Standard Equipment: Bull Point,
Hex Wrench, Side Grip



Continuous Rating Input	1,130 W
Impact Energy	Our experimental conditions: 13 J
Impacts Per Minute (IPM)	2,000
Overall Length	480 mm (18-7/8")
Net Weight	9.1 kg (20.1 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM0871C

RM 2,257

350

Demolition Hammer

• High durability and excellent
demolition performance.



Standard Equipment:
Grease for Bit, Side Handle, Cloth



Continuous Rating Input	1,100 W
Impact Energy	EPTA-Procedure 05/2009: 8.1 J Our experimental conditions: 11.6 J
Impacts Per Minute (IPM)	1,100 - 2,650
Dimensions (L x W x H)	466 x 116 x 230 mm (18-3/8 x 4-9/16 x 9")
Net Weight	5.6 - 5.8 kg (12.4 - 12.8 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM0870C

RM 1,890

350

Demolition Hammer

• Compact power with less weight.



Standard Equipment:
Grease for Bit, Side Handle, Cloth



Continuous Rating Input	1,100 W
Impact Energy	EPTA-Procedure 05/2009: 7.6 J Our experimental conditions: 11.4 J
Impacts Per Minute (IPM)	1,100 - 2,650
Dimensions (L x W x H)	449 x 109 x 230 mm (17-3/4 x 4-1/4 x 9")
Net Weight	5.1 - 5.3 kg (11.1 - 11.6 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM0810TA 17 mm (11/16") Hex Shank

RM 1,482

105

Demolition Hammer

• Ideal for light chiseling, chipping
and scaling operations.



Standard Equipment:
Bull Point, Hex Wrench, Side Grip



Continuous Rating Input	900 W
Impact Energy	EPTA-Procedure 05/2009: 7.2 J Our experimental conditions: 7.6 J
Impacts Per Minute (IPM)	2,900
Overall Length	428 mm (16-7/8")
Net Weight	6.3 kg (13.9 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM004GZ05

RM 12,500

Cordless Breaker

40Vmax x2



*Recommended batteries
4.0Ah, 4.0Ah (F),
5.0Ah, 8.0Ah
Not compatible with
2.0Ah & 2.5Ah batteries



HM004G

Standard Equipment:
Hex Wrench, Self-Sharpening Bull Point (B-10372)

• GZ05: Without Charger & Battery



Impact Energy	72.8 J (53.7 ft.lbs.)
Blows Per Minute (BPM)	870
Shank Diameter	Hex 28.6 mm (1-1/8")
Dimensions (L x W x H)	882 x 227 x 540 mm (34-3/4 x 8-15/16 x 21-1/4")
Net Weight (with battery)	29.7 - 32.1 kg (65.5 - 70.8 lbs)
Work Amount (approx.)	946 kg with BL4080F x 2 Concrete 1000 x 800 x 300 mm chipped Grade 40 or 20 min continues usage

HM1501 30 mm (1-3/16") Hex Shank

RM 5,556

218

Electric Breaker

• Both drastically increased power and low vibration are achieved with minimum increase in tool size and weight.



Standard Equipment: Side Handle, Bull Point



Continuous Rating Input	1,850 W
Impact Energy	EPTA-Procedure 05/2009: 48.1 J
Impacts Per Minute (IPM)	1,300
Dimensions (L x W x H)	781 x 130 x 266 mm (30-3/4 x 5-1/8 x 10-1/2")
Net Weight	18.4 kg (40.6 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HM1317C 30 mm (1-3/16") Hex Shank

RM 4,810

175

Electric Breaker

• High durability and excellent demolition performance.



Standard Equipment: Side Handle



Continuous Rating Input	1,510 W
Impact Energy	EPTA-Procedure 05/2009: 25 J (100-127 V: 21) Our experimental conditions: 33.8 J
Impacts Per Minute (IPM)	730 - 1,450
Dimensions (L x W x H)	715 x 129 x 266 mm (28-1/8 x 5-1/8 x 10-1/2")
Net Weight	17 kg (37.5 lbs)
Power Supply Cord	5.0 m (16.4 ft)

HP1630 16 mm (5/8")

RM 401

85

Hammer Drill

• Lightweight with large drilling capacity up to 16 mm in concrete.



Standard Equipment: Side Handle, Chuck Key



Continuous Rating Input	710 W
Capacity	Concrete: 16 mm (5/8") Steel: 13 mm (1/2") Wood: 30 mm (1-3/16")
No Load Speed (RPM)	0 - 3,200
Impacts Per Minute (IPM)	0 - 48,000
Dimensions (L x W x H)	296 x 75 x 204 mm (11-5/8 x 2-15/16 x 8")
Net Weight	2.1 kg (4.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

**Demolition Hammer/ Breaker Capability Chart****Cordless Breaker**

Model	Shank Type	Powered	Impact Energy (EPTA-Procedure 05/2009)	Net Weight	AVT	Soft No Load
HM004G	28.6 mm Hex Shank	40Vmax x2	72.8 J	30.0 - 32.4 kg (66.1 - 71.4 lbs)	•	•

Cordless Demolition Hammer

Model	Shank Type	Powered	Impact Energy (EPTA-Procedure 05/2009)	Net Weight	AVT	Soft No Load
HM002G	SDS-MAX Shank	40Vmax x2	20.9 J	12.0 - 13.3 kg (26.5 - 29.3 lbs)	•	•
HM001G	SDS-MAX Shank	40Vmax	9.4 J	6.3 - 7.1 kg (13.9 - 15.7 lbs)	•	•

Demolition Hammer/ Electric Breaker

Model	Shank Type	Continuous Rating Input (W)	Impact Energy (EPTA-Procedure 05/2009)	Net Weight	AVT	Soft No Load
HM1214C	SDS-MAX Shank	1,510	19.9	12.3 kg (27.1 lbs)	•	•
HM1213C	SDS-MAX Shank	1,510	18.6	10.8 kg (23.7 lbs)	•	•
HM0871C	SDS-MAX Shank	1,100	8.1	5.6 - 5.8 kg (12.4 - 12.8 lbs)	•	•
HM0870C	SDS-MAX Shank	1,100	7.6	5.1 - 5.3 kg (11.1 - 11.6 lbs)	-	-
HM1306	30 mm Hex Shank	1,510	21.7	15.1 kg (33.3 lbs)	-	-
HM1317C	30 mm Hex Shank	1,510	25	17.0 kg (37.5 lbs)	•	•
HM1501	30 mm Hex Shank	1,850	48.1	18.4 kg (40.6 lbs)	-	-
HM1201	21 mm Hex Shank	1,130	13.0*	9.1 kg (20.1 lbs)	-	-
HM0810TA	17 mm Hex Shank	900	7.2	6.3 kg (13.9 lbs)	-	-
M8600B	17 mm Hex Shank	900	7.2	5.4 kg (12 lbs)	-	-

*Our experimental conditions

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Screwing / Drilling

Stringing

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita
int

Combination/ Rotary Hammer Drill
Capability Chart

Adapted for SDS-PLUS bits Adapted for SDS-MAX bits Tungsten Carbide-tipped usable range Recommended range Core bits Optimal Possible

Capacity	Bit	Model	Battery	Impact energy according to EPTA05/2009: J	EPTA Weight (kg)	Drilling Ø Diamater																Material For Drilling			
						0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	Highly reinforced concrete	Concrete, granite, stone, brick	Metal/ wood
16 mm		HR166D	12Vmax	1.1 J	1.8 - 2.4																				

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Grinding Sanding Polishing



GA003GM201
RM 3,918

GA003GZ 100 mm (4")
RM 1,235

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Top Slide Switch

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
- GZ : Without Charger, Battery & Carrying Case



*Not applicable
for Z model

BL MOTOR XPT AFT

Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
Max Wheel Thickness	6.4 mm (1/4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	398 x 117 x 150 mm (15-5/8 x 4-5/8 x 5-7/8")
Net Weight	2.8 - 3.3 kg (6.2 - 7.3 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

GA011GM201
RM 3,978

GA011GZ 100 mm (4")
RM 1,296

Cordless Angle Grinder

40Vmax

*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Paddle Switch

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
- GZ : Without Charger, Battery & Carrying Case



*Not applicable
for Z model

BL MOTOR XPT AFT

Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
Max Wheel Thickness	6.4 mm (1/4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	398 x 117 x 150 mm (15-5/8 x 4-5/8 x 5-7/8")
Net Weight	2.8 - 3.4 kg (6.2 - 7.5 lbs)

GA021GZK 100 mm (4")
RM 1,378

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Top Slide Switch

4"



**WHILE
STOCK
LAST**

Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

- GZK : With Carrying Case, Without Charger & Battery



*Not applicable
for Z model

BL MOTOR XPT AFT AWS

Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
Max Wheel Thickness	6.4 mm (1/4")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	413 x 117 x 150 mm (16-1/4 x 4-5/8 x 5-7/8")
Net Weight	2.8 - 3.4 kg (6.2 - 7.5 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

GA027GM201
RM 4,137

GA027GZ 100 mm (4")
RM 1,460

Cordless Angle Grinder

40Vmax

*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Paddle Switch

4"



**WHILE
STOCK
LAST**

Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

- GM201: 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
- GZ : Without Charger, Battery & Carrying Case



*Not applicable
for Z model

BL MOTOR XPT AFT AWS

Wheel Diameter	100 mm (4")
Hole Diameter	16 mm (5/8")
Max Wheel Thickness	6.4 mm (1/4")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	413 x 117 x 150 mm (16-1/4 x 4-5/8 x 5-7/8")
Net Weight	2.9 - 3.4 kg (6.4 - 7.5 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
Power Tools

Grinding | Sanding | Polishing

Screwing /
Drilling

Striving

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
INTL

GA048GZ 100 mm (4")

RM 2,168

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Paddle Switch

4"



Standard Equipment:

Wheel Cover, Cutting Wheel Cover Attachment,
Vibration Proof Grip, Lock Nut Wrench 20,
Grinding Wheel 100X6X16 (A-80852)

* GZ: Without Charger & Battery



Wheel Diameter	100 mm (4")
Max Abrasive Wheel Thickness	6.4 mm (1/4")
Hole Diameter	16 mm (5/8")
Cutting Depth	21 mm (13/16")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	343 x 117 x 144 mm (13-1/2 x 4-5/8 x 5-5/8")
Net Weight	2.8 - 5.2 kg (6.2 - 11.5 lbs)
Work Amount (approx.)	8 cuts with BL4040, concrete cutting 20 mm depth x 600 mm width with Diamond Wheel

DGA411Z 100 mm (4")

RM 1,020

Cordless Angle Grinder

18V

Top Slide Switch
Convenient for
left & right handed

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

* Z: Without Charger & Battery



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	382 x 117 x 140 mm (15 x 4-5/8 x 5-1/2")
Net Weight	2.2 - 2.8 kg (4.8 - 6.1 lbs)
Continuous Usage Time (approx.)	8 min with BL1850B Metal Sanding Pressing load of 30N, 3000 RPM

DGA406Z 100 mm (4")

RM 978

Cordless Angle Grinder

18V

Top Slide Switch
Convenient for
left & right handed

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

* Z: Without Charger & Battery



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	362 x 117 x 146 mm (14-1/4 x 4-5/8 x 5-3/4")
Net Weight	2.18 - 2.77 kg (4.81 - 6.12 lbs)
Work Amount (approx.)	12 m with BL1850B Cutting Concrete Depth 10 mm

DGA404RTE | DGA404RFE | DGA404Z 100 mm (4")

RM 2,304

RM 1,968

RM 914

Cordless Angle Grinder

18V

Top Slide Switch
Convenient for
left & right handed



VIDEO CLIP
Models and specs
may vary by country



DGA404
DGA454
DGA504

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

- * RTE: 1x Rapid Charger, 2x 5.0Ah Battery
- * RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- * Z : Without Charger, Battery & Carrying Case



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	362 x 117 x 140 mm (14-1/4 x 4-5/8 x 5-1/2")
Net Weight	2.10 - 2.71 kg (4.63 - 5.98 lbs)
Work Amount (approx.)	12 m with BL1850B Cutting concrete depth 10 mm

DGA402RFE | DGA402Z 100 mm (4")

RM 1,612

RM 546

430 mm

Cordless Angle Grinder

18V

Top Slide Switch
Convenient for
left & right handed



4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

- * RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- * Z : Without Charger, Battery & Carrying Case



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	317 x 118 x 118 mm (12-1/2 x 4-5/8 x 4-5/8")
Net Weight	1.90 - 2.51 kg (4.19 - 5.5 lbs)
Work Amount (approx.)	13.5 m with BL1850B Cutting concrete depth 5 mm

DGA418Z 100 mm (4")
RM 1,556

Cordless Angle Grinder

18V



Paddle Switch

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

• Z: Without Charger & Battery



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	382 x 117 x 146 mm (15 x 4-5/8 x 5-3/4")
Net Weight	2.2 - 2.9 kg (5.0 - 6.3 lbs)
Continuous Usage Time (approx.)	8 min with BL1850B Metal sanding Pressing load of 30N, 3000 RPM

DGA408RME | DGA408RFE | DGA408Z 100 mm (4")
RM 2,275 | RM 2,090 | RM 1,040

Cordless Angle Grinder

18V



Paddle Switch

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Grip, Lock Nut Wrench

• RME: 1x Rapid Charger, 2x 4.0Ah Battery

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery

• Z: Without Charger, Battery & Carrying Case



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	362 x 117 x 146 mm (14-1/4 x 4-5/8 x 5-3/4")
Net Weight	2.18 - 2.80 kg (4.81 - 6.17 lbs)
Work Amount (approx.)	12 m with BL1850B Cutting concrete depth 10 mm

DGA405RFE | DGA405Z 100 mm (4")
RM 1,998 | RM 945

Cordless Angle Grinder

18V



Paddle Switch

4"



Standard Equipment:

Grinding Wheel (A-80852), Wheel Cover,
Side Handle, Lock Nut Wrench

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery

• Z: Without Charger, Battery & Carrying Case



Wheel Diameter	100 mm (4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	362 x 117 x 140 mm (14-1/4 x 4-5/8 x 5-1/2")
Net Weight	2.08 - 2.69 kg (4.59 - 5.94 lbs)
Work Amount (approx.)	12 m with BL1850B Cutting concrete depth 10mm

GA4040C 100 mm (4")
RM 757

Angle Grinder

• Super Joint System II developed
for effective vibration absorption.



WHILE STOCK LAST

Slide Switch

Standard Equipment:

Depressed Center Wheel (A-80852),
Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	1,400 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	2,800 - 11,000
Dimensions (L x W x H)	303 x 117 x 111 mm (11-7/8 x 4-5/8 x 4-3/8")
Net Weight	2.3 - 2.6 kg (5.1 - 5.7 lbs)
Power Supply Cord	2.5 m (8.2 ft)

9556HNG | 9556HPG 100 mm (4")
RM 345 | RM 364

Angle Grinder

• Powerful 840 W motor.



9556HNG

9556HPG

Slide Switch

Paddle Switch

Standard Equipment:

Depressed Center Wheel (A-80852),
Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	840 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	273 x 118 x 97 mm (10-3/4 x 4-5/8 x 3-13/16")
Net Weight	1.6 - 2.0 kg (3.6 - 4.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA4031 100 mm (4")
RM 306

Angle Grinder

• Toggle switch for easy operation.



Toggle Switch

Standard Equipment:

Depressed Center Wheel (A-80852),
Wheel Cover, Lock Nut Wrench



Continuous Rating Input	720 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	259 x 118 x 104 mm (10-1/4 x 4-5/8 x 4-1/8")
Net Weight	1.71 - 2.00 kg (3.77 - 4.41 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA4030 100 mm (4")
RM 310

Angle Grinder

• All ball bearing construction
for durability and longer tool life.



Slide Switch

Standard Equipment:

Depressed Center Wheel (A-80852),
Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	720 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	266 x 117 x 95 mm (10-1/2 x 4-5/8 x 3-3/4")
Net Weight	1.73 - 2.02 kg (3.81 - 4.45 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Grinding | Sanding | Polishing

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
-INT-

GA4034 100 mm (4")
RM 337

459 W

Angle Grinder
• *Machined bevel gears provide up to 2x longer service life.*

4"



Paddle Switch

Standard Equipment:
Depressed Center Wheel (A-80852),
Side Grip, Wheel Cover, Lock Nut Wrench




Continuous Rating Input	720 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	265 x 118 x 95 mm (10-3/8 x 4-5/8 x 3-3/4")
Net Weight	1.77 - 2.06 kg (3.90 - 4.54 lbs)
Power Supply Cord	2.5 m (8.2 ft)



GA055GZ 125 mm (5")
RM 2,000

**Cordless Flat-head
Angle Grinder**

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Top Slide Switch

5"



NEW

Standard Equipment:
Side Grip, Lock Nut Wrench,
Wheel Cover

• GZ: Without Charger & Battery



Wheel Diameter	125 mm (5")
Minimum Access Angle	39°
No Load Speed (RPM)	9,000
Dimensions (L x W x H)	483 x 140 x 136 mm (19 x 5-1/2 x 5-3/8")
Net Weight	3.1 - 4.6 kg (6.8 - 10.1 lbs)

GA005GM201 | GA005GZK | GA005GZ 125 mm (5")
RM 3,928 | RM 1,245 | RM 1,245

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Top Slide Switch

5"



WHILE STOCK LAST

Standard Equipment:
Grinding Wheel (A-80656), Wheel Cover,
Side Grip, Lock Nut Wrench

- GM201 : 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
- GZK : With Carrying Case, Without Charger & Battery
- GZ : Without Charger, Battery & Carrying Case



Wheel Diameter	125 mm (5")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	7.2 mm (9/32")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	398 x 140 x 156 mm (15-5/8 x 5-1/2 x 6-1/8")
Net Weight	2.9 - 3.6 kg (6.4 - 7.9 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

GA013GM201 | GA013GZK | GA013GZ 125 mm (5")
RM 4,006 | RM 1,326 | RM 1,326

Cordless Angle Grinder

40Vmax

VIDEO CLIP
Models and specs
may vary by country



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Paddle Switch

5"



WHILE STOCK LAST

Standard Equipment:
Grinding Wheel (A-80656),
Wheel Cover, Side Grip,
Lock Nut Wrench

- GM201 : 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
- GZK : With Carrying Case, Without Charger & Battery
- GZ : Without Charger, Battery & Carrying Case



Wheel Diameter	125 mm (5")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	7.2 mm (9/32")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	398 x 140 x 156 mm (15-5/8 x 5-1/2 x 6-1/8")
Net Weight	3.0 - 3.6 kg (6.6 - 7.9 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

GA023GZK | GA023GZ 125 mm (5")
RM 1,409 | RM 1,409

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Top Slide Switch

5"



WHILE STOCK LAST

Standard Equipment:
Grinding Wheel (A-80656), Wheel Cover,
Side Grip, Lock Nut Wrench

- GZK : With Carrying Case, Without Charger & Battery
- GZ : Without Charger, Battery & Carrying Case



Wheel Diameter	125 mm (5")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	7.2 mm (9/32")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	413 x 140 x 156 mm (16-1/4 x 5-1/2 x 6-1/8")
Net Weight	3.0 - 4.4 kg (6.6 - 9.7 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

* All recommended selling price (RSP) shown are for reference only (exclude SST).

GA029GZK | GA029GZ 125 mm (5")
RM 1,490 RM 1,490

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Paddle Switch

5"

WHILE STOCK LAST



Standard Equipment:

Grinding Wheel (A-80656), Wheel Cover,
Side Grip, Lock Nut Wrench

- GZK : With Carrying Case, Without Charger & Battery
- GZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model **BL MOTOR XPT AFT AWS**

Wheel Diameter	125 mm (5")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	7.2mm (9/32")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	413 x 140 x 156 mm (16-1/4 x 5-1/2 x 6-1/8")
Net Weight	3.0 - 4.5 kg (6.6 - 9.9 lbs)
Work Amount (approx.)	12 cuts with BL4040 Concrete plate cutting 600 mm wide & 20 mm depth with Diamond Wheel

DGA518Z 125 mm (5")
RM 1,596

Cordless Angle Grinder

18V



Paddle Switch

5"



Standard Equipment:

Grinding Wheel (A-80656), Wheel Cover,
Side Grip, Lock Nut Wrench

- Z : Without Charger & Battery



BL MOTOR XPT ADT AFT AWS

Wheel Diameter	125 mm (5")
No Load Speed (RPM)	3,000 - 8,500
Dimensions (L x W x H)	382 x 140 x 151 mm (15 x 5-1/2 x 6")
Net Weight	2.4 - 3.1 kg (5.3 - 6.8 lbs)
Work Amount (approx.)	13.8 m with BL1850B Cutting concrete depth 10 mm

DGA508Z 125 mm (5")
RM 1,082

Cordless Angle Grinder

18V



Paddle Switch

5"



Standard Equipment:

Grinding Wheel (A-80656), Wheel Cover,
Side Handle, Lock Nut Wrench

- Z : Without Charger & Battery



BL MOTOR XPT ADT AFT

Wheel Diameter	125 mm (5")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	362 x 140 x 151 mm (14-1/4 x 5-1/2 x 5-15/16")
Net weight	2.35 - 3.83 kg (5.18 - 8.45 lbs)
Work Amount (approx.)	13.8 m with BL1850B Cutting concrete depth 10 mm

DGA505Z 125 mm (5")
RM 989

Cordless Angle Grinder

18V



Paddle Switch

5"



Standard Equipment:

Grinding Wheel (A-80656), Wheel Cover,
Side Handle, Lock Nut Wrench

- Z : Without Charger, Battery & Carrying Case



BL MOTOR XPT ADT AFT

Wheel Diameter	125 mm (5")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	362 x 140 x 145 mm (14-1/4 x 5-1/2 x 5-3/4")
Net weight	2.26 - 3.73 kg (4.98 - 8.23 lbs)
Work Amount (approx.)	13.8 m with BL1850B Cutting concrete depth 10 mm

GA5091X02 125 mm (5")
RM 1,435

Angle Grinder

• Easy-to-hold barrel grip housing.

5"



Continuous Rating Input	1,900 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	2,800 - 11,500
Dimensions (L x W x H)	349 x 140 x 129 mm (13-3/4 x 5-1/2 x 5-1/8")
Net Weight	2.8 - 4.0 kg (6.2 - 8.8 lbs)

Standard Equipment:

Wheel Cover with Clip
on Cutting Wheel Guard
Attachment, Side Grip,
Lock Nut Wrench 35

Slide Switch



AFT



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
Power Tools

Grinding | Sanding | Polishing

Screwing / Drilling

Stringing

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

GA5092X02 125 mm (5")

RM 1,217

264

Angle Grinder
• *Easy-to-hold barrel grip housing.*

5"



Standard Equipment:
Wheel Cover with Clip on Cutting Wheel Guard Attachment, Side Grip, Lock Nut Wrench 35

Slide Switch



Continuous Rating Input	1,900 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,500
Dimensions (L x W x H)	326 x 140 x 123 mm (12-7/8 x 5-1/2 x 4-7/8")
Net Weight	2.6 - 5.7 kg (5.7 - 8.4 lbs)

GA5020 125 mm (5")

RM 578

303

Angle Grinder
• *SJS Mechanical clutch system helps prevent motor and gear damage.*

5"



Standard Equipment:
Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench



Trigger Switch

Continuous Rating Input	1,050 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	356 x 139 x 120 mm (14 x 5-1/2 x 4-3/4")
Net Weight	2.7 - 3.9 kg (6.0 - 8.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA5010 125 mm (5")

RM 525

303

Angle Grinder
• *Powerful 1,050 W motor.*

5"



Standard Equipment:
Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench



Trigger Switch

Continuous Rating Input	1,050 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	356 x 139 x 112 mm (14 x 5-1/2 x 4-3/8")
Net Weight	2.6 - 3.8 kg (5.8 - 8.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA5030 125 mm (5")

RM 326

459

Angle Grinder
• *Machined bevel gears provide up to 2x longer service life.*

5"



Standard Equipment:
Depressed Center Wheel (A-80656), Side Grip, Wheel Cover, Lock Nut Wrench



Slide Switch

Continuous Rating Input	720 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	266 x 138 x 103 mm (10-1/2 x 5-7/16 x 4-1/16")
Net Weight	1.92 - 3.07 kg (4.23 - 6.77 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA035GZ 150 mm (6")

RM 1,275

Cordless Angle Grinder

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah
Top Slide Switch

6"



Standard Equipment:
Grinding Wheel (A-80846), Toolless Wheel Cover, Side Grip, Lock Nut Wrench

* GZ: Without Charger & Battery



VIDEO CLIP
Models and specs may vary by country
GA035G
GA036G

GA5095 125 mm (5")

RM 1,046

264

Angle Grinder
• *Improved power consumption.*

5"



Standard Equipment:
Depressed center wheel, Side grip, Wheel cover, Lock nut wrench, Lock nut, Inner flange

Paddle Switch



Continuous Rating Input	1,900 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,500
Dimensions (L x W x H)	326 x 140 x 123 mm (12-7/8 x 5-1/2 x 4-7/8")
Net Weight	2.6 - 3.8 kg (5.7 - 8.4 lbs)

GA5040 125 mm (5")

RM 631

325

Angle Grinder
• *Connectable to Makita vacuum cleaner with optional dust collecting wheel guard.*

5"



Standard Equipment:
Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Slide Switch



Continuous Rating Input	1,100 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	303 x 140 x 116 mm (11-7/8 x 5-1/2 x 4-9/16")
Net Weight	2.4 - 3.5 kg (5.2 - 7.8 lbs)
Power Supply Cord	2.5 m (8.2 ft)

9558HPG 125 mm (5")

RM 389

325

Angle Grinder

5"



Standard Equipment:
Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

Paddle Switch



Continuous Rating Input	840 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	271 x 139 x 106 mm (10-5/8 x 5-1/2 x 4-3/16")
Net Weight	1.7 - 3.2 kg (3.8 - 6.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)



Wheel Diameter	150 mm (6")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	6.4 mm (1/4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	398 x 171 x 156 mm (15-5/8 x 6-3/4 x 6-1/8")
Net Weight	3.0 - 4.0 kg (6.6 - 8.8 lbs)
Work Amount (approx.)	3.0 m with BL4040 Concrete plate cutting 600 mm wide & 30 mm depth with Diamond Wheel

GA036GZ 150 mm (6")

RM 1,359

Cordless Angle Grinder**40Vmax**

VIDEO CLIP

Models and specs may vary by country

GA035G
GA036G*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah**Paddle Switch****6"****Standard Equipment:**Grinding Wheel (A-80846),
Toolless Wheel Cover, Side Grip,
Lock Nut Wrench

• GZ: Without Charger & Battery



Wheel Diameter	150 mm (6")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	6.4 mm (1/4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	398 x 171 x 156 mm (15-5/8 x 6-3/4 x 6-1/8")
Net Weight	3.0 - 4.0 kg (6.6 - 8.8 lbs)
Work Amount (approx.)	3.0 m with BL4040 Concrete plate cutting 600 mm wide & 30 mm depth with Diamond Wheel

GA6010 150 mm (6")

RM 546

303**Angle Grinder**• **Powerful 1,050 W motor.****6"****Trigger Switch****Standard Equipment:**Depressed Center Wheel (A-80846),
Side Grip, Wheel Cover, Lock Nut Wrench

Continuous Rating Input	1,050 W
Wheel Diameter	150 mm (6")
No Load Speed (RPM)	10,000
Dimensions (L x W x H)	356 x 169 x 112 mm (14 x 6-5/8 x 4-3/8")
Net Weight	2.7 - 3.1 kg (5.9 - 6.9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

**GA037GZK**

RM 1,623

GA037GZ

RM 1,623

Cordless Angle Grinder**40Vmax***Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah**Large Trigger Switch****7"****WHILE STOCK LAST****Standard Equipment:**

Toolless Wheel Cover, Side Grip, Lock Nut Wrench

• GZK : With Carrying Case, Without Charger & Battery

• GZ : Without Charger & Battery



Wheel Diameter	180 mm (7")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	7.2 mm (1/4")
No Load Speed (RPM)	7,800
Dimensions (L x W x H)	499 x 200 x 180 mm (19-5/8 x 7-7/8 x 7-1/8")
Net Weight	4.4 - 5.2 kg (9.7 - 11.0 lbs)
Work Amount (approx.)	8.0 m with BL4050F Concrete cutting 30 mm depth with Diamond Wheel

GA7070 180 mm (7")

RM 1,321

224**Angle Grinder**• **Motor more durable for heavy duty applications.****7"****Trigger Switch****Standard Equipment:**Anti-Vibration Grip, Wheel Cover,
Lock Nut Wrench

Continuous Rating Input	2,800 W
Wheel Diameter	180 mm (7")
Wheel Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	7.2 mm (1/4")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	506 x 200 x 146 mm (20 x 7-7/8 x 5-3/4")
Net Weight	6.1 - 6.6 kg (13.5 - 14.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA7082 180 mm (7")

RM 790

224**Angle Grinder**• **Motor more durable for heavy duty applications.****7"****Large Trigger Switch****Standard Equipment:**

Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	2,700 W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	499 x 200 x 144 mm (19-5/8 x 7-7/8 x 5-5/8")
Net Weight	6.0 kg (13.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA7090 180 mm (7")

RM 676

Angle Grinder• **Continuous rating input: 2,200 W, targeting metal grinding operations with light weight & compact design.****7"****Large Trigger Switch****Standard Equipment:**

Side Grip, Lock Nut Wrench



Continuous Rating Input	2,200 W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	438 x 200 x 144 mm (17-1/4 x 7-7/8 x 5-5/8")
Net Weight	5.1 - 7.3 kg (11.2 - 16.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

GA7020 180 mm (7")

RM 735

204**Angle Grinder**• **Powerful 2,200 W motor for faster material removal.****7"****Trigger Switch****Standard Equipment:**

Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	2,200 W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	473 x 200 x 140 mm (18-5/8 x 7-7/8 x 5-1/2")
Net Weight	5.56 - 6.06 kg (12.26 - 13.36 lbs)
Power Supply Cord	2.5 m (8.2 ft)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Grinding | Sanding | Polishing

GA7050 180 mm (7")

RM 704

204

Angle Grinder

• Most compact in its class.

7"



Trigger Switch

Standard Equipment:

Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	2,000 W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	432 x 200 x 132 mm (17 x 7-7/8 x 5-3/16")
Net Weight	3.98 - 5.00 kg (8.8 - 11.0 lbs)
Power Supply Cord	2.5 m (8.2 ft)



GA038GZK | GA038GZ 230 mm (9")

RM 1,643

RM 1,643

Cordless Angle Grinder

40Vmax

9"



Large Trigger Switch

WHILE STOCK LAST

Standard Equipment:

Toolless Wheel Cover, Side Grip, Lock Nut Wrench

• GZK : With Carrying Case, Without Charger & Battery

• GZ : Without Charger & Battery



*Not applicable for Z model



Wheel Diameter	230 mm (9")
Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	6.5 mm (1/4")
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	509 x 250 x 164 mm (20 x 9-7/8 x 6-1/2")
Net Weight	4.6 - 7.4 kg (10.1 - 16.3 lbs)
Work Amount (approx.)	5.0 m with BL4050F Concrete cutting 30 mm depth with Diamond Wheel

GA9070 230 mm (9")

RM 1,460

224

Angle Grinder

• Motor more durable for heavy duty applications.

9"



Trigger Switch

Standard Equipment:

Anti-Vibration Grip, Wheel Cover, Lock Nut Wrench



AFT

Continuous Rating Input	2,800 W
Wheel Diameter	230 mm (9")
Wheel Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	6.5 mm (1/4")
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	506 x 250 x 146 mm (20 x 9-7/8 x 5-3/4")
Net Weight	6.3 - 8.5 kg (13.9 - 18.7 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA9082 230 mm (9")

RM 790

224

Angle Grinder

• Motor more durable for heavy duty applications.

9"



Large Trigger Switch

Standard Equipment:

Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	2,700 W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	499 x 250 x 144 mm (19-5/8 x 9-7/8 x 5-5/8")
Net Weight	6.1 kg (13.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA9090 230 mm (9")

RM 687

204

Angle Grinder

• Continuous rating input: 2,200 W, targeting metal grinding operations with light weight & compact design.

9"



Large Trigger Switch

Standard Equipment:

Side Grip, Lock Nut Wrench



Continuous Rating Input	2,200 W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	438 x 250 x 144 mm (17-1/4 x 9-7/8 x 5-5/8")
Net Weight	5.3 - 7.4 kg (11.7 - 16.3 lbs)
Power Supply Cord	2.0 m (6.6 ft)

GA9020 230 mm (9")

RM 746

204

Angle Grinder

• Spiral bevel gears more efficient transfer of energy.

9"



Trigger Switch

Standard Equipment:

Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	2,200 W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,000
Dimensions (L x W x H)	473 x 249 x 140 mm (18-5/8"x9-3/4"x5-1/2")
Net Weight	5.76 - 8.05 kg (12.7 - 17.8 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GA9050 230 mm (9")

RM 715

204

Angle Grinder

• Compact gear housing increases maximum cutting depth by 4 mm.

9"



Trigger Switch

Standard Equipment:

Side Grip, Wheel Cover, Lock Nut Wrench



Continuous Rating Input	2,000 W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Dimensions (L x W x H)	432 x 250 x 132 mm (17 x 9-7/8 x 5-3/16")
Net Weight	4.64 - 6.94 kg (10.2 - 15.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

40Vmax Cordless Angle Grinder

Model No.			No Load Speed (RPM)	Switch							Anti-restart function	
100 mm	125 mm	150 mm										
GA003G	GA005G	GA035G	8,500	Slide	●	●	●		●		●	
GA011G	GA013G	GA036G	8,500	Paddle	●	●	●		●		●	
GA021G	GA023G	-	3,000 - 8,500	Slide	●	●	●		●	●	●	
GA027G	GA029G	-	3,000 - 8,500	Paddle	●	●	●		●	●	●	
-	GA044G	-	3,000 - 8,500	Paddle	●	●	●		●	●	●	●
-	GA055G	-	9,000	Slide	●	●	●		●		●	
GA048G	-	-	11,000	Paddle	●	●	●		●		●	
180 mm	230 mm											
GA037G	-	-	7,800	Large Trigger	●	●	●		●	●	●	
-	GA038G	-	6,600	Large Trigger	●	●	●		●	●	●	

18V Cordless Angle Grinder

Model No.		No Load Speed (RPM)	Switch							Anti-restart function	
100 mm	125 mm										
DGA411	-	3,000 - 8,500	Slide	●	●	●	●			●	
DGA406	-	8,500	Slide	●	●	●	●	●		●	
DGA404	-	8,500	Slide	●	●	●	●			●	
DGA402	-	11,000	Slide							●	
DGA419	-	3,000 - 8,500	Paddle	●	●	●	●	●		●	●
DGA418	DGA518	3,000 - 8,500	Paddle	●	●	●	●	●	●	●	
DGA405	DGA505	8,500	Paddle	●	●	●	●			●	
DGA408	DGA508	8,500	Paddle	●	●	●	●	●		●	

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Grinding | Sanding | Polishing

Angle Grinder (100mm, 115mm, 125mm, 150mm)

Model No.				Continuous Rating Input (W)	Switch	SJS / SJS2	Variable Speed	Constant Speed			Soft Start	Anti-restart function	
100 mm	115 mm	125 mm	150 mm										
-	-	GA5091X02	-	1,900	Slide	SJS2	●	●	●	●	●	●	
-	-	GA5092X02	-	1,900	Slide	SJS2		●	●		●	●	
-	-	GA5095	-	1,900	Paddle	SJS2		●	●		●	●	
GA4040C	GA4541C	GA5041C	-	1,400	Slide	SJS2	●	●			●	●	
-	-	GA5040	-	1,100	Slide	SJS2							
-	-	GA5020	-	1,050	Trigger	SJS							
-	-	GA5010	GA6010	1,050	Trigger	-							
9556HNG	-	-	-	840	Slide	-							
9556HPG	-	9558HPG	-	840	Paddle	-							
GA4031	-	-	-	720	Toggle	-							
GA4030	-	GA5030	-	720	Slide	-							
GA4034	-	-	-	720	Paddle	-							

Angle Grinder (180mm, 230mm)

Model No.		Continuous Rating Input (W)	Switch	SJS / SJS2	Torque Limiter	Constant Speed	<i>AFT</i>		Soft Start	Anti-restart function	
180 mm	230 mm										
GA7070	GA9070	2,800	Large Trigger	-	●	●	●	●	●	●	
GA7082	GA9082	2,700	Large Trigger	-	●						
GA7020	GA9020	2,200	Large Trigger	-							
GA7090	GA9090	2,200	Large Trigger	-							
GA7050	GA9050	2,000	Large Trigger	-							

* All recommended selling price (RSP) shown are for reference only (exclude SST).

GV7000C 180 mm (7")

RM 1,312

303

Disc Sander

• *Motor-over-pad design for better balance and control.*

**Standard Equipment:**

Abrasive Disc, Rubber Pad, Lock Nut Wrench, Wrench, Side Grip



Continuous Rating Input	900 W
Abrasive Disc Size	180 mm (7")
Capacity	Pad: 180 mm (7")
No Load Speed (RPM)	2,500 - 4,700
Overall Length	210 mm (8-1/4")
Net Weight	2.1 kg (4.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

**PV001GZ**

RM 2,346

Cordless Polisher**40Vmax**

*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

**Standard Equipment:**

Loop Handle (413F67-9), Side Handle (158237-4), Hex Wrench, Wool Pad 180 (192629-7), Sleeve 18 (262542-4), Backing Pad (743053-3), Dust Cover

• GZ : Without Charger & Battery



BL MOTOR XPT

Brush Pad Capacity	180 mm (7")
Pad Diameter	165 mm (6-1/2")
Spindle Thread Size	M14
No Load Speed (RPM)	By Trigger: 0 - 2,200 By Dial: 600 - 2,200
Dimensions (L x W x H)	516 x 196 x 195 mm (20-1/4 x 7-3/4 x 7-5/8")
Net Weight	3.0 - 4.4 kg (6.6 - 9.7 lbs)
Continuous Usage Time (approx.)	42 min with BL4025 with load of 3.5 - 4.0 kg at 600 min ⁻¹

9237C 180 mm (7")

RM 1,429

303

Polisher

• *Fast and powerful for clear coat finishes.*



Continuous Rating Input	1,200 W
Capacity	Wool Pad: 180 mm (7") Wool Bonnet: 180 mm (7")
No Load Speed (RPM)	0 - 3,200
Dimensions (L x W x H)	431 x 198 x 187 mm (17 x 7-3/4 x 7-3/8")
Net Weight	3.2 - 3.4 kg (7.0 - 7.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:

Side Handle, Hex Wrench, Wool Pad

**DPV300Z**

RM 1,451

Cordless Sander Polisher**18V**

VIDEO CLIP
Models and specs
may vary by country



DPV300

**Standard Equipment:**

Side Grip, Pad, Adapter, Wool Pad, Sponge Pad

• Z: Without Charger & Battery



BL MOTOR XPT

Pad / Disc Diameter	Hook & Loop Style: 80 mm (3-1/8") Twist-On / Twist-Off Style: 50 mm (2")
Backing Pad Diameter	Hook & Loop Style: 75 mm (2-15/16") Twist-On / Twist-Off Style: 46 mm (1-13/16")
Head Length	127 mm (5")
No Load Speed (RPM)	Polishing: 0 - 2,800 Sanding: 0 - 9,500
Dimensions (L x W x H)	160 x 79 x 256 mm (6-5/16 x 3-1/8 x 10-1/8")
Net Weight	2.0 - 2.6 kg (4.4 - 5.7 lbs)
Continuous Usage Time (approx.)	34 min with BL1850B car body polishing (low speed) 21 min with BL1850B sanding SPF timber (high speed) with grit 80 abrasive paper

PW5001C 125 mm (5")

RM 2,415

318

Stone Polisher

• *Variable speed control dial enables user to match the speed to the application.*

**Standard Equipment:**

Rubber Pad, Side Grip, Wrench, Head Cover



Continuous Rating Input	900 W
Capacity	Pad: 100-125 mm (4-5")
No Load Speed (RPM)	2,000 - 4,000
Overall Length	359 mm (14-1/8")
Net Weight	2.3 - 2.6 kg (5.1 - 5.7 lbs)
Power Supply Cord	4.0 m (13.1 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer / Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Grinding | Sanding | Polishing

GD001G | GD002G
Cordless Die Grinder

Speed adjustment dial enables adjustment of the rotation speed to suit the application.

- **High rotation speed:** Deburring, grinding
- **Low rotation speed:** Finish polishing, Removal of paint and rust



Dial	No Load Speed (min ⁻¹)	Application
1	7,000	Polishing and finishing
2	12,500	Paint removal
3	18,000	Rust removal
4	23,500	Burr removal
5	29,000	Grinding



GD001G
Slide-switch



GD002G
Paddle switch



Shaft lock
The spindle can be locked with the button for accessory removal/ installation.

Slim grip
146 mm circumference



3 LEDs
Enhances visibility in tight spaces

GD001GZ
RM 1,375

Cordless Die Grinder

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Top Slide Switch



Standard Equipment:
Wrench, Collet Cone 6 mm

• GZ: Without Charger & Battery



Max Collet Size	8 mm (5/16")
Max Wheel Diameter	Wheel Points : 32 mm (1-1/4") Cut-off wheel : 52 mm (2-1/16")
No Load Speed (RPM)	7,000 - 29,000
Dimensions (L x W x H)	452 x 85 x 119 mm (17-3/4 x 3-3/8 x 4-11/16")
Net Weight	2.2 - 3.4 kg (4.9 - 7.5 lbs)
Continuous Usage Time (approx.)	15 min with BL4025 Grinding with Wheel Point at Max speed

GD002GZ
RM 1,296

Cordless Die Grinder

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah

Paddle Switch



Standard Equipment:
Wrench, Collet Cone 6 mm

• GZ: Without Charger & Battery




Max Collet Size	8 mm (5/16")
Max Wheel Diameter	Wheel Points : 32 mm (1-1/4") Cut-off wheel : 52 mm (2-1/16")
No Load Speed (RPM)	7,000 - 29,000
Dimensions (L x W x H)	452 x 85 x 119 mm (17-3/4 x 3-3/8 x 4-11/16")
Net Weight	2.2 - 3.4 kg (4.9 - 7.5 lbs)
Continuous Usage Time (approx.)	15 min with BL4025 Grinding with Wheel Point at Max speed

DGD800Z
RM 600

Cordless Die Grinder

18V



430 mm



Standard Equipment:
Wrench x2

• Z: Without Charger & Battery


Capacity	Collet : 6 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	26,000
Dimensions (L x W x H)	402 x 82 x 118 mm (15-3/4 x 3-1/4 x 4-5/8")
Net Weight	1.7 - 2.2 kg (3.8 - 4.9 lbs)
Work Amount (approx.)	9.0 g with BL1850B Grinding steel plate SS400

DGD801Z

RM 600

Cordless Die Grinder

18V



Standard Equipment:

Wrench x2

• Z: Without Charger & Battery

Capacity	Collet : 6 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	25,000
Dimensions (L x W x H)	307 x 82 x 118 mm (12-1/8 x 3-1/4 x 4-5/8")
Net Weight	1.5 - 2.0 kg (3.3 - 4.3 lbs)
Work Amount (approx.)	9.5 g with BL1850B Grinding steel plate SS400

GD0800C 6 mm

RM 1,492

Die Grinder

• Electronic controller for operator convenience.



Standard Equipment:

Wrench x2



Continuous Rating Input	750 W
Capacity	Collet: 6 mm
Wheel Diameter	25 mm (1")
No Load Speed (RPM)	7,000 - 28,000
Dimensions (L x W x H)	371 x 75 x 75 mm (14-5/8 x 2-15/16 x 2-15/16")
Net Weight	1.88 kg (4.14 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GD0801C 6 mm

RM 1,514

Die Grinder

• Powerful 750 W motor for faster material removal.



Standard Equipment:

Side Handle, Wrench x2



Continuous Rating Input	750 W
Capacity	Collet: 6 mm
Max Wheel Diameter	25 mm (1")
No Load Speed (RPM)	7,000 - 29,000
Dimensions (L x W x H)	390 x 75 x 88 mm (15-3/8 x 2-15/16 x 3-1/2")
Net Weight	1.96 - 1.97 kg (4.32 - 4.34 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GD0600 6 mm

RM 484

Die Grinder

• Large flush-mount paddle switch for comfortable operation.



Standard Equipment:

Wrench x2



Continuous Rating Input	400 W
Capacity	Collet: 6 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	25,000
Dimensions (L x W x H)	358 x 82 x 82 mm (14-1/8 x 3-1/4 x 3-1/4")
Net Weight	1.71 - 1.87 kg (3.77 - 4.12 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GD0601 6 mm

RM 473

Die Grinder

• Powerful 400 W motor.



Standard Equipment:

Wrench x2



Continuous Rating Input	400 W
Capacity	Collet: 6 mm
Wheel Diameter	38 mm (1-1/2")
No Load Speed (RPM)	25,000
Dimensions (L x W x H)	359 x 82 x 82 mm (14-1/8 x 3-1/4 x 3-1/4")
Net Weight	1.68 - 1.84 kg (3.70 - 4.06 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GD0603 6 mm

RM 357

Die Grinder

• Compact and easy handling.



Standard Equipment:

Spanner, Wheel Points



Continuous Rating Input	240 W
Capacity	Collet: 6 mm
Max Wheel Diameter	19 mm (3/4")
No Load Speed (RPM)	28,000
Diameter of Grip	65 mm
Dimensions (L x W x H)	289 x 64 x 67 mm (11-3/8 x 2-1/2 x 2-5/8")
Net Weight	0.98 kg (2.16 lbs)
Power Supply Cord	2.5 m (8.2 ft)

GS5000 125 mm (5")

RM 1,701

Straight Grinder

• Powerful 750 W motor.



Standard Equipment:

Hex Wrench, Wrench



Continuous Rating	750 W
Wheel Diameter	125 mm (5")
Hole Diameter	12.7, 20 mm (1/2, 13/16")
No Load Speed (RPM)	5,600
Dimensions (L x W x H)	590 x 189 x 116 mm (23-1/4 x 7-7/16 x 4-9/16")
Net Weight	5.0 - 5.2 kg (11.0 - 11.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)



Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Grinding | Sanding | Polishing

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Speciality
Tools

Accessory

Makita
-int-

GB801 205 mm (8")
RM 1,312

Bench Grinder
• Adjustable wheel balance feature reduces vibration.



Standard Equipment:
Safety Eye Shield, Protection Glasses,
Wrench x2



Continuous Rating Input	550 W
Wheel Diameter	205 mm (8")
Wheel Width	19 mm (3/4")
Hole Dia.	15.88 mm (5/8")
H.P.	3/4
No Load Speed (RPM)	2,850 (50 Hz)/ 3,450 (60 Hz)
Dimensions (L x W x H)	395 x 265 x 333 mm (15-9/16 x 10-7/16 x 13-7/64")
Net Weight	19.91 - 19.63 kg (43.89 - 43.28 lbs)

GB602 150 mm (6")
RM 787

Bench Grinder
• Wheel covers have built-in task lights.



Standard Equipment:
Safety Eye Shield, Protection Glasses,
Wrench x2



Continuous Rating Input	250 W
Wheel Diameter	150 mm (6")
Wheel Width	16 mm (5/8")
Hole Dia.	12.7 mm (1/2")
H.P.	1/3
No Load Speed (RPM)	2,850 (50 Hz)/ 3,450 (60 Hz)
Dimensions (L x W x H)	375 x 205 x 286 mm (14-49/64 x 8 x 11-17/64")
Net Weight	9.31 - 9.08 kg (20.02 - 20.52 lbs)

DPO600Z 150 mm (6")
RM 2,310

Cordless Random Orbit Polisher

18V



Standard Equipment:
Hex Wrench

• Z: Without Charger & Battery



Pad Size	150 mm (6")
Orbits Per Minute (OPM)	Normal mode: 0 - 6,800 Finishing mode: 0 - 5,200
Strokes Per Minute (SPM)	Normal mode: 0 - 13,600 Finishing mode: 0 - 10,400
No Load Speed (RPM)	Normal mode: 0 - 780 Finishing mode: 0 - 600
Orbit Diameter	5.5 mm (7/32")
Dimensions (L x W x H)	530 x 148 x 126 mm (20-7/8 x 5-7/8 x 5")
Net Weight	3.1 - 3.6 kg (6.8 - 7.9 lbs)
Continuous Usage Time (approx.)	30 min with BL1860B Finishing mode

PO5000C 125 mm (5")
RM 1,837

Random Orbit Polisher



Standard Equipment:
Hex Wrench



Continuous Rating	900 W
Pad Size	125 mm (5")
Orbits Per Minute (OPM)	0 - 6,800
Strokes Per Minute (SPM)	0 - 13,600
No Load Speed (RPM)	0 - 780
Orbit Diameter	5.5 mm (7/32")
Dimensions (L x W x H)	451 x 123 x 134 mm (17-3/4 x 4-7/8 x 5-1/4")
Net Weight	2.8 - 3.0 kg (6.2 - 6.5 lbs)
Power Supply Cord	4.0 m (13.1 ft)

BO6050J 150 mm (6")
RM 2,343

Random Orbit Sander



Standard Equipment:
Abrasive Paper, Side Grip



Continuous Rating Input	750 W
Pad Diameter	150 mm (6")
Orbits Per Minute (OPM)	1,600 - 6,800
Sanding Strokes Per Minute (SPM)	3,200 - 13,600
Pad Speed in Roto-orbit Mode (RPM)	140 - 600
Orbit Diameter	5.5 mm (7/32")
Dimensions (L x W x H)	330 x 155 x 145 mm (13 x 6-1/8 x 5-3/4")
Net Weight	2.6 kg (5.7 lbs)
Power Supply Cord	2.5 m (8.2 ft)

BO001CGZ | **BO003CGZ** 125 mm (5")
RM 1,754 | RM 1,754

Battery Powered Random Orbit Sander

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Dust Bag, Abrasive Disc, Pad Saver Disc,
Battery Adapter Set, Arm Band Complete,
Front Cuff

• GZ: Without Charger & Battery



Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	6,000 - 10,000
Orbit Diameter	BO001CG Ø 5.0 mm (3/16") BO003CG Ø 3.0 mm (1/8")
Dimensions (L x W x H)	234 x 123 x 96 mm (9-1/8 x 4-7/8 x 3-3/4")
Net Weight	0.92 kg (2.0 lbs)
Continuous Usage Time (approx.)	BO001CG 35 min with BL4040 sanding SPF plate at max rotation speed with net sanding sheet gnt #120 BO003CG 42 min with BL4040 sanding SPF plate at max rotation speed with net sanding sheet grit #120

DBO180Z 125 mm (5")
RM 757

Cordless Random Orbit Sander

18V



Standard Equipment:
Abrasive Paper, Dust Bag

• Z: Without Charger & Battery



Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	7,000 9,500 11,000
Dimensions (L x W x H)	175 x 123 x 153 mm (6-7/8 x 4-7/8 x 6")
Net Weight	1.4 - 1.7 kg (3.0 - 3.7 lbs)
Continuous Usage Time (approx.)	66 min with BL1850B Low Speed Sanding

BO5041 125 mm (5")
RM 820

Random Orbit Sander
• More power for faster sanding and a smooth finish.



Standard Equipment:
Abrasive Paper, Dust Bag



Continuous Rating Input	300 W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	4,000 - 12,000
Dimensions (L x W x H)	218 x 123 x 153 mm (8-5/8 x 4-7/8 x 6")
Net Weight	1.4 kg (3.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

BO5031 125 mm (5")
RM 704

Random Orbit Sander
• Smooth finish with variable speed control.



Standard Equipment:
Abrasive Paper, Dust Bag



Continuous Rating Input	300 W
Pad Diameter	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	4,000 - 12,000
Dimensions (L x W x H)	153 x 123 x 153 mm (6 x 4-7/8 x 6")
Net Weight	1.3 kg (3 lbs)
Power Supply Cord	2.0 m (6.6 ft)

BO005CGZ | **BO006CGZ**
RM 1,754

Battery Powered Orbital Sander

40Vmax


Standard Equipment:
Dust Bag, Abrasive Paper, Pad Saver, Battery Adapter Set, Arm Band Complete, Pad Protector, Front Cuff

• GZ: Without Charger & Battery



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

BO005CGZ



BO006CGZ



Abrasive Paper Size	Square: 80 x 130 mm (3-1/8 x 5-1/8") Triangular: 100 x 150 mm (3-15/16 x 5-7/8")
Orbits Per Minute (OPM)	6,000 - 10,000
Orbit Diameter	Ø 3.0 mm (1/8")
Dimensions (L x W x H)	BO005CG 236 x 80 x 99 mm (9-1/4 x 3-1/8 x 3-7/8") BO006CG 263 x 100 x 99 mm (10-3/8 x 3-15/16 x 3-7/8")
Net Weight	0.93 kg (2.1 lbs)
Continuous Usage Time (approx.)	65 min with BL4040 sanding SPF plate at max rotation speed with net sanding sheet gnt #120

BO007CGZ 93 x 185 mm
RM 1,754

Battery Powered Orbital Sander

40Vmax

Standard Equipment:
Dust Bag, Abrasive Paper, Pad Saver, Battery Adapter, Arm Band, Punch Plate, Front Cuff, Tool Hanger

• GZ: Without Charger & Battery



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

NEW



Orbit Diameter	2.0 mm (1/16")
Orbits Per Minute (OPM)	6,000 - 12,000
Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Dimensions (L x W x H)	263 x 92 x 106 mm (10-3/8 x 3-5/8 x 4-3/16")
Net Weight	1.1 kg (2.4 lbs)
Continuous Usage Time (approx.)	36 min with BL4025 sanding SPF plate at max rotation speed with net brasive paper grit #120



Screwing / Drilling
Stirring
Hammer Drilling / Chiselling
Grinding / Sanding / Polishing
Cutting
Sawing
Milling / Planing
Fastening / Fixing
Cleaning
Lawn Care / Grass Care
Tree Care / Hedge Care
Transportation
Lights
Comfort / Lifestyle
Specialty Tools
Accessory



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Grinding | Sanding | Polishing

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
-INT-

DBO481Z

RM 682

Cordless Finishing Sander

18V



Standard Equipment:
Abrasive Paper, Dust Box Assembly (135246-0),
Punch Plate (450066-4), Paper Dust Bag

• Z: Without Charger & Battery



Pad Size	112 x 102mm (4-3/8 x 4")
Abrasive Paper Size	Clamp type: 140 x 114 mm (5-1/2 x 4-1/2")
Compatible Hook & Loop Paper Size (with optional accessory)	Square: 114 x 102 mm (4-1/2 x 4") Rectangular: 114 x 190 mm (4-1/2 x 7-1/2") Triangular: 96 x 96mm (3-3/4x3-3/4")
Orbits Per Minute (OPM)	High: 14,000 Low: 11,000
Strokes Per Minute (SPM)	High: 28,000 Low: 22,000
Orbit Diameter	1.5 mm (1/16")
Dimensions (L x W x H)	171 x 112 x 151 mm (6-3/4 x 4-3/8 x 5-15/16")
Net Weight	1.4 - 1.7 kg (3.1 - 3.8 lbs)
Continuous Usage Time (approx.)	60 min with BL1860B Sanding SPF Plate with pressing load of 3N at high speed mode

DBO380Z

RM 809

Cordless Finishing Sander

18V



Standard Equipment:
Dust Box, Punch Plate, Abrasive Paper
Grit 120 x1, Battery Protector

• Z: Without Charger & Battery



Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Abrasive Paper Size	Rectangular: 93 x 228 mm (3-5/8 x 9")
Orbits Per Minute (OPM)	4,000, 8,000, 12,000
Strokes Per Minute (SPM)	8,000, 16,000, 24,000
Orbit Diameter	2.0 mm (1/16")
Dimensions (L x W x H)	336 x 92 x 169 mm (13-1/4 x 3-5/8 x 6-5/8")
Net Weight	1.9 - 2.2 kg (4.2 - 4.9 lbs)
Continuous Usage Time (approx.)	58 min with BL1860B

BO4556

RM 368

419

Finishing Sander

• 14,000 OPM for fast and smooth finish sanding.



Standard Equipment:
Abrasive Paper, Dust Bag, Punch Plate



Continuous Rating Input	200 W
Pad Size	112 x 102 mm (4-3/8 x 4")
Abrasive Paper Size	114 x 140 mm (4-1/2 x 5-1/2")
Orbits Per Minute (OPM)	14,000
Dimensions (L x W x H)	131 x 112 x 141 mm (5-1/8 x 4-3/8 x 5-9/16")
Net Weight	1.1 kg (2.5 lbs)
Power Supply Cord	2.0 m (6.6 ft)

BO3710

RM 379

64

Finishing Sander

• High capacity dust bag with built-in vacuum adaptor for improved dust collection.



Standard Equipment:
Dust Bag, Punch Plate



Continuous Rating Input	190 W
Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8 x 9")
Orbits Per Minute (OPM)	11,000
Strokes Per Minute (SPM)	22,000
Orbit Diameter	2.0 mm (1/16")
Dimensions (L x W x H)	253 x 92 x 154 mm (10 x 3-5/8 x 6-1/16")
Net Weight	1.6 kg (3.5 lbs)
Power Supply Cord	2.0 m (6.6 ft)

9035H

RM 337

419

Finishing Sander

• Rubberized large paper clamp levers for easy installation/ removal of paper.



Standard Equipment:
Abrasive Paper x6



Continuous Rating Input	180 W
Pad Size	93 x 185mm (3-5/8 x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8 x 9")
Orbits Per Minute (OPM)	11,000
Dimensions (L x W x H)	236 x 93 x 146 mm (9-1/4 x 3-5/8 x 5-3/4")
Net Weight	1.5 kg (3.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

BO4510H

RM 326

419

Finishing Sander

• Large clamp lever for easy install/ removal of paper.



Standard Equipment:
Abrasive Paper x6



Continuous Rating Input	170 W
Pad Size	110 x 100 mm (4-5/16 x 3-15/16")
Abrasive Paper Size	114 x 140 mm (4-1/2 x 5-1/2")
Orbits Per Minute (OPM)	12,000
Dimensions (L x W x H)	116 x 110 x 129 mm (4-9/16 x 4-5/16 x 5-1/8")
Net Weight	1.1 kg (2.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

DSL800Z 225 mm (8-7/8")

RM 4,640

Cordless Drywall Sander

18V



Standard Equipment:
Abrasive Disc, Hex Wrench, Tool Bag

• Z: Without Charger & Battery



Pad diameter	210 mm (8-1/4")
Abrasive Disc Size	225 mm (8-7/8")
No Load Speed (RPM)	1,000 - 1,800
Dimensions (L x W x H)	1,100 - 1,520 x 259 x 273 mm (43-1/4 - 59-3/4 x 10-1/4 x 10-3/4")
Net Weight	4.5 - 5.7 kg (10.0 - 12.6 lbs)
Continuous Usage Time (approx.)	35 min with BL1850B Speed Dial 3

BS001GZ01 76 x 533 mm (3 x 21")

RM 2,031

Cordless Belt Sander**40Vmax**

VIDEO CLIP

Models and specs may vary by country



BS001G

*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0AhStandard Equipment:
Dust Bag, Abrasive Belt• GZ01: With Makpac Connector Box Type 4,
Without Charger & Battery

Belt Width	76 mm (3")
Belt Length	533 mm (21")
Belt Speed	120 - 470 m/min (390 - 1,540 ft/min)
Dimensions (L x W x H)	440 x 148 x 165 mm (17-1/4 x 5-7/8 x 6-1/2")
Net Weight (with battery)	4.5 - 5.1 kg (9.9 - 11.2 lbs)
Continuous Usage Time (approx.)	12 min with BL4040 Douglas fir with sanding belt grit # 80

Accessories (Optional)**Clamp complete**

Part No. 192694-6

**Guide rule set**


Part No. 1915E3-1

**Sanding shoe set**

Part No. 193070-7

**Carbon plate**

Part No. 193197-3

**Cork rubber plate**

Part No. 193199-9

**9404** 100 mm x 610 mm (4" x 24")

RM 1,650

303

Belt Sander

• Powerful 1,010 W motor for fast material removal.

Standard Equipment:
Abrasive Belt, Dust Bag Assembly

Continuous Rating Input 1,010 W

Belt Size 100 x 610 mm
(4 x 24")Belt Speed 210 - 440 m/min
(690 - 1,440 ft/min)

Overall Length 334 mm (13-1/8")

Net Weight 4.8 kg (10.6 lbs)

Power Supply Cord 5.0 m (16.4 ft)

**DBS180Z** 9 mm x 533 mm (3/8" x 21")

RM 1,785

Cordless Belt Sander**18V**

VIDEO CLIP

Models and specs may vary by country



DBS180

Standard Equipment:
Sanding Belt, Grip, Grip Base

• Z: Without Charger & Battery



Belt Width	6 mm (1/4") 9 mm (3/8") 13 mm (1/2")
Belt Length	533 mm (21")
Belt Speed	600 - 1,700 m/min
Dimensions (L x W x H)	500 x 96 x 116 mm (19-3/4 x 3-3/4 x 4-9/16")
Net Weight	1.8 - 2.1 kg (4.0 - 4.6 lbs)

9031 30 mm x 533 mm (1-3/16" x 21")

RM 1,439

411

Belt Sander

• Versatile for use on wood, metal, and fiberglass materials.

Standard Equipment:
Abrasive Belt x10, Side Handle

Continuous Rating Input 550 W

Belt Size 30 x 533 mm
(1-1/8 x 21")Belt Speed 200 - 1,000 m/min
(656 - 3,280 ft/min)

Overall Length 380 mm (15")

Net Weight 2.1 kg (4.6 lbs)

Power Supply Cord 2.5 m (8.2 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita

Cutting

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
-int-

Cutting



DCC500Z

RM 1,271

Cordless Dustless Cutter

18V



Accessories
(Optional)

Water Supply Cover Set A

Part No. 191X01-4
RM 266.80



Standard Equipment:
Dust Bag, Hex Wrench

• Z: Without Charger & Battery



Blade Diameter	125 mm (5")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	90°: 40 mm (1-9/16") 45°: 27 mm
No Load Speed (RPM)	8,800
Dimensions (L x W x H)	283 x 158 x 172 mm (11-1/8 x 6-1/4 x 6-3/4")
Net Weight	2.5 - 3.0 kg (5.5 - 6.6 lbs)
Work Amount (approx.)	16 m with BL1850B Cutting 600 mm groove in brick Depth 10 mm (Dry type 125 mm Diamond Wheel)

CC301DZ 85 mm (3-3/8")

RM 715

Cordless Cutter

12Vmax



Standard Equipment:
Diamond Wheel, Water Supply Tank Assembly, Hex Wrench

• DZ : Without Charger, Battery & Carrying Case



Blade Diameter	85 mm (3-3/8")
Max Cutting Capacity	90°: 25.5 mm (1") 45°: 16.5 mm (5/8")
No Load Speed (RPM)	1,600
Tank Capacity	Water : 0.5 L
Dimensions (L x W x H)	313 x 170 x 125 mm (12-3/8 x 6-11/16 x 4-7/8")
Net Weight	1.9 kg (4.1 lbs)
Work Amount (approx.)	7.5 pcs with BL1021B Diamond Blade, Glass 10 x 300 mm

4100KB 125 mm (5")

RM 726

303

Dustless Cutter

• Powerful cutting in
stone, masonry,
tile, concrete
& more.



Standard Equipment:
Diamond Wheel (D-38261),
Dust Bag (1267380), Wrench, Hex Wrench



Continuous Rating Input	1,400 W
Blade Diameter	125 mm (5")
Max Cutting Capacity	40.0 mm (1-9/16")
No Load Speed (RPM)	12,200
Dimensions (L x W x H)	231 x 220 x 179 mm (9-1/8 x 8-5/8 x 7")
Net Weight	3.0 kg (6.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)



4100NH3Z 110 mm (4-3/8")

RM 453

303

Cutter

• Specialized for right angle
cutting only.



Standard Equipment:
Wrench, Hex Wrench



Continuous Rating Input	1,300 W
Blade Diameter	110 mm (4-3/8")
Max Cutting Capacity	90°: 32 mm (1-1/4")
No Load Speed (RPM)	13,800
Dimensions (L x W x H)	227 x 209 x 166 mm (8-15/16 x 8-1/4 x 6-1/2")
Net Weight	2.8 kg (6.2 lbs)
Power Supply Cord	2.0 m (6.6 ft)

4100NH2Z 110 mm (4-3/8")

RM 610

303

Cutter

• Bevel-cuts up to 45 degrees.



Standard Equipment:
Wrench, Hex Wrench



Continuous Rating Input	1,400 W
Blade Diameter	Max 125 mm (Max 5")
Max Cutting Capacity	90°: 32.5 mm (1-1/4") with 110mm (4-3/8") wheel 45°: 21.5 mm (7/8")
Max Cutting Capacity	90°: 40.0 mm (1-9/16") with 125mm (5") wheel 45°: 27.0 mm (1-1/16")
No Load Speed (RPM)	12,200
Dimensions (L x W x H)	238 x 214 x 169 mm (9-3/8 x 8-3/8 x 6-5/8")
Net Weight	3 kg (6.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

4100NH 110 mm (4-3/8")

RM 537

303

Cutter

• *Powerful cutting in stone, masonry, tile & concrete.*



Standard Equipment:
Wrench, Socket Wrench



Continuous Rating Input	1,300 W
Blade Diameter	110 mm (4-3/8")
Max Cutting Capacity	90°: 34 mm (1-3/8")
No Load Speed (RPM)	14,500
Dimensions (L x W x H)	234 x 210 x 165 mm (9-1/4 x 8-1/4 x 6-1/2")
Net Weight	2.9 kg (6.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

4107R 180 mm (7-1/8")

RM 2,257

153

Cutter

• *Ideal for stone materials (such as granite and marble), concrete and asphalt.*



WHILE STOCK LAST

Standard Equipment: Socket Wrench,
Offset Wrench, Water Plug & Tube



Continuous Rating Input	1,400 W
Capacity	Max cutting: 60 mm (2-3/8")
Blade Diameter	180 mm (7-1/8")
No Load Speed (RPM)	5,000
Overall Length	370 mm (14-9/16")
Net Weight	6.3 kg (14.5 lbs)
Power Supply Cord	5.0m (16.4 ft)

CS002GZ 185 mm (7-1/4")

RM 2,878

Cordless Metal Cutter

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah



Standard Equipment:
TCT Saw Blade (E-12918),
Hex Wrench, Guide Rule

• GZ: Without Charger & Battery



Wheel Diameter	185 mm (7-1/4")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	0°: 67 mm (2-5/8")
No Load Speed (RPM)	3,500
Dimensions (L x W x H)	350 x 232 x 270 mm (13-3/4 x 9-1/8 x 10-5/8")
Net Weight	4.2 - 5.4 kg (9.3 - 11.9 lbs)
Work Amount (approx.)	210 pcs with BL4050F Saw Blade - cut 2-1/2" equal angle steel bars (t = 6.0 mm)

DCS553Z 150 mm (5-7/8")

RM 1,976

Cordless Metal Cutter

18V



Standard Equipment:
TCT Saw Blade, Hex Wrench, Guide Rule

• Z: Without Charger & Battery



Max Output	600 W
Blade Diameter	150 mm (5-7/8")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	90°: 57.5 mm (2-1/4")
No Load Speed (RPM)	4,200
Dimensions (L x W x H)	267 x 186 x 250 mm (10-1/2 x 7-3/8 x 9-7/8")
Net Weight	2.8 - 3.1kg (6.1 - 6.8 lbs)
Work Amount (approx.)	125 cuts with BL1850B Saw Blade - Carbon Steel Pipe Ø 34 mm, Thickness 3.2 mm

DCS552Z 136 mm (5-3/8")

RM 1,220

430

Cordless Metal Cutter

18V



Standard Equipment:
TCT Saw Blade (B-07319), Hex Wrench

• Z: Without Charger & Battery



Max Output	370 W
Blade Diameter	136 mm (5-3/8")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	90°: 50.5 mm (2")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	348 x 196 x 203 mm (13-3/4 x 7-3/4 x 8")
Net Weight	2.4 - 2.7 kg (5.3 - 6.0 lbs)
Work Amount (approx.)	125 cuts with BL1850B Saw Blade - Carbon Steel Pipe Ø 34 mm, Thickness 3.2 mm



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Cutting

LC1230 305 mm (12")

RM 2.625

203mm

Metal Cutting Saw

For cutting in pipe, angle iron, conduit and more.



Standard Equipment:
Carbide-Tipped Saw Blade,
Socket Wrench

Continuous Rating Input

1,750 W

Blade Diameter

305 mm (12")

Max Cutting Capacity

90°: 115 mm (4-1/2")
90°: 75 x 150 mm
(2-15/16 x 5-7/8")
45°: 90 mm (3-1/2")
45°: 85 x 85 mm
(3-5/16 x 3-5/16")

No Load Speed (RPM)

1,300

Dimensions (L x W x H)

516 x 306 x 603 mm
(20-1/4 x 12 x 23-3/4")

Net Weight

19.3 kg (42.5 lbs)

Power Supply Cord

2.5 m (8.2 ft)



Why Makita Carbide-tipped Metal Cutting saw VS. Abrasive Cutting Saw










Carbide-Tipped Blades make Virtually Spark-Free Cuts



Abrasive Blades make Cuts with Sparks


Makita's Carbide-Tipped Metal Blades Cuts Cleaner

Tubing	Threaded Rod	UNISTRUT™	Angle Iron	Pipe
 Makita Carbide - Tipped Blade	 Makita Carbide - Tipped Blade	 Makita Carbide - Tipped Blade	 Makita Carbide - Tipped Blade	 Makita Carbide - Tipped Blade
 Abrasive Blade	 Abrasive Blade	 Abrasive Blade	 Abrasive Blade	 Abrasive Blade


Carbide-Tipped Metal Blades for Many Applications



Recommended Applications
★ Excellent
○ Good
▲ Fair
× Not Applicable



Angle



Tubing



Channel



Round Pipe

Size (mm)	Tip thickness	Part No.	Nominal thickness						
			6 mm	4 mm	3 mm	4.5 mm	2.3 mm	3.2 mm	3.8 mm
305 x 60T (Mild steel)	2.1 mm	A-87242	○	○	○	▲	×	★	★
305 x 60T (Mild steel)	2.4 mm	D-71364	○	○	○	▲	×	○	★
305 x 60T (Mild steel)	2.5 mm	A-81860	○	○	★	○	×	★	★
305 x 60T (Mild steel) lessen noise	2.4 mm	A-86723	★	★	★	○	×	★	★
305 x 78T (Thin steel)	2.3 mm	A-87127	▲	▲	▲	×	○	▲	▲
305 x 78T (Thin steel)	1.95 mm	A-87579	○	○	▲	×	★	▲	★

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Metal Cutting Tips & Process


Carbide-Tipped Metal Blade Cutting Tips

- Always wear safety glasses, gloves, protective equipment and follow instructions provided with power tool.
- Do not apply excessive pressure on the handle when cutting as damage to the carbide-tips can be a result.
- Too little or too much pressure on the handle may result in more sparks and premature blade wear.
- Use block spacers when cutting square/rectangle tubing as well as channel and UNISTRUT™ for longer blade life.
- When cutting long pieces of metal always use support blocks on both sides so the metal will be level with the saw base.
- Do not touch blade or metal immediately after cut.


Process using Carbide - Tipped Alloy Metal Cutting Blade

- 1 Ensure metal is properly placed on saw base and firmly secured in the saw.
- 2 Hold the saw handle firmly and wait until full speed is obtained.
- 3 Lower the handle gently to bring the blade close to the metal.
- 4 Gently ease the blade into the metal and add minimal pressure (reduce pressure if sparks appear).
- 5 After completed cut, turn off power tool and wait until blade has come to a complete stop then raise the handle back.
(if handle is raised back with blade still rotating then the blade may be caught).


Metal Cutting Process

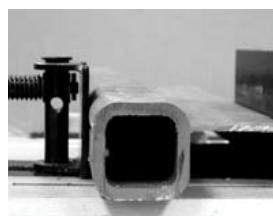


Square & Rectangle Tubing
(use block spacer)

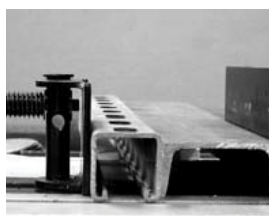

Channels & UNISTRUT™
(use block spacer)

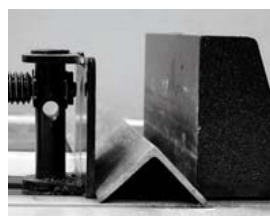

Angle

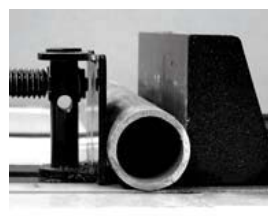


Round Pipe



Threaded Rod

Block Spacer Reference Chart

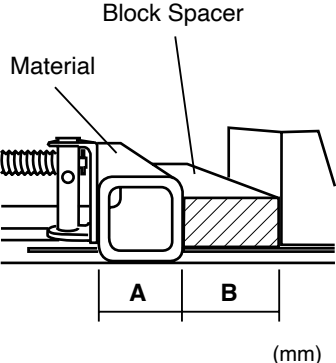Applications	Square & Rectangle Tubing				Round Pipe		Square & Rectangle Tubing		Round Pipe	
The Height of Material	90 Degree Cutting						45 Degree Cutting			
	Up to 75 mm		Up to 100 mm		—		Up to 85 mm		—	
 Block Spacer Material A B (mm)	A	B	A	B	A	B	A	B	A	B
	25	125	25	75	25	90	25	60	25	65
	50	100	50	50	50	65	50	35	50	40
	75	75	75	25	75	40	75	10	75	15
	100	50	100	0	100	15	85	0	90	0
	125	25	—	—	115	0	—	—	—	—
	150*	0	—	—	—	—	—	—	—	—

Hint: Block Spacer should be determined by subtracting the metal width from 150 mm.

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

makita
int

Cutting

CE002GZ 355 mm (14")

RM 6,928

Cordless Power Cutter

40Vmax x2



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries



Standard Equipment:
Ring Set, Box Wrench 13-19,
Laser Diamond Wheel Segmented (D-56998)

* GZ: Without Charger & Battery



Wheel Diameter	355 mm (14")
Max Cutting Capacity	127 mm (5")
No Load Speed (RPM)	4,200
Max Output	4,000 W
Dimensions (L x W x H)	825 x 272 x 487 mm (32-1/2 x 10-3/4 x 19-1/4")
Net Weight	13.1 - 15.1 kg (28.9 - 33.3 lbs)
Continuous Usage Time (approx.)	27 cuts with BL4080F x2 50 mm depth x 300 mm width with diamond wheel

CE001GZ01 355 mm (14")

RM 6,734

Cordless Power Cutter

40Vmax x2



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries



Standard Equipment:
Diamond Wheel (E-12996),
Wrench, Coupling Sleeve, Ring

* GZ01: Without Charger & Battery



Wheel Diameter	355 mm (14")
Wheel Hole Diameter	25.4 mm (1")
Max Wheel Thickness	5.0 mm (3/16")
Min Wheel Thickness	2.0 mm (5/64")
Max Cutting Capacity	127 mm (5")
No Load Speed (RPM)	5,300
Dimensions (L x W x H)	786 x 272 x 433 mm (31 x 10-3/4 x 17")
Net Weight	12.3 - 14.1 kg (27.1 - 31.1 lbs)
Work Amount (approx.)	18 cuts with BL4050F x2, Concrete cutting 50 mm depth x 300 mm wide with Diamond Wheel

CE004GZ 305 mm (12")

RM 3,906

Cordless Power Cutter

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries



Standard Equipment:
Box Wrench, Wrench Holder Assembly,
Coupling Sleeve, Ring Set, Flange

* GZ: Without Charger & Battery



Wheel Diameter	305 mm (12")
Wheel Hole Diameter	25.4 mm (1")
Max Wheel Thickness	5.0 mm (3/16")
Min Wheel Thickness	2.0 mm (5/64")
Max Cutting Capacity	121 mm (4-3/4")
No Load Speed (RPM)	5,000
Dimensions (L x W x H)	663 x 240 x 406 mm (26-1/8 x 9-1/2 x 16")
Net Weight (with battery)	6.7 - 7.7 kg (14.8 - 17.0 lbs)
Work Amount (approx.)	9 cuts with BL4050F Concrete cutting 50 mm depth x 300 mm wide with diamond wheel and water supply

4114S 355 mm (14")

RM 3,487

Angle Cutter

• Faster cutting for increased productivity.



Standard Equipment:
Wrench



Continuous Rating Input	2,400 W
Capacity	Max cutting: 125 mm (5")
Wheel Diameter	355 mm (14")
Hole Diameter	25.4 mm (1")
No Load Speed (RPM)	3,500
Dimensions (L x W x H)	673 x 240 x 329 mm (26-1/2 x 9-1/2 x 13")
Net Weight	10.8 kg (23.9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

SG1251J 125 mm (5")

RM 2,887

Wall Chaser

• Clean, compact and comfortable.



Standard Equipment:
Diamond Wheel x2, Hex Wrench,
Lock Nut Wrench



Continuous Rating Input	1,400 W
Capacity	Depth: 0 - 30 mm (0 - 1-3/16") Width: 6 - 30 mm (1/4 - 1-3/16")
Blade Diameter	125 mm (5")
No Load Speed (RPM)	10,000
Dimensions (L x W x H)	350 x 151 x 178 mm (13-3/4 x 5-15/16 x 7")
Net Weight	4.3 kg (9.5 lbs)
Power Supply Cord	5.0 m (16.4 ft)

CA5000X 118 mm (4-5/8")

RM 3,067

Aluminum Groove Cutter

• Cutter blade for 135 degrees
V shaped groove as an option.



Standard Equipment:
Plate, Hex Wrench,
Cutter Blade 90° (B-48832)



Continuous Rating Input	1,300 W
Blade Type	Cutter blade/ TCT saw blade
Max Cutting Capacity with Cutter blade	with Guide rail: 11 mm (7/16")
Max Cutting Capacity with TCT Saw blade	with Guide rail: 36 mm (1-7/16") without Guide rail: 41 mm (1-5/8")
No Load Speed (RPM)	2,200 - 6,400
Dimensions (L x W x H)	346 x 250 x 250 mm (13-5/8 x 9-7/8 x 9-7/8")
Net Weight	4.7 kg (10.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

DLW140 Cordless Portable Cut-off

CUTTING CAPACITY A workpiece thinner than 1.6 mm is recommended for cutting with this tool.

Form of Materials				
Miter Angle 0°	D: Ø 127 mm (5")	H x W: 115 x 130 mm (4-1/2"x5-1/8") 102 x 194 mm (4 x 7-5/8") 70 x 233 mm (2-3/4 x 9-1/8")	H x W: 119 x 119 mm (4-11/16 x 4-11/16")	S x S: 137 x 137 mm (5-3/8 x 5-3/8")
Miter Angle 45°	D: Ø 127 mm (5")	H x W: 115 x 103 mm (4-1/2 x 4-1/16")	H x W: 106 x 106 mm (4-3/16 x 4-3/16")	S x S: 100 x 100 mm (4 x 4")

D: Diameter | W: Width | H: Height | S: Side

DLW140Z 355 mm (14")
RM 2,301

Cordless Portable Cut-off

18V x2



VIDEO CLIP
Models and specs
may vary by country



DLW140

Standard Equipment:
Cut-Off Wheel (B-64696)

• Z: Without Charger & Battery



Wheel Diameter	355 mm (14")
Hole Diameter	25.4 mm (1")
Max Wheel Thickness	3 mm (1/8")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 127 mm (5") Rectangular: 115x130 mm (4-1/2"x5-1/8") Rectangular: 102x194 mm (4"x7-5/8") Rectangular: 70x233 mm (2-3/4"x9-1/8")
Capacity at 45°	Round: 127 mm (5") Rectangular: 115 x 103 mm (4-1/2"x4-1/16")
Dimensions (L x W x H)	537 x 280 x 640 mm (21-1/8 x 11 x 25-1/4")
Net Weight	17.2 - 17.8 kg (37.9 - 39.3 lbs)
Work Amount (approx.)	130 cuts with BL1850B x2 Metal Stud (H:75 mm, W: 45 mm, T: 0.8 mm)

Model No.	Cutting Angle	Round Pipe	Rectangular Metal	Square Metal	Angle Bar
LC1230	90°	115 mm	150 x 75 mm	100 mm	100 mm
	45°	90 mm	85 x 85 mm	85 mm	85 mm
LW1400	90°	127 mm	233 x 70 mm	119 mm	137 mm
	45°	127 mm	115 x 103 mm	106 mm	100 mm
LW1401	90°	127 mm	233 x 70 mm	119 mm	137 mm
	45°	127 mm	115 x 103 mm	106 mm	100 mm
2416S	90°	115 mm	230 x 80 mm	120 mm	150 mm
	45°	115 mm	110 x 110 mm	110 mm	110 mm

2416S 405 mm (16")
RM 3,307

Portable Cut-off
• Mitres 45°
left and right.



Standard Equipment:
Abrasive Cut-Off Wheel,
Socket Wrench

Continuous Rating Input	1,430 W
Wheel Diameter	405 mm (16")
Hole Diameter	25.4 mm (1")
No Load Speed (RPM)	2,300
Dimensions (L x W x H)	610 x 265 x 535 mm (24 x 10-3/8 x 21")
Net Weight	19.2 kg (42.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

LW1401 355 mm (14")
RM 982

Portable Cut-off
• Powerful 2,200W
motor.



Standard Equipment:
Abrasive Cut-Off Wheel,
Socket Wrench



Continuous Rating Input	2,200 W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Capacity at 45°	Round: 127 mm (5") Rectangular: 115 x 103 mm (4-1/2 x 4-1/16") Square: 106 x 106 mm (4-3/16 x 4-3/16") Triangular: 100 x 100 x 10 mm (4 x 4 x 3/8")
Dimensions (L x W x H)	500 x 295 x 640 mm (19-3/4 x 11-5/8 x 25-1/4")
Net Weight	18.3 kg (40.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Cutting

DSC251ZK

RM 8,295

Cordless Steel Rod Cutter

18V



Standard Equipment:

Tipped Saw, Dust Bag, Side Grip, Hex Wrench

• ZK: With Carrying Case, Without Charger & Battery



Blade Diameter	110 mm (4-5/16")
Cutting Capacity	Dia.: 10 - 25 mm (3/8 - 1")
No Load Speed (RPM)	2,200
Dimensions (L x W x H)	471 x 137 x 139 mm (18-1/2 x 5-3/8 x 5-1/2")
Net Weight	3.9 - 4.0 kg (8.7 - 8.8 lbs)
Work Amount (approx.)	60 pcs with BL1850B Cutting Rebar SD345 490 N/mm² D25

DSC191Z

RM 19,845

Cordless Steel Rod Cutter

18V



Standard Equipment:

Wrench, Hex Wrench, Oil supply

• Z: Without Charger & Battery



Cutting Capacity	Dia.: 3 - 20 mm (1/8 - 3/4")
Cutting Speed (sec)	6.5
Dimensions (L x W x H)	412 x 212 x 284 mm (16-1/5 x 8-3/8 x 11-1/8")
Net Weight	11.1 - 11.2 kg (24.5 - 24.6 lbs)
Work Amount (approx.)	333 pcs with BL1850B Cutting (Rebar Ø 10)

DSC162Z | DSC163ZK

RM 18,585

RM 19,215

Cordless Steel Rod Cutter

18V



Standard Equipment:

Wrench, Hex Wrench, Oil supply

• Z : Without Charger & Battery
• ZK: With Carrying Case, Without Charger & Battery



Cutting Capacity	Dia.: 3 - 16 mm (1/8 - 5/8")
Cutting Speed (sec)	DSC162 4.0 DSC163 2.8
Dimensions (L x W x H)	DSC162 380 x 108 x 265 mm (15 x 4-1/4 x 10-3/8") DSC163 360 x 108 x 276 mm (14-1/8 x 4-1/4 x 10-7/8")
Net Weight	DSC162 7.1 kg (15.7 lbs) DSC163 6.9 kg (15.2 lbs)
Work Amount (approx.)	DSC162 191 pcs with BL1850B Cutting (Rebar Ø 16) DSC163 233 pcs with BL1850B Cutting (Rebar Ø 16)

DSC121ZK

RM 17,253

Cordless Threaded
Rod Cutter

18V



Standard Equipment:

W3/8 Cutter Blade, Stand, Oil, Hex Wrench

• ZK: With 1x Makpac Connector Box, Without Charger & Battery



Capacity	Steel: 8 - 12 mm (5/16 - 1/2")
Cutting Speed (sec)	3.0
Dimensions (L x W x H)	212 x 323 x 260 mm (8-3/8 x 12-3/4 x 10-1/4")
Net Weight	6.0 kg (13.2 lbs)
Work Amount (approx.)	420 rods with BL1850B (Mild steel M12)

SC103DZJ

RM 5,378

Cordless Threaded
Rod Cutter


12Vmax



Standard Equipment:

Cutter Blade W3/8 (199081-0), Hex Socket Head Bolt,
Blade Cover, Depth Gauge, Thumb Screw, Hex Wrench

• DZJ: With 1x Makpac Connector Box, Without Charger & Battery



Max Cutting Capacity	Mild Steel: M10 Stainless Steel: W3/8
Min. Cutting Length	20 mm (13/16")
Dimensions (L x W x H)	180 x 107 x 289 mm (7-1/8 x 4-1/4 x 11-3/8")
Net Weight	2.7 - 2.8 kg (6.0 - 6.2 lbs)
Work Amount (approx.)	550 pcs with BL1041B Mild Steel M10

DMC300Z 76 mm (3")

RM 918

Cordless Compact Cut Off**18V****Standard Equipment:**

Dust Collection Cover, Diamond Wheel (1 pc),
Cut-off Wheel (1 pc), Multi Carbide Wheel (1 pc),
Hex Wrench

• Z : Without Charger, Battery & Carrying Case



*Not applicable
for Z model

BL MOTOR AFT XPT

Max Output	390 W
Wheel Diameter	76 mm (3")
Hole Diameter	9.5 mm (3/8), 10 mm (13/32")
Wheel Plate Thickness	1.0 mm (1/32")
No Load Speed (RPM)	20,000
Max Cutting Capacity	13.5 mm (1/2") with dust cover attachment 16.0 mm (5/8") without dust cover attachment
Dimensions (L x W x H)	271 x 104 x 182 mm (10-5/8 x 4-1/8 x 7-1/8")
Net Weight	1.2 - 1.7kg (2.6 - 3.7 lbs)
Work Amount (approx.)	283 cuts with BL1860B Cut off M10 steel rod with Cut-off wheel

CP100DZ

RM 473

Cordless Multi Cutter**12Vmax**

▶ VIDEO CLIP
Models and specs
may vary by country



CP100D

**Standard Equipment:**

Blade

• DZ: Without Charger & Battery

Max Cutting Capacity	6 mm (1/4")
No Load Speed (RPM)	300
Dimensions (L x W x H)	BL1021B: 272 x 66 x 120 mm (10-3/4 x 2-5/8 x 4-3/4") BL1041B: 291 x 66 x 121 mm (11-1/2 x 2-5/8 x 4-3/4")
Net Weight	0.72 - 0.88 kg (1.6 - 1.9 lbs)
Work Amount (approx.)	1600 cuts (800 m) with BL1021B Cardboard Carton 5 mm (T) 500 mm (L)

PB002GM201 | PB002GZ

RM 5,837

RM 3,214

**Cordless Portable
Band Saw****40Vmax**

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

**Standard Equipment:** Band Saw Blade, Hex Wrench

• GM201: 1x Fast Charger, 2x 4.0Ah Battery
• GZ : Without Charger, Battery & Carrying Case



*Not applicable
for Z model

BL MOTOR XPT

Capacity	Round: 127 mm (5") Square: 127 x 127 mm (5 x 5")
Blade Speed	0 - 3.2 m/min (0 - 630 ft/min)
Blade Size	Length: 1,140 mm (45") Width: 13 mm (1/2") Thickness: 0.5 mm (0.02")
Dimensions (L x W x H)	510 x 218 x 314 mm (20 x 8-5/8 x 12-3/8")
Net Weight	6.6 - 7.8 kg (14.6 - 17.2 lbs)
Work Amount (approx.)	31 pcs with BL4040 Cutting 4" carbon steel pipe 100A 6.0 mm thickness

DPB182Z

RM 1,556

**Cordless Portable
Band Saw****18V**

▶ VIDEO CLIP
Models and specs
may vary by country



DPB182

**Standard Equipment:**

Band Saw Blade, Hex Wrench

• Z: Without Charger & Battery



Capacity	Round: 64 mm (2-1/2") Rectangular: 64 x 64 mm (2-1/2 x 2-1/2")
Blade Speed	3.2 m/s (630ft/ min.)
Blade Size	Length: 835 mm (32-7/8") Width: 13 mm (1/2") Thickness: 0.5 mm (0.02")
Dimensions (L x W x H)	477 x 197 x 229 mm (18-3/4 x 7-3/4 x 9")
Net Weight	3.8 - 4.1 kg (8.3 - 9.0 lbs)
Work Amount (approx.)	210 pcs with BL1850B Cutting steel wire tube Ø 38.1 mm 1.4 mm thickness

DPB184Z

RM 1,870

**Cordless Portable
Band Saw****18V**

▶ VIDEO CLIP
Models and specs
may vary by country



DPB184

**Standard Equipment:**

Band Saw Blade, Hex Wrench

• Z: Without Charger & Battery



Capacity	Round: 51 mm (2") Square: 51 x 51 mm (2 x 2")
Blade Speed	0 - 3.2 m/s (0 - 630 ft/min.)
Blade Size	Length: 730 mm (28-3/4") Width: 13 mm (1/2") Thickness: 0.5 mm (0.02")
Dimensions (L x W x H)	373 x 162 x 223 mm (14-3/4 x 6-3/8 x 8-3/4")
Net Weight	3.3 - 3.6 kg (7.3 - 7.9 lbs)
Work Amount (approx.)	400 pcs with BL1850B Cutting steel wire tube Ø 25.4 mm 1.2 mm thickness

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Cutting

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
-int-

2107F

RM 2,257

303 

Portable Band Saw

• Built-in fluorescent job light for clear view.




Standard Equipment:
Band Saw Blade,
Hex Wrench



Accessories (Optional)

Portable Band Saw
Stand & Cover
Part No. 196326-7
RM 5058.20

Continuous Rating Input Capacity	710 W
	Round: 120 mm (4-3/4") Rectangular workpiece w/o stand: 120 x 120 mm (4-3/4 x 4-3/4")
Blade Speed	60 - 105 m/min (200 - 350 ft/min)
Dimensions (L x W x H)	508 x 188 x 256 mm (20 x 7-3/8 x 10-1/8")
Net Weight	6.3 kg (13.9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

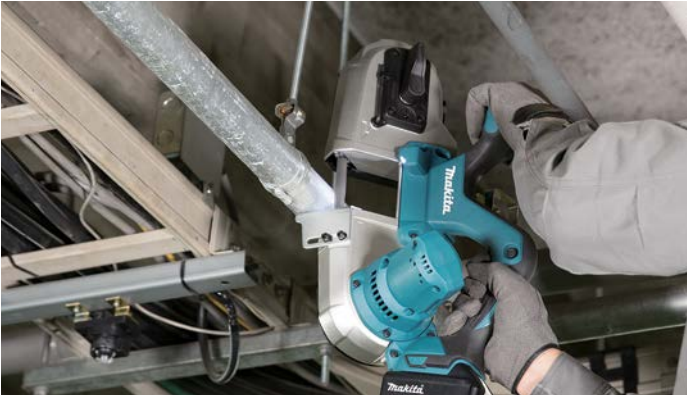

DPP200ZK

RM 15,450

440 

Cordless Hole Puncher

18V



*Not compatible with 2.0Ah, 1.5Ah batteries



Standard Equipment:
Punch, Dice, Hex Wrench,
Spanner, Bar for fastening nuts, Grip, Oil

• ZK: With Carrying Case, Without Charger & Battery



Capacity	Steel: 20 mm (13/16") Stainless Steel: 20 mm (13/16")
Max Throat Depth	40 mm (1-9/16")
Dimensions (L x W x H)	417 x 127 x 315 mm (16-3/8 x 5 x 12-3/8")
Net Weight	10.5 kg (23.2 lbs)
Work Amount (approx.)	110 holes with BL1830B on General steel for Ø 20 mm with 6 mm Thickness

DJS161Z 1.6 mm

RM 1,776

430 

Cordless Straight Shear

18V



Standard Equipment:
Hex Wrench, Thickness Gauge

• Z: Without Charger & Battery

Capacity	Steel up to 400 N/mm²: 1.6 mm Steel up to 600 N/mm²: 1.2 mm Aluminum up to 200 N/mm²: 2.5 mm
Strokes Per Minute (SPM)	4,300
Dimensions (L x W x H)	362 x 78 x 118 mm (14-1/4 x 3-1/16 x 4-5/8")
Net weight	1.8 - 2.2 kg (4.1 - 4.8 lbs)
Work Amount (approx.)	95 pcs with BL1850B Cutting (Thin Metal Plate 1.2 mm)

DJN161Z 1.6 mm (16 Ga)

RM 2,239

430 

Cordless Nibbler

18V



Standard Equipment:
Hex Wrench, Wrench, Punch, Die

• Z: Without Charger & Battery

Capacity	Steel up to 400 N/mm²: 1.6 mm Steel up to 600 N/mm²: 1.2 mm Aluminum up to 200 N/mm²: 2.5 mm
Min. Cutting Radius	Inside edge: 45 mm (1-3/4") Outside edge: 50 mm (2")
Strokes Per Minute (SPM)	1,900
Dimensions (L x W x H)	313 x 78 x 189 mm (12-3/8 x 3-1/16 x 7-7/16")
Net weight	1.9 - 2.3 kg (4.3 - 5.0 lbs)
Work Amount (approx.)	30 m with BL1850B Cutting (Steel Plate 1 mm)

JS1601 1.6 mm (16 Ga)

RM 1,650

459 

Straight Metal Shear

• Fast cutting action in steel and aluminum.



Standard Equipment:
Hex Wrench, Thickness Gauge



Continuous Rating Input Capacity	380 W
	Steel up to 400 N/mm²: 1.6 mm Steel up to 600 N/mm²: 1.2 mm Steel up to 800 N/mm²: 0.8 mm Aluminum up to 200 N/mm²: 2.5 mm 250 mm (9-7/8")
Min. Cutting Radius	250 mm (9-7/8")
Strokes Per Minute (SPM)	4,500
Dimensions (L x W x H)	320 x 70 x 78 mm (12-5/8 x 2-3/4 x 3-1/16")
Net Weight	1.4 kg (3.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

JS1602 1.6 mm (16 Ga)

RM 1,681

459 

Metal Shear

• Fast and efficient cutting.



Standard Equipment:
Hex Wrench, Shear Blade Set



Continuous Rating Input Capacity	380 W
	Steel up to 400 N/mm²: 1.6 mm Steel up to 600 N/mm²: 1.2 mm Steel up to 800 N/mm²: 0.8 mm Aluminum up to 200 N/mm²: 2.5 mm 30 mm (1-3/16")
Min. Cutting Radius	30 mm (1-3/16")
Strokes Per Minute (SPM)	4,000
Dimensions (L x W x H)	255 x 74 x 146 mm (10 x 2-15/16 x 5-3/4")
Net Weight	1.6 kg (3.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

JS3201 3.2 mm (10 Ga)

RM 2,048

303 **Metal Shear**

- **Powerful**
710 W motor.



Standard Equipment:
Shear Blade Set, Hex Wrench,
Thickness Gauge



Continuous Rating Input Capacity	710 W Steel up to 400 N/mm ² : 3.2 mm Steel up to 600 N/mm ² : 2.5 mm Steel up to 800 N/mm ² : 1.5 mm Aluminum up to 200 N/mm ² : 4.0 mm
Min. Cutting Radius	50 mm (2")
Strokes Per Minute (SPM)	1,600
Dimensions (L x W x H)	213 x 90 x 239 mm (8-3/8 x 3-1/2 x 9-3/8")
Net Weight	3.4 kg (7.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

JN1601 1.6 mm (16 Ga)

RM 1,828

411 **Nibbler**

- **2,200 SPM for faster and smooth cutting.**



Standard Equipment:
Hex Wrench, Wrench, Punch, Die



Continuous Rating Input Capacity	550 W Steel up to 400 N/mm ² : 1.6 mm Steel up to 600 N/mm ² : 1.2 mm Steel up to 800 N/mm ² : 0.8 mm Aluminum up to 200 N/mm ² : 2.5 mm
Min. Cutting Radius	Outside Edge: 50 mm (2") Inside Edge: 45 mm (1-3/4")
Strokes Per Minute (SPM)	2,200
Overall Length	261 mm (10-1/4")
Net Weight	1.6 kg (3.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

JN3201 3.2 mm (10 Ga)

RM 2,606

303 **Nibbler**

- **Built-in thickness gauge for operator convenience.**



Standard Equipment:
Punch, Die, Wrench 50,
Hex Wrench, Washer



Continuous Rating Input Capacity	710 W Steel up to 400 N/mm ² : 3.2 mm Steel up to 600 N/mm ² : 2.5 mm Steel up to 800 N/mm ² : 1.0 mm Aluminum up to 200 N/mm ² : 3.5 mm
Min. Cutting Radius	Outside Edge: 128 mm (5-1/16") Inside Edge: 120 mm (4-3/4")
Strokes Per Minute (SPM)	1,300
Dimensions (L x W x H)	225 x 90 x 254 mm (8-7/8 x 3-1/2 x 10")
Net Weight	3.4 kg (7.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

**DTC100ZK** 50 mm (2")

RM 11,406

Cordless Cable Cutter

18V



Closed Type Blade ▶



Standard Equipment:
Blade

- ZK: With Carrying Case, Without Charger & Battery



Max Blade Opening Width	50 mm (2")
Max Cable Cutting Capacity	600V - CV: 500 mm ² single-core (Ø 38 mm 1-1/2") 6600V - CV: 500 mm ² single-core (Ø 45 mm 1-3/4") 600V - IV: 500 mm ² single-core (Ø 35 mm 1-3/8") 600V - VVR: 150 mm ² triple-core (Ø 47 mm 1-7/8")
Dimensions (L x W x H)	116 x 197 x 363 mm (4-9/16 x 7-3/4 x 14-1/4")
Net Weight	2.9 kg (6.4 lbs)

DTC101ZK 50 mm (2")

RM 13,435

Cordless Cable Cutter

18V



Open Type Blade ▶



Standard Equipment:
Blade

- ZK: With Carrying Case, Without Charger & Battery



Max Blade Opening Width	50 mm (2")
Max Cable Cutting Capacity	600V - CV: 500 mm ² single-core (Ø 38 mm 1-1/2") 6600V - CV: 500 mm ² single-core (Ø 45 mm 1-3/4") 600V - IV: 500 mm ² single-core (Ø 35 mm 1-3/8") 600V - VVR: 150 mm ² triple-core (Ø 47 mm 1-7/8")
Dimensions (L x W x H)	116 x 190 x 430 mm (4-9/16 x 7-1/2 x 17")
Net Weight	3.6 kg (7.9 lbs)

DTC102ZK 65 mm (2-9/16")

RM 11,718

Cordless Cable Cutter

18V



Closed Type Blade ▶



Standard Equipment:
Blade

- ZK: With Carrying Case, Without Charger & Battery



Max Blade Opening Width	65 mm (2-9/16")
Max Cable Cutting Capacity	Non-ferrous materials only (Al or Cu): 65 mm (2-9/16")
Dimensions (L x W x H)	116 x 240 x 401 mm (4-9/16 x 9-1/2 x 15-3/4")
Net Weight	3.5 kg (7.7 lbs)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Cutting

DTC103ZK 54 mm (2-1/8")
RM 18,750

Cordless Cable Cutter

18V



Closed Type Blade ▶



Standard Equipment:
Blade

• ZK: With Carrying Case, Without Charger & Battery




Max Blade Opening Width	54 mm (2-1/8")
Max Cable Cutting Capacity	ACSR: Al 550 mm² / ST 70 mm²
Dimensions (L x W x H)	116 x 240 x 401 mm (4-9/16 x 9-1/2 x 15-3/4")
Net Weight	5.5 kg (12.1 lbs)

DTC104
Cordless Cable Cutter

Cable type	Cutting capacity
Polyethylene power cable	Ø 72 mm (4 x 325 mm²)
PVC insulated multi-core cable	Ø 77 mm (3 x 325 mm²)
Annealed copper wire	Ø 105 mm (1,300 mm²)
Hard-drawn copper wire	Ø 90 mm (1,300 mm²)
Aluminum wire	Ø 105 mm (1,300 mm²)

Output Force
120 kN

Maximum blade
opening width
105 mm

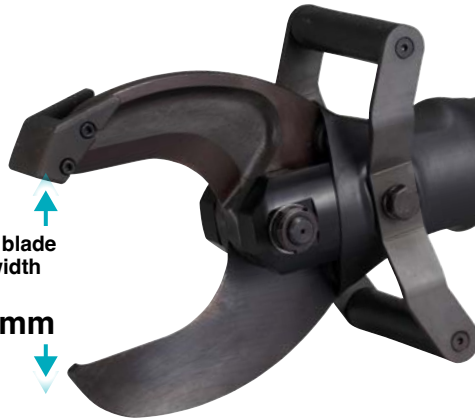

Switch trigger
closes the blades to perform
the cutting operation.



Metal holes for
attaching the optional
shoulder strap.



Single
LED job light with
afterglow function.

Automatic reverse function

The blades automatically return to their original position after completing the cutting operation, enhancing work efficiency.



Release button

Opens the blades to the
maximum opening angle.



DTC104ZK
RM 40,000

Cordless Cable Cutter

18V



NEW




• ZK: With Carrying Case, Without Charger & Battery



Output Force	120 kN
Max Blade Opening Width	105 mm (4-1/8")
Max Cable Cutting Capacity	Polyethylene power cable: ø72 mm (4 x 325 mm²) Annealed copper wire: ø105 mm (1,300 mm²) Aluminum wire: ø105 mm (1,300 mm²) PVC insulated multi-core cable: ø77 mm (3 x 325 mm²) Hard-drawn copper wire: ø90 mm (1,300 mm²)
Dimensions (L x W x H)	718 x 123 x 267 mm (28-1/4 x 4-7/8 x 10-1/2")
Net Weight (with battery)	10.2 - 10.5 kg (22.5 - 23.1 lbs.)

DTC301 | DTC302
Cordless Crimper

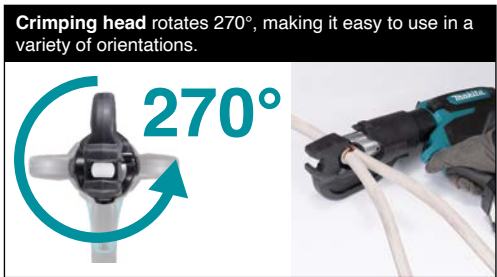

- Auto retract function**
- The ram automatically retracts to its original position after completing the crimping operation, enhancing work efficiency.
 - The On/ Off setting of the auto retract function can be switched by turning the screw.



DTC301ZK
RM 20,000

Cordless Crimper

18V



• ZK: With Carrying Case, Without Charger & Battery



Output Force	120 kN
Ram Stroke Length	31 mm (1-1/4")
Crimping Capacity	Cu: Ø 19.5 mm (300 mm²) Al: Ø 19.5 mm (300 mm²)
Dimensions (L x W x H)	415 x 92 x 346 mm (16-3/8 x 3-5/8 x 13-5/8")
Net Weight (with battery)	6.8 - 7.1 kg (15.0 - 15.7 lbs.)

DTC302ZK
RM 23,748

Cordless Crimper

18V



• ZK: With Carrying Case, Without Charger & Battery



Output Force	120 kN
Ram Stroke Length	42 mm (1-5/8")
Crimping Capacity	Cu: Ø 22.5 mm (400 mm²) Al: Ø 19.5 mm (300 mm²)
Dimensions (L x W x H)	437 x 94 x 349 mm (17-1/4 x 3-11/16 x 13-3/4")
Net Weight (with battery)	7.5 - 7.8 kg (16.5 - 17.2 lbs.)

DTC303ZK
RM 22,000

Cordless Crimper

18V



• ZK: With Carrying Case, Without Charger & Battery



Output Force	60 kN
Ram Stroke Length	31.5 mm (1-1/4")
Crimping Capacity	Cu: Ø 17.5 mm (240 mm²) Al: Ø 17.5 mm (240 mm²)
Dimensions (L x W x H)	401 x 82 x 348 mm (15-3/4 x 3-1/4 x 13-3/4")
Net Weight (with battery)	5.3 - 5.7 kg (11.7 - 12.6 lbs.)

Screwing / Drilling
Stirring
Hammer Drilling / Chiselling
Grinding / Sanding / Polishing
Cutting
Sawing
Milling / Planing
Fastening / Fixing
Cleaning
Lawn Care / Grass Care
Tree Care / Hedge Care
Transportation
Lights
Comfort / Lifestyle
Specialty Tools
Accessory



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cutting

TM001GZ01

RM 1,864

Cordless Multi Tool

40Vmax

Standard Equipment:
Dust Attachment Set (191R02-6),
STARLOCK Segment Saw 85 TMA045 (B-64799),
STARLOCK Cut Saw 32 TMA047 BIM (B-64814),
STARLOCK Cut Saw 32 TMA059 BIM (B-64939),
STARLOCK Sanding Pad 93 TMA078 (B-65115),
Bow Shape Plunge Cut Saw Blade (B-66400),
Abrasive Paper Delta Red Grit 60,100,150 (10 pcs each Grit)

***Recommended batteries**
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

TM001G

VIDEO CLIP
Models and specs may vary by country

BL MOTOR XPT AVT

*** GZ01: Without Charger & Battery**

Oscillations Per Minute (OPM)	10,000 - 20,000
Oscillation Angle	3.6°
Shank Type	Multi Tool: STARLOCK MAX
Dimensions (L x W x H)	326 x 91.5 x 123 mm (12-7/8 x 3-5/8 x 4-7/8")
Net Weight	2.1 - 3.3 kg (4.6 - 7.3 lbs)
Work Amount (approx.)	300 cuts with BL4025 38 mm thick SPF

Come with

TMA059 Plunge Cut Saw Blade 32 (B-64939) TMA047 Bow Shape Plunge Cut Saw Blade 32 (B-64814) MAM001 Bow Shape Plunge Cut Saw Blade (B-66400) TMA045 Segment Saw Blade 85 (B-64799) TMA078 Sanding Pad (B-65115) Abrasive Paper Grit 60 (B-21624) Grit 100 (B-22947) Grit 150 (B-22953)

DTM52RTJX1 | DTM52Z

RM 2,935 RM 1,260

Cordless Multi Tool

18V

DTM52RTJX1: Dust Attachment Set (191R02-6),
Oscillating Multi Tool Accessories and Plastic Case,
TMA059 Plunge Cut Saw Blade 32 (B-64939),
TMA047 Bow Shape Plunge Cut Saw Blade 32 (B-64814),
MAM001 Bow Shape Plunge Cut Saw Blade (B-66400),
TMA045 Segment Saw Blade 85 (B-64799),
TMA078 Sanding Pad (B-65115),
Abrasive Paper Grit 60,100,150 (10pcs each Grit)

*** RTJX1: 1x Rapid Charger, 2x 5.0Ah Battery, 1x Makpac Connector Box Type 3**
*** Z :** Without Charger, Battery & Carrying Case

BL MOTOR XPT AVT

***Not applicable for Z model**

Oscillations Per Minute (OPM)	10,000 - 20,000
Oscillation Angle	Left: 1.8° Right: 1.8° Total: 3.6°
Shank Type	Multi Tool: STARLOCK MAX
Dimensions (L x W x H)	322 x 95 x 126 mm (12-5/8 x 3-3/4 x 5")
Net Weight	1.7 - 2.0 kg (3.7 - 4.4 lbs)
Work Amount (approx.)	320 cuts with BL1860B 38 mm thick SPF

For DTM52RTJX1 only

TMA059 Plunge Cut Saw Blade 32 Part No. B-64939 RM 87.10 TMA047 Bow Shape Plunge Cut Saw Blade 32 Part No. B-64814 RM 99.10 MAM001 Bow Shape Plunge Cut Saw Blade Part No. B-66400 RM 100.40 TMA045 Segment Saw Blade 85 Part No. B-64799 RM 148.20 TMA078 Sanding Pad Part No. B-65115 RM 83.10 Abrasive Paper Grit 60 Part No. B-21624 RM 24.40 Grit 100 Part No. B-22947 RM 23.70 Grit 150 Part No. B-22953 RM 23.50

DTM51RFEX8 | DTM51Z

RM 2,243 RM 1,093

Cordless Multi Tool

18V

Standard Equipment:
DTM51RFEX8: Oscillating multi tool accessories,
Tool Box

*** RFEX8: 1x Rapid Charger, 2x 3.0Ah Battery**
*** Z :** Without Charger, Battery & Carrying Case

BL MOTOR XPT AVT

***Not applicable for Z model**

Oscillations Per Minute (OPM)	6,000 - 20,000
Oscillation Angle	Left: 1.6° Right: 1.6° Total: 3.2°
Dimensions (L x W x H)	340 x 80 x 122 mm (13-3/8 x 3-1/8 x 4-13/16")
Net Weight	2.0 - 2.4 kg (4.4 - 5.3 lbs)
Work Amount (approx.)	40 pcs with BL1850B Cutting

For DTM51RFEX8 only

Bow Shape Plunge Cut Saw Blade 32 Part No. B-64814 RM 99.10 Segment Saw Blade 85 Part No. B-64799 RM 148.20 Sanding Pad Part No. B-65115 RM 83.10

TM30DZ

RM 506

Cordless Multi Tool

12Vmax

Standard Equipment:
Hex Wrench

*** DZ : Without Charger, Battery & Carrying Case**

BL MOTOR XPT AVT

***Not applicable for Z model**

Oscillations Per Minute (OPM)	6,000 - 20,000
Oscillation Angle	Left: 1.6° Right: 1.6° Total: 3.2°
Dimensions (L x W x H)	277 x 65 x 98 mm (10-7/8 x 2-9/16 x 3-7/8")
Net Weight	1.1 - 1.3 kg (2.3 - 2.9 lbs)
Continuous Usage Time (approx.)	16 min with BL1021B Plunge cutting wood

TM3010CX6

RM 1,071

Multi Tool
• Toolless clamp system for fast accessory installation.

Continuous Rating Input 320 W
Strokes Per Minute (SPM) 6,000 -20,000
Dimensions (L x W x H) 283 x 68 x 87 mm
(11-1/8 x 2-11/16 x 3-7/16")
Net Weight 1.6 - 1.7 kg (3.7 - 3.9 lbs)
Power Supply Cord 2.5 m (8.2 ft)

Standard Equipment:
Multi Tool Plunge Cut Saw Blade 32,
Segment Saw Blade 85,
Sanding Pad

VIDEO CLIP
Models and specs may vary by country

TM3010C

Come with

Bow Shape Plunge Cut Saw Blade 32 Segment Saw Blade 85 Sanding Pad

TM3000C

RM 664

Multi Tool
• Powerful 320 W motor with improved performance.

Continuous Rating Input 320 W
Strokes Per Minute (SPM) 6,000 - 20,000
Dimensions (L x W x H) 275 x 64 x 92 mm
(10-7/8 x 2-1/2 x 3-5/8")
Net Weight 1.4 - 1.5 kg (3.2 - 3.3 lbs)
Power Supply Cord 5.0 m (16.4 ft)

Standard Equipment:
Hex Wrench

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Sawing



LS003GZ 305 mm (12")

RM 5,662

Cordless Slide Compound Miter Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

TCT Saw Blade (B-67452), Dust Bag,
Triangular Rule, Vertical Vise, Hex Wrench

• GZ: Without Charger & Battery



Blade Diameter	305 mm (12")
Hole Diameter	25.4 mm (1")
Angle	Miter: 60°L / 60°R Bevel: 48°L / 48°R
Max Cutting Capacity	0° Miter: 107x363mm (4-1/4x14-1/4") 45° Miter, L/R: 107x255mm (4-1/4x10")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	898 x 690 x 725 mm (35-1/4 x 27-1/4 x 28-1/2")
Net Weight	30.5 - 31.1 kg (67.2 - 68.6 lbs)
Work Amount (approx.)	70 cuts with BL4040 Melapi thickness 90 mm x width 300 mm at 90° slide cutting

LS004GZ 260 mm (10-1/4")

RM 4,998

Cordless Slide Compound Miter Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

TCT Saw Blade, Dust Bag, Triangular Rule,
Vertical Vise, Hex Wrench

• GZ: Without Charger & Battery



Blade Diameter	260 mm (10-1/4")
Hole Diameter	25.4 mm (1")
Angle	Miter: 60°L / 60°R Bevel: 48°L / 48°R
Max Cutting Capacity	0° Miter: 91 x 279 mm (3-5/8 x 11") 45° Miter, L/R: 91x197 mm (3-5/8 x 7-3/4")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	805 x 644 x 660 mm (31-1/4 x 25-3/8 x 26")
Net Weight	26.6 - 27.2 kg (58.6 - 60.0 lbs)
Work Amount (approx.)	110 cuts with BL4040 Melapi thickness 60 mm x width 300 mm at 90° slide cutting

LS002GZ 216 mm (8-1/2")

RM 4,437

Cordless Slide Compound Miter Saw

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah



Standard Equipment:

Efficut TCT Saw Blade (E-07010), Dust Bag,
Triangular Rule, Vertical Vise, Hex Wrench

• GZ: Without Charger & Battery



Blade Diameter	216 mm (8-1/2")
Hole Diameter	25.4 mm (1")
Angle	Miter: 60°L / 60°R Bevel: 48°L / 48°R
Max Cutting Capacity	(Bevel 45°L / Miter 45°LR) 50 x 220 mm (2 x 8-5/8") (Bevel 45°L / Miter 0°) 50 x 312 mm (2 x 12-1/4") (Bevel 45°R / Miter 45°LR) 30 x 220 mm (1-3/16 x 8-5/8") (Bevel 45°R / Miter 0°) 30 x 312 mm (1-3/16 x 12-1/4") (Bevel 0° / Miter 45°LR) 70 x 220 mm (2-3/4 x 8-5/8") (Bevel 0° / Miter 0°) 70 x 312 mm (2-3/4 x 12-1/4")
No Load Speed (RPM)	4,800
Dimensions (L x W x H)	702 x 551 x 557 mm (27-5/8 x 21-3/4 x 22")
Net Weight	16.4 - 17.0 kg (36.2 - 37.6 lbs)
Work Amount (approx.)	170 cuts with BL4040 at 90° slide cutting Melapi thickness 60 mm x width 250 mm

LS1219L 305 mm (12")


RM 5,231

Slide Compound Miter Saw

• Dual dust collection port.

Standard Equipment:

TCT Saw
Blade (B-67474),
Vertical Vise, Hex Wrench,
Triangular Rule, Dust Bag



Continuous Rating Input	1,800 W
Hole Diameter	European Countries: 30 mm (1-3/16") Others: 25.4 mm (1")
Bevel Angle	48°L / 48° R
Miter Angle	60°L / 60° R
Max Cutting Capacity	Crown Molding Vertically Nested: 203 mm (8") Crown Molding Lying Flat: 320 mm (12-5/8") Base Board Against Fence: 171 mm (6-3/4") Base Board Lying Flat: 416 mm (16-3/8")
No Load Speed (RPM)	3,200
Dimensions (L x W x H)	898 x 664 x 725 mm (35-1/4 x 26-1/8 x 28-1/2")
Net Weight	29.5 kg (65.0 lbs)
Power Supply Cord	2.5 m (8.2 ft)



LS1019L 260 mm (10-1/4")

RM 4,054

Slide Compound Miter Saw

• Large turn base supports workpiece securely for increased stability.

Standard Equipment:

EFFICUT Saw Blade, Dust Bag,
Triangular Rule, Vertical Vise, Hex Wrench



Continuous Rating Input	1,510 W
Bevel Angle	48°L / 48° R
Miter Angle	60°L / 60° R
Max Cutting Capacity	Crown Molding Vertically Nested: 168 mm (6-5/8") Crown Molding Lying Flat: 248 mm (9-3/4") Base Board Against Fence: 133 mm (5-1/4") Base Board Lying Flat: 305 mm (12")
No Load Speed (RPM)	3,200
Dimensions (L x W x H)	805 x 644 x 660 mm (31-3/4 x 25-3/8 x 26")
Net Weight	26.3 kg (57.9 lbs)
Power Supply Cord	2.5 m (8.2 ft.)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Sawing

LS1110F

255 - 260 mm (10 - 10-1/4")

RM 2,421

Slide Compound Miter Saw

- LED job light with cut line guide function.



Continuous Rating Input	1,450 W
Wheel Diameter	255 - 260 mm (10 - 10-1/4")
Miter Angle	47° L / 47° R
Bevel Angle	47° L / 20° R
Max Cutting Capacity	Miter 0°, Bevel 0° 91 x 310 mm (3-5/8 x 12-1/4") Miter 45°, L/R, Bevel 0° 91 x 220 mm (3-5/8 x 8-5/8")
No Load Speed (RPM)	4,500
Dimensions (L x W x H)	745 x 497 x 565 mm (29-1/4 x 19-1/2 x 22-1/4")
Net Weight	16.4 kg (36.2 lbs)
Power Supply Cord	2.0 m (6.6 ft)

Standard Equipment:
TCT Saw Blade (D-77338), Vertical Vise, Dust Bag, Hex Wrench





LS1018L

260 mm (10-1/4")

RM 2,878

Slide Compound Saw

- Large cutting capacity in a compact design and less weight.



Continuous Rating Input	1,430 W
Miter Angle	47°L / 60° R
Bevel Angle	45°L / 45° R
Max Cutting Capacity	90°: 91 x 310 mm (3-5/8 x 12-13/64") 45°: 91 x 220 mm (3-5/8 x 8-5/8")
No Load Speed (RPM)	4,300
Dimensions (L x W x H)	825 x 536 x 633 mm (32-1/2 x 21-1/8 x 25")
Net Weight	20.6 kg (45.4 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:
TCT Saw Blade (B-14277), Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder assembly



LS0714

190 mm (7-1/2")

RM 2,448

Slide Compound Saw

- Compact and lightweight for increased jobsite portability.



Continuous Rating Input	1,010 W
Miter Angle	47°L / 57° R
Bevel Angle	45°L / 5° R
Max Cutting Capacity	90°: 52 x 300 mm (2-1/16 x 11-3/4") 45°: 52 x 212 mm (2-1/16 x 8-3/8")
No Load Speed (RPM)	6,000
Dimensions (L x W x H)	670 x 430 x 458 mm (26-3/8 x 17 x 18")
Net Weight	13.1 kg (28.9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:
Carbide-Tipped Saw Blade, Dust Bag, Holder Set, Vertical Vise, Triangular Rule



LS1040

260 mm (10-1/4")

RM 1,545

Compound Miter Saw

- Powerful 1,650W direct drive motor for improved performance.



Continuous Rating Input	1,650 W
Miter Angle	45°L / 52° R
Bevel Angle	45°L
Max Cutting Capacity	90°: 90.5 x 95 mm (3-9/16 x 3-3/4") 45°: 90.5 x 67 mm (3-9/16 x 2-5/8")
No Load Speed (RPM)	4,600
Dimensions (L x W x H)	530 x 476 x 532 mm (20-7/8 x 18-3/8 x 21")
Net Weight	12.4 kg (27.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:
Socket Wrench, Dust Bag, Holder Set, Vertical Vise, Triangular Rule



LH1201FL

305 mm (12")

RM 3,675

Table Top Miter Saw

- 2 tools in 1 for convenience and versatility.



Continuous Rating Input	1,650 W
Miter Angle	47°L / 52° R
Bevel Angle	45° L
Max Cutting Capacity	90°: 62 x 200 mm (2-7/16 x 7-7/8") 90°: 95 x 155 mm (3-3/4 x 6-1/8") 45° Miter, L/R: 62 x 135 mm (2-7/16 x 5-5/16") 45° Miter, L/R: 95 x 110 mm (3-3/4 x 4-5/16") 90°, Table saw: 52 mm (2-1/16")
No Load Speed (RPM)	3,800
Dimensions (L x W x H)	610 x 535 x 692 mm (24 x 21 x 27-1/4")
Table Size (W x L)	307 x 465 mm (12-1/8 x 18-1/4")
Net Weight	20.9 kg (46.1 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment: TCT Saw Blade, Vertical Vise, Dust Bag, Rip Fence, Ring, Triangular Rule, Push Stick, Blade Cover, Socket Wrench, Holder Set



2712

315 mm (12-3/8")

RM 3,045

Table Saw

- Powerful 2,000W motor for fast cutting.



Max Cutting Capacity	90°: 85 mm (3-3/8") 45°: 58 mm (2-1/4")
Blade Diameter	315 mm (12-3/8")
No Load Speed (RPM)	50 Hz: 2,950 60 Hz: 3,400
Bevel Capacity	0° - 45°
Dimensions (L x W x H)	1,670 x 700 x 810 mm (65-3/4 x 27-1/2 x 32")
Net weight	54 kg (118.9 lbs)
Power supply cord	3.0 m (9.8 ft)

Standard Equipment:
Carbide-Tipped Saw Blade, Rip Fence, Miter Gauge, Wrenches, Push Stick, Ring



2704

260 mm (10-1/4")

RM 6,300

Table Saw

- Electric brake for increased productivity and operator safety.



Continuous Rating Input	1,650 W
Max Cutting Capacity	90°: 93 mm (3-5/8") 45°: 64 mm (2-1/2")
No Load Speed (RPM)	4,800
Dimensions (L x W x H)	665 x 766 x 344 mm (26-1/4 x 30-1/4 x 13-1/2")
Net Weight	35.6 - 37.3 kg (78.5 - 82.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:
Ring, Rip Fence, Miter Gauge, Wrenches, Push Stick, Carbide-Tipped Saw Blade (B-17734)



WHILE STOCK LAST



MLT100

260 mm (10-1/4")

RM 3,150

Table Saw

- Right and rear extension table enables greater cutting capacity.



Continuous Rating Input	1,500 W
Max Cutting Capacity	90°: 91 mm (3-9/16") 45°: 63 mm (2-1/2")
No Load Speed (RPM)	4,300
Dimensions (L x W x H)	726 x 984 x 333 mm (28-1/2 x 38-3/4 x 13-1/8")
Net Weight	34.1 kg (75.2 lbs)
Power Supply Cord	2.5 m (8.2ft)

Standard Equipment:
Carbide-Tipped Saw Blade, Rip Fence, Wrenches, Miter Gauge, Push Stick, Triangular Rule



HS013GZ 415 mm (16-5/16")

RM 5,500

Cordless Circular Saw

40Vmax



*Recommended batteries 4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries



NEW

Standard Equipment:
TCT Saw Blade, Hex Wrench,
Joint, Protect Stand

• GZ: Without Charger & Battery



Blade Diameter	415 mm (16-5/16")
Max Cutting Capacity	0°: 158 mm (6-1/4") 45°: 106 mm (4-3/16")
No Load Speed (RPM)	2,100
Dimensions (L x W x H)	606 x 233 x 476 mm (23-7/8 x 9-1/8 x 18-3/4")
Net Weight	11.0 - 12.0 kg (24.3 - 26.5 lbs)
Work Amount (approx.)	75 cuts with BL4050F Melapi thickness 150 mm width 300 mm Bevel angle 0°

HS011GT201 | HS011GZ 260 mm (10-1/4") / 270 mm (10-5/8")

RM 6,196 | RM 2,878

Cordless Circular Saw

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah



HS011GT201
WHILE STOCK LAST

Standard Equipment:
TCT Saw Blade (E-07733), Sub Base, Hex Wrench

• GT201: 1x Fast Charger, 2x 5.0Ah Battery
• GZ : Without Charger & Battery



Blade Diameter	260 - 270 mm (10-1/4 - 10-5/8")
Max Cutting Capacity	0°: 97 - 101 mm (3-13/16 - 4") 45°: 68 - 71 mm (2-11/16 - 2-13/16") 60°: 48 - 51 mm (1-7/8 - 2")
No Load Speed (RPM)	3,500
Dimensions (L x W x H)	453 x 196 x 336 mm (17-7/8 x 7-3/4 x 13-1/4")
Net Weight	5.5 - 6.7 kg (12.1 - 14.8 lbs)
Work Amount (approx.)	40 cuts with BL4050F Sawing with EFFICUT blade 0° cut Melapi Wood (thickness 90 mm, width 1,000 mm)

HS009GZK | HS009GZ 235 mm (9-1/4")

RM 2,684 | RM 2,684

Cordless Circular Saw

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah



HS009GZK
WHILE STOCK LAST

Standard Equipment:
TCT Saw Blade (E-01959), Sub Base, Hex Wrench

• GZK : With Carrying Case, Without Charger & Battery
• GZ : Without Charger & Battery



Blade Diameter	235 mm (9-1/4")
Max Cutting Capacity	0°: 85 mm (3-3/8") 45°: 61 mm (2-3/8") 60°: 44 mm (1-3/4")
No Load Speed (RPM)	4,000
Dimensions (L x W x H)	413 x 196 x 316 mm (16-1/4 x 7-3/4 x 12-1/2")
Net Weight	5.1 - 5.7 kg (11.2 - 12.6 lbs)
Work Amount (approx.)	120 pcs with BL4050F Sawing with EFFICUT blade 0° cut Oak wood thickness 80 mm width 300 mm

HS004GM201 | HS004GZ 190 mm (7-1/2") / 185 mm (7-1/4")

RM 4,898 | RM 2,245

Cordless Circular Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
TCT Saw Blade (B-62022), Dust Nozzle,
Hex Wrench, Guide Rule

• GM201: 1x Fast Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 4
• GZ : Without Charger, Battery & Carrying Case



Blade Diameter	190 mm (7-1/2") 185 mm (7-1/4")
Max Cutting Capacity	90°: 62.5 / 60 mm (2-7/16" / 2-3/8") 45°: 44.5 / 43 mm (1-3/4" / 1-11/16") 48°: 42 / 41 mm (1-5/8" / 1-5/8")
No Load Speed (RPM)	6,000
Dimensions (L x W x H)	322 x 210 x 290 mm (12-5/8 x 8-1/4 x 11-3/8")
Net Weight	4.4 - 4.7 kg (9.7 - 10.4 lbs)
Work Amount (approx.)	145 pcs Melapi thickness 60 mm width 300 mm 31 pcs SPF 2 x 10 with BL4040

HS012GZ 165 mm (6-1/2")

RM 1,684

Cordless Circular Saw

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
TCT Saw Blade (B-63018), Guide Rule, Dust Nozzle, Hex Wrench

• GZ: Without Charger & Battery



Wheel Diameter	165 mm (6-1/2")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	0°: 57 mm (2-1/4") 45°: 41 mm (1-5/8")
No Load Speed (RPM)	5,200
Max Output	1,300 W
Dimensions (L x W x H)	352 x 157 x 246 mm (13-7/8 x 6-3/16 x 9-11/16")
Net Weight	3.2 - 4.4 kg (7.1 - 9.7 lbs)
Work Amount (approx.)	110 cuts with BL4025 Sawing with EFFICUT blade, bevel angle: 0° Melapi thickness 50 mm width 300 mm

Sawing

DHS661Z 165 mm (6-1/2")
RM 1,692

Cordless Circular Saw

18V



Standard Equipment:
TCT Saw Blade (B-63018), Hex Wrench,
Rip Fence (Guide Rule), Dust Nozzle

• Z : Without Charger, Battery & Carrying Case



Blade Diameter	165 mm (6-1/2")
Hole Diameter	15.88 mm (5/8") 20 mm (13/16")
Max Cutting Capacity	90°: 57 mm (2-1/4") 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
No Load Speed (RPM)	5,000
Max Output	680 W
Dimensions (L x W x H)	270 x 186 x 250 mm (10-5/8x7-3/8 x 9-7/8")
Net Weight	2.9 - 3.2 kg (6.4 - 7.1 lbs)
Work Amount (approx.)	200 pcs with BL1850B Sawing with EFFICUT blade, 90° cut SPF 2 x 10 (Thickness 38mm, Width 89 mm)

DHS680RMJ | DHS680RFJ | DHS680Z 165 mm (6-1/2")
RM 2,571 | RM 2,385 | RM 1,345

Cordless Circular Saw

18V




Opposite Handling
Cut left side of material



Standard Equipment:
TCT Saw Blade (B-63018), Hex Wrench,
Rip Fence (Guide Rule)

- RMJ: 1x Rapid Charger, 2x 4.0Ah Battery,
1x Makpac Connector Box Type 3
- RFJ: 1x Rapid Charger, 2x 3.0Ah Battery,
1x Makpac Connector Box Type 3
- Z : Without Charger, Battery & Carrying Case



Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	90°: 57 mm (2-1/4") 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
No Load Speed (RPM)	5,000
Dimensions (L x W x H)	350 x 170 x 238 mm (13-3/4 x 6-11/16 x 9-3/8")
Net weight	3.0 - 3.3 kg (6.6 - 7.3 lbs)
Work Amount (approx.)	170 pcs with BL1850B Sawing with Standard Blade, 90° cut SPF 2 x 10 (Thickness 38mm, Width 89 mm)

HS301DWAE | HS301DZ 85 mm (3-3/8")
RM 1,129 | RM 506

Cordless Circular Saw

12Vmax



Standard Equipment:
TCT Saw Blade (B-14607), Hex Wrench

- DWAE: 1x Standard Charger, 2x 2.0Ah Battery
- DZ : Without Charger, Battery & Carrying Case



Blade Diameter	85 mm (3-3/8")
Max Cutting Capacity	90°: 25.5 mm (1") 45°: 16.5 mm (5/8")
No Load Speed (RPM)	1,500
Dimensions (L x W x H)	313 x 170 x 155 mm (12-3/8 x 6-11/16 x 6-1/8")
Net Weight	1.6 - 1.7 kg (3.5 - 3.8 lbs)
Work Amount (approx.)	140 cuts with BL1021B Sawing SPF 1"x4" 0° cut

HS6600 165 mm (6-1/2")
RM 682

Circular Saw

- More compact and lightweight design.



Standard Equipment:
Rip Fence (Guide Rule),
TCT Saw Blade (B-02917), Hex Wrench



Continuous Rating Input	1,050 W
Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	90°: 54.5 mm (2-1/8") 45°: 37.5 mm (1-1/2")
No Load Speed (RPM)	5,200
Dimensions (L x W x H)	296 x 230 x 243 mm (11-5/8 x 9 x 9-9/16")
Net Weight	3.5 kg (7.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

HS7010 185 mm (7-1/4") / 190 mm (7-1/2")
RM 800

Circular Saw

- High Power and increased motor-burnout resistance.



Standard Equipment:
TCT Saw Blade, Rip Fence (Guide Rule),
Hex Wrench



Continuous Rating Input	1,600 W
Blade Diameter	185 mm 190 mm (7-1/4" 7-1/2")
Max Cutting Capacity	90°: 65 mm 67 mm (2-9/16" 2-5/8") 45°: 44 mm 45 mm (1-3/4" 1-3/4")
No Load Speed (RPM)	5,500
Dimensions (L x W x H)	300 x 240 x 261 mm (11-3/4 x 9-1/2 x 10-1/4")
Net Weight	4.0 kg (8.9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

HS7600 185 mm (7-1/4")
RM 757

Circular Saw

- Powerful 1,200 W motor.



Standard Equipment:
TCT Saw Blade, Rip Fence (Guide Rule),
Hex Wrench



Continuous Rating Input	1,200 W
Blade Diameter	185 mm (7-1/4")
Max Cutting Capacity	90°: 64 mm (2-1/2") 45°: 42 mm (1-5/8")
No Load Speed (RPM)	5,200
Dimensions (L x W x H)	309 x 234 x 255 mm (12-1/8 x 9-1/4 x 10")
Net Weight	3.8 kg (8.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

5806B 185 mm (7-1/4")
RM 735

Circular Saw

- Powerful motor for smooth operation even in heavy duty cutting.



Standard Equipment:
Carbide-Tipped Saw Blade, Hex Wrench,
Rip Fence (Guide Rule)



Continuous Rating Input	1,050 W
Blade Diameter	185 mm (7-1/4")
Max Cutting Capacity	90°: 66 mm (2-5/8") 45°: 44 mm (1-11/16")
No Load Speed (RPM)	5,200
Overall Length	282 mm (11-1/8")
Net Weight	3.5 kg (7.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

5008MG 210 mm (8-1/4")
RM 1,071

153

Circular Saw

• **Powerful 1,800 W motor for proven performance.**



Standard Equipment:
TCT Saw Blade (D-29066), Hex Wrench,
Rip Fence (Guide Rule)



Continuous Rating Input	1,800 W
Blade Diameter	210 mm (8-1/4")
Max Cutting Capacity	90°: 75.5 mm (3") 45°: 57 mm (2-1/4") 50°: 51.5 mm (2")
No Load Speed (RPM)	5,200
Dimensions (L x W x H)	332 x 243 x 277 mm (13-1/8 x 9-9/16 x 10-7/8")
Net Weight	4.8 kg (10.6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

N5900B 235 mm (9-1/4")
RM 945

153

Circular Saw

• **High power 2,000 W to rip through most materials.**



Standard Equipment:
Carbide-Tipped Saw Blade,
Rip Fence (Guide Rule), Wrench 13



Continuous Rating Input	2,000 W
Max Cutting Capacity	90°: 85 mm (3-3/8") 45°: 60 mm (2-3/8") 50°: 53 mm (2-1/16")
Blade Diameter	235 mm (9-1/4")
No Load Speed (RPM)	4,100
Overall Length	380 mm (15")
Net Weight	6.8 kg (14.8 lbs)
Power Supply Cord	2.5m (8.2ft)

HS0600 260 mm (10-1/4") / 270 mm (10-5/8")
RM 1,890

153

Circular Saw

• **Powerful 2,100 W motor.**



Standard Equipment:
TCT Saw Blade, Rip Fence (Guide Rule),
Hex Wrench



Continuous Rating Input	2,000 W
Blade Diameter	260 mm 270 mm (10-1/4" 10-5/8")
Max Cutting Capacity	90°: 97 mm 101mm (3-13/16" 4") 45°: 68/71 mm (2-11/16" 2-13/16") 50°: 61 mm 63mm (2-3/8" 2-1/2")
No Load Speed (RPM)	4,300
Dimensions (L x W x H)	418 x 273 x 324 mm (16-1/2 x 10-3/4 x 12-3/4")
Net Weight	6.9 kg (15.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

5402 415 mm (16-5/16")
RM 2,782

153

Circular Saw

• **Smooth cutting at high rotational speed.**



Standard Equipment:
Combination Saw Blade, Hex Wrench,
Rip Fence (Guide Rule)



Blade Diameter	415 mm (16-5/16")
Max Cutting Capacity	90°: 157 mm (6-3/16") 45°: 106 mm (4-3/16")
No Load Speed (RPM)	2,200
Overall Length	615 mm (24-1/4")
Net Weight	12.9 kg (28.4 lbs)
Power Supply Cord	5.0 m (16.4 ft)

SP001GZ02 165 mm (6-1/2")
RM 2,867

Cordless Plunge Cut Saw

40Vmax



*Recommended batteries 2.5Ah, 4.0Ah,
4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
TCT Saw Blade (B-57364), Hex Wrench

• GZ02: With 1x Makpac Connector Box Type 4,
Without Charger & Battery



Blade Diameter	165 mm (6-1/2")
Hole Diameter	20 mm (13/16")
Bevel Capacity	-1 - 48°
Max Cutting Capacity	0°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed (RPM)	2,500 - 4,900
Dimensions (L x W x H)	347 x 221 x 271 mm (13-5/8 x 8-3/4 x 10-5/8")
Net Weight	4.4 - 5.0 kg (9.7 - 11.0 lbs)
Work Amount (approx.)	150 cuts with BL4040 Kitchen board (Laminated wood) thickness 40 mm x width 600 mm 0° cutting

DSP600Z 165 mm (6-1/2")
RM 2,520

Cordless Plunge Cut Saw

18V x2



Standard Equipment:
TCT Saw Blade (B-57364), Hex Wrench

• Z: Without Charger & Battery



Blade Diameter	165 mm (6-1/2")
Bevel Capacity	-1° - 48°
Max Cutting Capacity	90°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed (RPM)	2,500 - 6,300
Dimensions (L x W x H)	346 x 241 x 272 mm (13-5/8 x 9-1/2 x 10-3/4")
Net Weight	4.4 - 5.1 kg (9.8 - 11.2 lbs)
Work Amount (approx.)	48 cuts with BL1850B x2 Melamine board 32 mm (thick) x 1000 mm (length)

SP6000J 165 mm (6-1/2")
RM 2,028

303

Plunge Cut Circular Saw

• **Built-in current limiter helps prevent motor burnout.**



Standard Equipment:
TCT Saw Blade (B-07353), Hex Wrench



Continuous Rating Input	1,300 W
Blade Diameter	165 mm (6-1/2")
Max Cutting Capacity	90°: 56 mm (2-3/16") 45°: 40 mm (1-9/16") 48°: 38 mm (1-1/2")
No Load Speed (RPM)	2,000 - 5,800
Dimensions (L x W x H)	341 x 225 x 250 mm (13-3/8 x 8-7/8 x 9-7/8")
Net Weight	4.1 kg (9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

LB1200F
RM 4,200

Band Saw

• **High/ low speed selection for excellent results in both hard and soft wood.**



Standard Equipment:
Band Saw Blades,
Rip Fence, Miter Gauge,
Push Stick, Nozzle,
Hex Wrench,
Band Saw Stand



Continuous Rating Input	900 W
Capacity	Thickness of cut: 165 mm (6-1/2") Throat: 305 mm (12")
Blade Speed	50 Hz (m/min) High: 800 Low: 400 60 Hz (m/min) High: 1,000 Low: 500
Dimensions (L x W x H)	615 x 775 x 1,600 mm (24-1/4 x 30-1/2 x 63")
Net Weight	82 kg (181.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
SINCE 1915

Sawing

JV002GZ

RM 1,517

Cordless Jig Saw

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Dust Nozzle Assembly (122C71-6),
Kerf Board (415524-7), Hex Wrench (783202-0),
Jig Saw Blade Set (No. B10, B22, BR13)

• GZ: Without Charger & Battery



Max Output	800 W
Capacity	Wood: 135 mm (5-5/16") Mild steel: 10 mm (3/8") Aluminum: 20 mm (13/16")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	0 - 3,500
Bevel Range	0 - 45°
Dimensions (L x W x H)	272 x 84 x 208 mm (10-3/4 x 3-5/16 x 8-3/16")
Net Weight	2.7 - 3.0 kg (6.0 - 6.6 lbs)
Work Amount (approx.)	186 pcs with BL4025 sawing with Blade B-10, max orbital mode MDF Thickness 24 mm x width 300 mm

JV001GZ

RM 1,378

Cordless Jig Saw

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Anti-Splintering Device, Hex Wrench 4, Jig Saw Blade Set
(No. BR-10, BR-13, B-22, 2pcs each)

• GZ: Without Charger & Battery



Max Output	700 W
Capacity	Wood: 135 mm (5-5/16") Mild steel: 10 mm (3/8") Aluminum: 20 mm (13/16")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Bevel Range	0 - 45°
Dimensions (L x W x H)	269 x 84 x 189 mm (10-5/8 x 3-5/16 x 7-7/16")
Net Weight	2.6 - 2.9 kg (5.7 - 6.4 lbs)
Work Amount (approx.)	230 pcs with BL4040, sawing with Blade B-10 with max orbital mode MDF Thickness 24 mm x width 300 mm

DJV182RFE | DJV182Z

RM 2,457

RM 1,418

Cordless Jig Saw

18V



Standard Equipment:
Jig Saw Blade Set
(No. BR-10, BR-13, B-22, 2 pcs each),
Cover Plate, Anti-Splintering Device,
Hex Wrench

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case



Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Dimensions (L x W x H)	266 x 77 x 208 mm (10-1/2 x 3 x 8-3/16")
Net Weight	2.4 - 2.7 kg (5.2 - 5.9 lbs)
Work Amount (approx.)	266 pcs with BL1850B Sawing with Blade B-10 Plywood thickness 12 mm x length 300 mm

DJV181Z

RM 1,418

Cordless Jig Saw

18V



Standard Equipment:
Jig Saw Blade Set
(No. BR-10, BR-13, B-22, 2 pcs each),
Cover Plate, Anti-Splintering Device,
Hex Wrench

• Z: Without Charger & Battery



Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 3,500
Dimensions (L x W x H)	298 x 77 x 189 mm (11-3/4 x 3 x 7-7/16")
Net Weight	2.3 - 2.6 kg (5.0 - 5.7 lbs)
Work Amount (approx.)	266 pcs with BL1850B Sawing with Blade B-10 Plywood thickness 12 mm x length 300 mm

DJV180RFJ | DJV180Z

RM 2,214

NEW

RM 1,167

Cordless Jig Saw

18V



Standard Equipment:
Jig Saw Blade Set (No. BR-10, BR-13, B-22, 2pcs each),
Cover Plate, Anti-Splintering Device, Hex Wrench

• RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
• Z : Without Charger & Battery



Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	0-2,600
Dimensions (L x W x H)	257 x 73 x 208 mm (10-1/8 x 2-7/8 x 8-3/16")
Net Weight	2.7 - 3.0 kg (6.0 - 6.7 lbs)
Work Amount (approx.)	216 pcs with BL1850B Sawing with Blade B-10 Plywood thickness 12 mm x length 300 mm

* All recommended selling price (RSP) shown are for reference only (exclude SST).

DJV185Z

RM 1,040

Cordless Jig Saw

18V



Standard Equipment:

Dust Nozzle, Cover Plate, Dust Cover, Hex. Wrench 3,
Jigsaw Blade (No.B-10, No.B-22, No.BR-13, 2 pcs each)

• Z: Without Charger & Battery



Capacity	Wood: 135 mm (5-5/16") Mild steel: 10 mm (3/8") Aluminum: 20 mm (25/32")
Length Of Stroke	23 mm (7/8")
Strokes Per Minute (SPM)	800 - 3,000
Dimensions (L x W x H)	259 x 77 x 183 mm (10-1/4 x 3 x 7-1/4")
Net Weight	2.0 - 2.3 kg (4.4 - 5.1 lbs)
Work Amount (approx.)	175 pcs with BL1860B sawing with Blade B-10 with max orbital mode MDF thickness 24 mm x width 300 mm

DJV184RFJ | DJV184Z

RM 2,081

RM 1,031

Cordless Jig Saw

18V



Standard Equipment:

Jig Saw Blade (B-50),
Hex Wrench, Cover Plate

• RFJ: 1x Rapid Charger, 2x 3.0Ah Battery, 1x Makpac Connector Box
• Z: Without Charger, Battery & Carrying Case



Capacity	Wood: 135 mm (5-5/16") Mild steel: 10 mm (3/8") Aluminum: 20 mm (25/32")
Length Of Stroke	23 mm (7/8")
Strokes Per Minute (SPM)	0 - 3,000
Dimensions (L x W x H)	259 x 77 x 205 mm (10-1/4 x 3 x 8-1/8")
Net Weight	2.1 - 2.4 kg (4.6 - 5.3 lbs)
Work Amount (approx.)	165 pcs with BL1860B Sawing with Blade B-10 with Max Orbital mode MDF thickness 24 mm x width 300 mm

DJV186
Cordless Jig Saw



Change lever for 3 orbital
settings and straight
cutting optimum cutting
action can be selected simply
by turning the lever.

Stroke length: 18mm

Blower function




Variable speed control
by trigger makes it easier
to align with cutting lines.



Connectable to a
vacuum cleaner

Rigid
aluminum
base



DJV186Z

RM 290

Cordless Jig Saw

18V



NEW

Standard Equipment:

Jig Saw Blade (No. B-10), Hex Wrench

• Z: Without Charger & Battery



Capacity	Wood: 65 mm (2-9/16") Mild steel: 6 mm (1/4") Aluminum: 10 mm (3/8")
Length Of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	0 - 2,900
Dimensions (L x W x H)	241 - 257 x 81 x 196 mm (9-1/2 - 10-1/8 x 3-3/16 x 7-3/4")
Net Weight	1.9 - 2.2 kg (4.2 - 4.9 lbs)
Work Amount (approx.)	155 pcs with BL1860B 48 pcs with BLB182 sawing with BLB182 with max orbital mode MDF thickness 24 mm x width 300 mm

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
int

Sawing

JV103DZ

RM 945

Cordless Jig Saw

12Vmax



VIDEO CLIP
Models and specs
may vary by country



Standard Equipment:
Jig Saw Blade B-10 (A-85628),
Hex Wrench

• DZ : Without Charger & Battery



Max Cutting Capacity at 90°	Wood: 90 mm (3-1/2") Aluminum: 20 mm (13/16") Mild Steel: 10 mm (3/8")
Length of Stroke	23 mm (7/8")
Strokes Per Minute (SPM)	800 - 3,000
Dimensions (L x W x H)	237 x 76 x 206 mm (9-3/8 x 3 x 8-1/8")
Net Weight	1.9 - 2.0 kg (4.1 - 4.4 lbs)
Work Amount (approx.)	90 pcs with BL1021B Sawing plywood 300 mm long 12 mm thickness

JV101DWAE | JV101DZ

RM 1,089

RM 464

Cordless Jig Saw

12Vmax



Standard Equipment:
Jig Saw Blade B-10 (A-85628),
Hex Wrench

• DWAE: 1x Standard Charger, 2x 2.0Ah Battery
• DZ : Without Charger, Battery & Carrying Case



Max Cutting Capacity at 90°	Wood: 65 mm (2-9/16") Aluminum: 4 mm (5/32") Mild Steel: 2 mm (1/16")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	0-2,900
Dimensions (L x W x H)	232 x 76 x 196 mm (9-1/8 x 3 x 7-3/4")
Net Weight	1.8 - 1.9 kg (3.9 - 4.3 lbs)
Work Amount (approx.)	60 pcs with BL1021B Sawing Plywood 300 mm long 12 mm thickness

4350CT

RM 935

419

Jig Saw

• 3 orbital settings plus straight
cutting with a powerful
720 W motor.



Standard Equipment:
Hex Wrench, Cover Plate,
Anti-Splintering Device, Jig Saw Blade Set
(No. B-10, BR-13, B-22, 2pcs each)



Continuous Rating Input	720 W
Capacity	Wood: 135 mm (5-5/16") Steel: 10 mm (3/8")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	800 - 2,800
Dimensions (L x W x H)	236 x 73 x 207 mm (9-1/4 x 2-7/8 x 8-1/8")
Net Weight	2.7 kg (5.8 lbs)
Power Supply Cord	2.5 m (8.2 ft)

JV0600K

RM 704

64

Jig Saw

• Toolless blade change system
for fast blade installation
and removal.



Standard Equipment:
Jig Saw Blade, Hex Wrench



Continuous Rating Input	650 W
Capacity	Wood: 90 mm (3-1/2") Steel: 10 mm (3/8")
Length of Stroke	23 mm (7/8")
Strokes Per Minute (SPM)	500 - 3,100
Dimensions (L x W x H)	236 x 77 x 199 mm (9-1/4 x 3 x 7-7/8")
Net Weight	2.4 kg (5.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

4327

RM 379

64

Jig Saw

• High power and lightweight.



Standard Equipment:
Jig Saw Blade, Hex Wrench



Continuous Rating Input	450 W
Capacity	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	500 - 3,100
Dimensions (L x W x H)	224 x 77 x 197 mm (8-7/8 x 3 x 7-3/4")
Net Weight	1.9 kg (4.2 lbs)
Power Supply Cord	2.0 m (6.6 ft)

4327M

RM 379

64

Jig Saw

• High power and lightweight.



Standard Equipment:
Jig Saw Blade, Hex Wrench



Continuous Rating Input	450 W
Capacity	Wood: 40 mm (1-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	500 - 3,100
Dimensions (L x W x H)	224 x 77 x 197 mm (8-7/8 x 3 x 7-3/4")
Net Weight	1.8 kg (4.0 lbs)
Power Supply Cord	2.0 m (6.6 ft)

JR002GM201 | JR002GZ

RM 4,462

RM 1,796

Cordless Recipro Saw

40Vmax

VIDEO CLIP
Models and specs
may vary by country



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

Standard Equipment:
Recipro Saw Blades 3pcs (B-05153 - Wood,
B-05044 - Wood with nail, B-05038 - Metal)

• GM201: 1x Fast Charger, 2x 4.0Ah Battery
• GZ : Without Charger, Battery & Carrying Case




Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 3,000
Capacity	Wood: 255 mm (10") Pipe: 130 mm (5-1/8")
Dimensions (L x W x H)	451 x 97 x 256 mm (17-3/4 x 3-13/16 x 10-1/8")
Net Weight	4.6 - 5.8 kg (10.1 - 12.8 lbs)
Work Amount (approx.)	55 cuts with BL4025 Carbon steel pipe (25A)

JR001GZ

RM 1,562

Cordless Recipro Saw**40Vmax**VIDEO CLIP
Models and specs
may vary by country

JR001G

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah**Standard Equipment:**Recipro Saw Blades 3pcs (B-05153 - Wood,
B-05044 - Wood with nail, B-05038 - Metal)

• GZ : Without Charger & Battery

**BL MOTOR XPT****DJR187RFE | DJR187Z**

RM 2,162

RM 1,114

Cordless Recipro Saw**18V****Standard Equipment:**

Recipro Saw Blades 2pcs (B-05175 & B-05169)

• RFE : 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case**BL MOTOR XPT****DJR189Z**

RM 1,062

Cordless Recipro Saw**18V**VIDEO CLIP
Models and specs
may vary by country

DJR189

**Standard Equipment:**Recipro Saw Blades 3 pcs
(B-05038, B-05153 & B-05044)

• Z: Without Charger & Battery

**BL MOTOR XPT****DJR188Z**

RM 1,031

Cordless Recipro Saw**18V**VIDEO CLIP
Models and specs
may vary by country

DJR188

**Standard Equipment:**Recipro Saw Blades 2 pcs
(B-20432 & B-20404)

• Z: Without Charger & Battery

**BL MOTOR XPT****DJR186RFE | DJR186Z**

RM 1,907

RM 851

Cordless Recipro Saw**18V****Standard Equipment:**

Recipro Saw Blades 2pcs (B-05175 & B-05169)

• RFE: 1x Rapid Charger, 2x 3.0Ah Battery
• Z : Without Charger, Battery & Carrying Case**BL MOTOR XPT**

Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	High: 0 - 3,000 Low: 0 - 2,300
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Dimensions (L x W x H)	457 x 88 x 233 mm (18 x 3-1/2 x 9-1/8")
Net Weight	4.2 - 4.5 kg (9.3 - 9.9 lbs)
Work Amount (approx.)	155 cuts with BL4040 SPF 2 x 10

Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	High: 0 - 3,000 Low: 0 - 2,300
Dimensions (L x W x H)	439 x 83 x 231 mm (17-1/4 x 3-1/4 x 9-1/8")
Net Weight	3.4 - 3.8 kg (7.6 - 8.3 lbs)
Work Amount (approx.)	65 pcs with BL1850B Cutting steel pipe Ø 34 x 3 mm

Capacity	Wood: 255 mm (10") Pipe: 130 mm (5-1/8")
Length of Stroke	22 mm (7/8")
Strokes Per Minute (SPM)	0 - 3,100
Dimensions (L x W x H)	410 x 81 x 182 mm (16-1/8 x 3-3/16 x 7-1/8")
Net Weight	2.2 - 2.5 kg (4.9 - 5.5 lbs)
Work Amount (approx.)	60 cuts with BL1860B Cutting Carbon Steel Pipe Ø 34 x 3.2 mm

Capacity	Pipe : 130 mm (5-1/8") Wood: 255 mm (10")
Length of Stroke	20 mm (13/16")
Strokes Per Minute (SPM)	0 - 3,000
Dimensions (L x W x H)	316 x 81 x 203 mm (12-1/2 x 3-3/16 x 8")
Net Weight	2.6 - 2.9 kg (5.7 - 6.4 lbs)
Work Amount (approx.)	58 pcs with BL1850B Cutting steel pipe Ø 34 x 3 mm

Capacity	Pipe : 130 mm (5-1/8") Wood: 255 mm (10")
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 2,800
Dimensions (L x W x H)	486 x 81 x 223 mm (19-1/8 x 3-3/16 x 8-3/4")
Net Weight	3.5 - 3.8 kg (7.6 - 8.3 lbs)
Work Amount (approx.)	60 pcs with BL1850B Cutting steel pipe Ø 34 x 3 mm

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Sawing

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Speciality
Tools

Accessory

Makita
-int-

DJR183Z

RM 893

Cordless Recipro Saw

18V



Standard Equipment:
Recipro Saw Blades 2 pcs

• Z: Without Charger & Battery



Capacity	Pipe : 50 mm (2") Wood: 50 mm (2")
Length of Stroke	13 mm (1/2")
Strokes Per Minute (SPM)	0 - 3,000
Dimensions (L x W x H)	392 x 81 x 209 mm (15-1/2 x 3-3/16 x 8-1/4")
Net weight	1.5 - 1.7 kg (3.3 - 3.8 lbs)
Work Amount (approx.)	56 pcs with BL1850B Cutting SPF Material 2 x 10"

JR105DWAE | JR105DZ

RM 1,098

RM 473

Cordless Recipro Saw

12Vmax



Standard Equipment:
Hex Wrench, Recipro Saw Blades 2pcs (B-20404 & B-20432)

• DWAE: 1x Standard Charger, 2x 2.0Ah Battery
• DZ : Without Charger, Battery & Carrying Case



Length of Stroke	13 mm (1/2")
Strokes Per Minute (SPM)	0 - 3,300
Capacity	Pipe: 50 mm (2") Wood: 50 mm (2")
Dimensions (L x W x H)	376 x 66 x 186 mm (14-3/4 x 2-5/8 x 7-3/8")
Net Weight	1.3 - 1.5 kg (2.9 - 3.2 lbs)
Work Amount (approx.)	45 pcs with BL1021B Cutting PVC plastic hose 48 mm

JR3070CT

RM 1,398

303 mm

Recipro Saw

• Anti-Vibration technology for 2x less vibration.



Continuous Rating Input	1,510 W
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe 130 mm (5-1/8") Wood 255 mm (10")
Overall Length	485 mm (19-1/8")
Net Weight	4.6 kg (10 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:
Recipro Saw Blades 3pcs (No. 21, 22, 23)



JR3051TK

RM 768

303 mm

Recipro Saw

• Powerful 1,200 W motor for improved performance.



Continuous Rating Input	1,200 W
Length of Stroke	30 mm (1-3/16")
Strokes Per Minute (SPM)	0 - 3,000
Capacity	Pipe 130 mm (5-1/8") Wood 255 mm (10")
Dimensions (L x W x H)	447 x 97 x 176 mm (17-5/8 x 3-13/16 x 6-15/16")
Net Weight	3.2 - 3.3 kg (7.1 - 7.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Standard Equipment:
Recipro Saw Blades 3pcs (No. 21, 22, 23)



SJ401

RM 1,334

Scroll Saw

• Bevel cuts up to 45° to the left and 15° to the right.



Continuous Rating Input	50 W
Capacity	Thickness of cut: 50 mm (2") Throat: 406 mm (16")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	400 - 1,600
Overall Length	600 mm (23-5/8")
Net Weight	14 kg (30.87 lbs)

Standard Equipment:
Saw blade x6, Hex Wrench, Blade Change Rod



Milling Planing



RT001GZ23 6.35 mm (1/4"), 9.53 mm (3/8") RM 1,510

Cordless Trimmer

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:

Collet Cone 1/4" (763637-1) 3/8" (763619-3), Trimmer Base Assembly, Straight Guide, Templet Guide, Wrench, Dust Nozzle

• GZ23 : Without Charger & Battery



Max Output	1,160W
Collet Size	6.35 mm (1/4"), 9.53 mm (3/8") Optional: 6 mm (1/4"), 8 mm (3/8")
No Load Speed (RPM)	10,000 - 31,000
Plunge Capacity	Trimmer Base: 0 - 40 mm (0 - 1-9/16") Plunge Base: 0 - 35 mm (0 - 1-3/8")
Dimensions (L x W x H)	126 x 90 x 245 mm (5 x 3-1/2 x 9-5/8")
Net Weight	2.2 - 2.5 kg (4.9 - 5.5 lbs)
Work Amount (approx.)	170 m with BL4040 Cut 1m long groove in Melapi 6mm depth with Ø 6mm straight bit

DRT50ZJX9 | DRT50Z 6 mm (1/4"), 8 mm (3/8") RM 1,995 | RM 1,156

Cordless Trimmer

18V



Standard Equipment:

Trimmer Base Assembly (196613-4), Collet Cone, Dust Nozzle, Straight Guide Assembly, Wrench x2

- ZJX9: Tilt Base Assembly (198967-4), Plunge Base Assembly (195563-0), Side Grip, Templet Guide, Guide Rail Adapter Set, Guide Holder Set, Makpac Connector Box Type 4, Without Charger & Battery
- Z : Without Charger, Battery & Carrying Case



VIDEO CLIP
Models and specs may vary by country
DRT50



Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
No Load Speed (RPM)	10,000 - 30,000
Plunge Capacity	Trimmer Base: 0 - 40 mm (0 - 1-9/16") Plunge Base: 0 - 35 mm (0 - 1-3/8")
Dimensions (L x W x H)	134 x 89 x 226 mm (5-1/4 x 3-1/2 x 8-7/8")
Net Weight	1.8 - 2.1 kg (3.9 - 4.6 lbs)
Work Amount (approx.)	83 m with BL1850B, Routing Ø 6 x 4 mm

Trimmer Base Assembly

*Come with DRT50ZJX9

*Trimmer Base
Part No. 196613-4
RM 98.60



*Tilt Base (Optional)
Part No. 198967-4
TBA



*Plunge Base (Optional)
Part No. 195563-0
RM 289.00



*Offset Base (Optional)
Part No. 196922-1
RM 367.60



DRT50Z 6 mm (1/4") RM 787

Cordless Trimmer

18V



Standard Equipment:

Wrench, Templet Guide, Chip Deflector, Straight Bit, Trimmer Guide Assembly, Straight Guide Assembly

• Z: Without Charger & Battery



Collet Capacity	6 mm (1/4")
No Load Speed (RPM)	30,000
Plunge Capacity	0 - 42 mm (0 - 1-5/8")
Dimensions (L x W x H)	134 x 90 x 220 mm (5-1/4 x 3-1/2 x 8-5/8")
Net Weight (with battery)	1.3 - 1.6 kg (2.9 - 3.5 lbs)
Work Amount (approx.)	105 m with BL1860B cut melapi Ø 6 mm straight bit depth 6 mmz

RT0700C | RT0700CX2 6 mm (1/4"), 8 mm (3/8") RM 735 | RM 1,345

Trimmer



Standard Equipment:

RT0700C: Collet Cone, Trimmer Base Assembly, Straight Guide, Dust Nozzle, Wrench x2
RT0700CX2: Collet Cone, Trimmer Base Assembly, Straight Guide, Dust Nozzle, Wrench x2, Side Grip, Templet Guide, Tilt Base Assembly, Plunge Base Assembly, Tool Bag

Continuous Rating Input	710 W
Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
No Load Speed (RPM)	10,000 - 30,000
Dimensions (L x W x H)	89 x 89 x 200 mm (3-1/2 x 3-1/2 x 7-7/8")
Net Weight	1.8 - 2.7 kg (3.9 - 6.0 lbs)
Power Supply Cord	2.5 m (8.2 ft)

For RT0700CX2 only



Tilt Base Assembly



Plunge Base Assembly



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Milling | Planing

3709 6 mm (1/4")
RM 432

411

Trimmer
• 530 W motor for smooth trimming.



Standard Equipment:
Collet Cone, Wrench x2, Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector



Continuous Rating Input	530 W
Collet Capacity	6 mm or 1/4"
No Load Speed (RPM)	30,000
Dimensions (L x W x H)	82 x 90 x 199 mm (3-1/4 x 3-1/2 x 7-7/8")
Net Weight	1.5 kg (3.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)



RP001GZ 12 mm (1/2")
RM 2,401

Cordless Router

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah



VIDEO CLIP
Models and specs may vary by country



Standard Equipment:
Wrench, Collet Sleeve, Templet Guide, Dust Nozzle, Straight Guide, Holder, Rod, Chip Deflector

• GZ: Without Charger & Battery



Continuous Rating Input	1,650 W
Collet Size	12 mm (1/2")
Plunge Capacity	60 mm (2-3/8")
No Load Speed (RPM)	8,000 - 25,000
Dimensions (L x W x H)	135 x 275 x 288 mm (5-5/16 x 10-7/8 x 11-3/8")
Net Weight (with battery)	4.0 - 5.2 kg (8.8 - 11.5 lbs)
Work Amount (approx.)	80 m with BL4040 cut MDF Ø 12 mm straight bit depth 6 mm

RP2303FC05 12 mm (1/2")
RM 2,375

203

Router (Plunge type)
• Anti-restart function minimizes accidental start-up.

NEW



Standard Equipment:
Straight Guide, Wrench, Collet Sleeve, Collet Cone, Straight Bit (D-07901)



Continuous Rating Input	2,100 W
Collet Capacity	12 mm or 1/2"
Plunge Capacity	0 - 70 mm (0 - 2-3/4")
No Load Speed (RPM)	9,000 - 23,000
Dimensions (L x W x H)	155 x 294 x 327 mm (6-1/8 x 11-5/8 x 12-7/8")
Net Weight	6.2 kg (13.7 lbs)
Power Supply Cord	4.0 m (13.1 ft)

RP0900 6 mm (1/4"), 8 mm (3/8")
RM 809

106

Router (Plunge type)
• Oversized ball bearing construction for longer tool life.



Standard Equipment:
Straight Guide, Collet Cone, Wrenches x2



Continuous Rating Input	900 W
Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
Plunge Capacity	0 - 35 mm (0 - 1-3/8")
No Load Speed (RPM)	27,000
Dimensions (L x W x H)	110 x 256 x 217 mm (4-5/16 x 10-3/32 x 8-17/32")
Net Weight	2.7 kg (6 lbs)
Power Supply Cord	2.5 m (8.2 ft)

4403 6 mm (1/4")
RM 5,029

411

Sash Router
• Large transparent chip guard for operator's safety.

WHILE STOCK LAST



Standard Equipment:
Collet Cone (6mm or 1/4"), Angle Gauge, Wrench x2, Oil Supply, Drill Point Sash Router Bit (D-16972)



Continuous rating input	530 W
Capacity	Collet: 6 mm or 1/4"
Max Width of Work	123 mm (4-7/8")
Max Width of Work (45°)	77 mm (3")
Max Height of Work	185 mm (7-1/4")
No Load Speed (RPM)	30,000
Dimensions (L x W x H)	327 x 350 x 355 mm (12-7/8 x 13-13/16 x 14")
Net Weight	16 kg (35.3 lbs)
Power Supply Cord	2.5 m (8.2 ft)



DPJ180Z
RM 1,156

430

Cordless Plate Joiner

18V



Standard Equipment:
Cutter Blade, Angle Guide, Lock Nut Wrench, Set Plate, Dust Bag

• Z: Without Charger & Battery



Blade Diameter	100 mm (4")		
Max Cutting Depth	20 mm (3/4")		
No Load Speed (RPM)	6,500		
Dimensions (L x W x H)	351 x 139 x 149 mm (13-3/4 x 5-1/2 x 5-7/8")		
Net weight	2.8 - 3.1 kg (6.2 - 6.8 lbs)		
Work Amount (approx.)	333 pcs with BL1850B Biscuit (60 x 23 x 4) Cutting Slot 12.3 mm		
Accessories (Optional)			
Type	L x W (mm)	Part No.	RSP (RM)
# 0	46 x 15	A-16922	35.00
# 10	54 x 19.5	A-16938	35.00
# 20	56 x 23.5	A-16944	35.00

* All recommended selling price (RSP) shown are for reference only (exclude SST).

PJ7000

RM 1,229

459

Plate Joiner

- Large and easy-to-operate cam locks for fence adjustments.

**Standard Equipment:**

Cutter Blade, Angle Guide, Dust Bag, Set Plate, Lock Nut Wrench



Continuous Rating Input	701 W
Blade Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	302 x 139 x 145 mm (11-7/8 x 5-1/2 x 5-3/4")
Net Weight	2.8 kg (6.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

Accessories (Optional)			
Type	L x W (mm)	Part No.	RSP (RM)
# 0	46 x 15	A-16922	35.00
# 10	54 x 19.5	A-16938	35.00
# 20	56 x 23.5	A-16944	35.00

**KP001GM201**

RM 4,353

KP001GZ 82 mm (3-1/4")

RM 1,684

Cordless Planer

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

KP001GM201
WHILE STOCK LAST

**Standard Equipment:**

Planer Blade, Blade Gauge, Guide Rule, Depth Guide, Socket Wrench, Sharpening Holder

- GM201: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Box Type 3
- GZ : Without Charger, Battery & Carrying Case



*Not applicable for Z model

BL MOTOR **XPT** **AWS**

Planing Width	82 mm (3-1/4")
Planing Depth	4 mm (5/32")
No Load Speed (RPM)	15,000
Dimensions (L x W x H)	385 x 156 x 166 mm (15-1/8 x 6-1/8 x 6-1/2")
Net Weight	3.7 - 4.9 kg (8.2 - 10.8 lbs)
Work Amount (approx.)	95 m with BL4040 67 mm wide x 1,000 mm long Douglas fir depth 2.0 mm

DKP181Z 82 mm (3-1/4")

RM 1,976

Cordless Planer

18V

VIDEO CLIP
Models and specs may vary by country



DKP181

**Standard Equipment:**

Planer Blade, Blade Gauge, Guide Rule, Depth Guide, Socket Wrench, Sharpening Holder Assembly (for resharpenable blade)

- Z: Without Charger & Battery



BL MOTOR **ADT** **AWS**

Planing Width	82 mm (3-1/4")
Planing Depth	3 mm (1/8")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	366 x 156 x 166 mm (14-3/8 x 6-1/8 x 6-1/2")
Net Weight	3.3 - 3.6 kg (7.3 - 7.9 lbs)
Work Amount (approx.)	46 m with BL1850B 67 mm wide x 1,000 mm Douglas fir depth 2.0 mm

DKP180RFE

RM 2,040

DKP180Z 82 mm (3-1/4")

RM 989

Cordless Planer

18V

**Standard Equipment:**

Planer Blade, Blade Gauge, Guide Rule, Socket Wrench

- RFE: 1x Rapid Charger, 2x 3.0Ah Battery
- Z: Without Charger, Battery & Carrying Case



*Not applicable for Z model

Planing Width	82 mm (3-1/4")
Planing Depth	2.0 mm (5/64")
No Load Speed (RPM)	14,000
Dimensions (L x W x H)	333 x 157 x 160 mm (13-1/8 x 6-3/16 x 6-5/16")
Net weight	3.2 - 3.5 kg (7.1 - 7.9 lbs)
Work Amount (approx.)	91 m with BL1850B Wood Thickness 1 mm

1805N 155 mm (6-1/8")

RM 2,362

153

Power Planer

- Rugged aluminum housing and easy depth settings.

**Standard Equipment:**

Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade



Continuous Rating Input	1,140 W
Planing Width	155 mm (6-1/8")
Planing Depth	2 mm (1/16")
No Load Speed (RPM)	15,000
Overall Length	445 mm (17-1/2")
Net Weight	7.9 kg (17.3 lbs)
Power Supply Cord	5.0 m (16.4 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Milling | Planing

Screwing / Drilling

Stringing

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

1911B 110 mm (4-3/8")
RM 1,470

106

Power Planer
• *Powerful motor in compact and lightweight body.*



Standard Equipment:
Sharpening Holder Assembly, Blade Gauge, Socket Wrench, Planer Blade



Continuous Rating Input	840 W
Planing Width	110 mm (4-3/8")
Planing Depth	2 mm (1/16")
No Load Speed (RPM)	16,000
Overall Length	355 mm (14")
Net Weight	4.1 kg (9.1 lbs)
Power Supply Cord	5.0 m (16.4 ft)

N1900B 82 mm (3-1/4")
RM 1,009

51

Power Planer
• *V-groove on base for easy chamfer cutting.*



Standard Equipment:
Blade Gauge, Socket Wrench, Planer Blade, Sharpening Holder Assembly, Guide Rule



Continuous Rating Input	580 W
Planing Width	82 mm (3-1/4")
Planing Depth	1 mm (1/32")
No Load Speed (RPM)	16,000
Overall Length	290 mm (11-3/8")
Net Weight	2.8 kg (6.1 lbs)
Power Supply Cord	2.5 m (8.2 ft)

PC5000C 125 mm (5")
RM 1,732

253

Concrete Planer
• *Electronic current limiter helps protect the motor from overload.*



Standard Equipment:
Lock Nut Wrench, Hex Wrench, Dust Bag Assembly



Continuous Rating Input	1,400 W
Wheel Diameter	125 mm (5")
Hole Dia.	22.23 mm (7/8")
No Load Speed (RPM)	10,000
Dimensions (L x W x H)	437 x 235 x 195 mm (17-1/8 x 9-1/4 x 7-5/8")
Net Weight	4 kg (8.9 lbs)
Power Supply Cord	5.0 m (16.4 ft)

PC5010C 125 mm (5")
RM 1,785

318

Concrete Planer
• *Compact and lightweight for high production work.*



Standard Equipment:
Lock Nut Wrench



Continuous Rating Input	1,400 W
Wheel Diameter	125 mm (5")
Hole Diameter	22.23 mm (7/8")
No Load Speed (RPM)	4,000 - 9,000
Dimensions (L x W x H)	350 x 231 x 179 mm (13-3/4 x 9-1/8 x 7")
Net Weight	2.5 - 3.6 kg (5.5 - 7.9 lbs)
Power Supply Cord	4.0 m (13.1 ft)

DCO180Z 6.35 mm (1/4")
RM 645

430

Cordless Cut-Out Tool

18V



Standard Equipment:
Drywall Guide Bit x2, Collet Nut, Collet Cone 6.35mm (1/4")

• Z: Without Charger & Battery



2012NB 304 mm (12")
RM 3,950

153


Planer
• *Powerful 1,650W motor for improved performance.*



Standard Equipment:
Socket Wrench, Hex Wrench, Magnetic Holder x2



Continuous Rating Input	1,650 W
Cutting Width	304 mm (12")
Cutting Depth	Cutting width 0 - 150 mm: 3 mm (1/8") Cutting width 150 - 240 mm: 1.5 mm (1/16")
Feed Rate (min)	8.5 m (27.9ft)
Table Size (W x L)	304 x 771 mm (12 x 30-3/8")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	483 x 771 x 401 mm (19 x 30-3/8 x 15-13/16")
Net Weight	27.1 - 27.6 kg (59.7 - 60.9 lbs)
Power Supply Cord	2.5 m (8.2 ft)

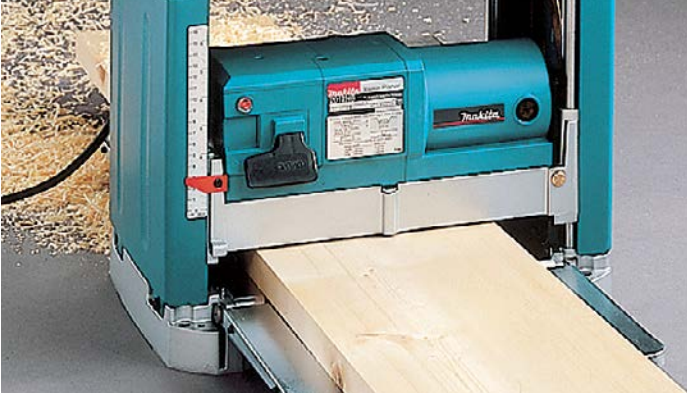

Capacity	Collet : 3.18 mm (1/8") or 6.35 mm (1/4")
No Load Speed (RPM)	30,000
Dimensions (L x W x H)	296 x 77 x 118 mm (11-5/8" x 3" x 4-5/8")
Net weight	1.5 - 1.8 kg (3.3 - 4 lbs)
Work Amount (approx.)	225 m with BL1850B 6.35 mm bit cutting Plaster board 1.2 x 800 mm

Fastening Fixing



DRV250Z | DRV150Z

RM 6,200

RM 6,195

Cordless Rivet Gun

18V



DRV150Z
WHILE
STOCK
LAST

Standard Equipment:

Grease (191D57-7), Accessory Set, Belt Clip

• Z: Without Charger & Battery



DTR181ZJ

RM 6,181

Cordless Rebar Tying Tool

18V



Standard Equipment:

Nylon Brush, Hex Wrench, Hook, + Screw

• ZJ: With 1x Makpac Connector Box, Without Charger & Battery



DTR180ZJ

RM 5,304

Cordless Rebar Tying Tool

18V



VIDEO CLIP
Models and specs
may vary by country



DTR180

Standard Equipment:

Hex Wrench, Hook

• ZJ: With 1x Makpac Connector Box, Without Charger & Battery



FN001GD101 | FN001GZ

RM 4,701

RM 3,300

Cordless Brad Nailer

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah




VIDEO CLIP
Models and specs
may vary by country



FN001G

Standard Equipment:

Nose Adapter, Hex Wrench, Belt Clip

• GD101: 1x Fast Charger, 1x 2.5Ah Battery
• GZ: Without Charger, Battery & Carrying Case

Max Pulling Force	DRV250 20 kN DRV150 10 kN
Length of Stroke	DRV250 30 mm (1-3/16") DRV150 25 mm (1")
Dimensions (L x W x H)	DRV250 320 x 79 x 287 mm (12-5/8 x 3-1/8 x 11-1/4") DRV150 310 x 80 x 287 mm (12-1/4 x 3-1/8 x 11-1/4")
Net Weight	DRV250 2.1 - 2.4 kg (4.6 - 5.2 lbs) DRV150 1.9 - 2.2 kg (4.3 - 5.0 lbs)
Work Amount (approx.)	DRV250 2,000 rivets with BL1850B DRV150 2,300 rivets with BL1850B Mandrel diameter: Ø 4.8 mm

Applicable Tie Wire	Annealed wire: 21 Ga (0.8 mm) Galvanized wire: 21 Ga (0.8 mm) Poly coated wire: 20 Ga (0.9 mm)
---------------------	--

Applicable Rebars	D16 x D16 - (D13 x 2) x (D16 x 2)
Dimensions (L x W x H)	317 x 93 x 318 mm (12-1/2 x 3-5/8 x 12-1/2")
Net Weight	2.4 - 2.7 kg (5.3 - 6.0 lbs)
Work Amount (approx.)	5000 times with BL1860B Tying (D16 x D16 Rebar)

Tie Wire	Ø 0.8 mm
Applicable Rebars	D10 x D10 - (D13 x 2) x (D13 x 2)
Dimensions (L x W x H)	304 x 93 x 318 mm (12 x 3-2/3 x 12-1/2")
Net Weight	2.3 - 2.6 kg (5.1 - 5.7 lbs)
Work Amount (approx.)	5300 times with BL1850B Tying (D10 x D10 Rebar)

Capacity	Length: 15 - 40 mm (5/8" - 1-5/8") Gauge: 18 Ga
Magazine Capacity	100
Dimensions (L x W x H)	265 x 86 x 243 mm (10-3/8 x 3-3/8 x 9-9/16")
Net Weight	2.6 - 3.2 kg (5.7 - 7.1 lbs)
Work Amount (approx.)	5000 pcs with BL4025 Nail: Length 15-40 mm, Gauge 18 Ga

Accessories (Optional)				
Description	Size	Pcs/ Box	Part No.	RSP (RM)
Brad Nail 15 mm (5/8")	F15	5,000	B-04307	39.90
Brad Nail 20 mm (3/4")	F20	5,000	B-04313	48.60
Brad Nail 25 mm (1")	F25	5,000	B-04329	58.00
Brad Nail 30 mm (1-3/16")	F30	5,000	B-04335	65.50
Brad Nail 35 mm (1-3/8")	F35	5,000	B-04357	73.10

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Fastening | Fixing

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory



Thakita
-int-

DFN350Z

RM 3,403

Cordless Brad Nailer

18V



Standard Equipment:
Nose Adapter, Hex Wrench, Belt Clip

* Z: Without Charger & Battery



Capacity	Length: 15 - 35 mm (5/8 - 1-3/8") Gauge: 18 Ga
Magazine Capacity	110
Dimensions (L x W x H)	257 x 79 x 228 mm (10-1/8 x 3-1/8 x 9")
Net Weight	2.1 - 2.4 kg (4.6 - 5.3 lbs)
Work Amount (approx.)	4000 pcs with BL1850B


Accessories (optional)				
Description	Size	Pcs/ Box	Part No.	RSP (RM)
Brad Nail 15 mm (5/8")	F15	5,000	B-04307	39.90
Brad Nail 20 mm (3/4")	F20	5,000	B-04313	48.60
Brad Nail 25 mm (1")	F25	5,000	B-04329	58.00
Brad Nail 30 mm (1-3/16")	F30	5,000	B-04335	65.50
Brad Nail 35 mm (1-3/8")	F35	5,000	B-04357	73.10

DBN601Z

RM 3,312

Cordless Finish Nailer

18V



Standard Equipment:
Nose Adapter, Hook

* Z: Without Charger & Battery



Capacity	Length: 19 - 64 mm (3/4 - 2-1/2") Gauge: 16 Ga
Magazine Capacity	110
Dimensions (L x W x H)	276 x 98 x 320 mm (10-7/8 x 3-7/8 x 12-5/8")
Net Weight	2.9 - 3.3 kg (6.4 - 7.3 lbs.)
Work Amount (approx.)	1100 pcs with BL1820B

PT001GZ


RM 2,601

Cordless Pin Nailer

40Vmax



* Recommended batteries
2.0Ah, 2.5Ah



Standard Equipment:
Nose Adapter, Belt Clip, Hex Wrench

* GZ : Without Charger & Battery



Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Magazine Capacity	120
Dimensions (L x W x H)	265 x 86 x 226 mm (10-3/8 x 3-3/8 x 8-7/8")
Net Weight	2.4 - 3.0 kg (5.3 - 6.6 lbs)
Work Amount (approx.)	6000 pcs with BL4025



Accessories (Optional)				
Description	Size	Pcs/ Box	Part No.	RSP (RM)
Pin Nail 18 mm (11/16")	P18	10,000	F-31825	62.60
Pin Nail 25 mm (1")	P25	10,000	F-31838	78.20
Pin Nail 30 mm (1-3/16")	P30	10,000	F-31841	87.70
Pin Nail 35 mm (1-3/8")	P35	10,000	F-31854	99.90

DPT353Z

RM 2,310

Cordless Pin Nailer

18V



Standard Equipment:
Nose Adapter, Belt Clip

* Z: Without Charger & Battery



Capacity	Length: 15, 18, 25, 30, 35 mm (5/8", 11/16", 1", 1-3/16", 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Magazine Capacity	120
Dimensions (L x W x H)	257 x 79 x 226 mm (10-1/8 x 3-1/8 x 8-7/8")
Net Weight	2.0 - 2.3 kg (4.4 - 5.1 lbs)
Work Amount (approx.)	5300 pcs Pin Nail with BL1850B


Accessories (optional)				
Description	Size	Pcs/ Box	Part No.	RSP (RM)
Pin Nail 18 mm (11/16")	P18	10,000	F-31825	62.60
Pin Nail 25 mm (1")	P25	10,000	F-31838	78.20
Pin Nail 30 mm (1-3/16")	P30	10,000	F-31841	87.70
Pin Nail 35 mm (1-3/8")	P35	10,000	F-31854	99.90

PT354DZ

RM 2,175

Cordless Pin Nailer

12Vmax



Standard Equipment:
Nose Adapter, Belt Clip, Hex Wrench

* DZ: Without Charger & Battery



Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Magazine Capacity	120
Dimensions (L x W x H)	231 x 66 x 226 mm (9-1/8 x 2-5/8 x 8-7/8")
Net Weight	1.8 - 2.0 kg (4.0 - 4.4 lbs)
Work Amount (approx.)	1333 pcs with BL1021B Pin nail

Accessories (optional)				
Description	Size	Pcs/ Box	Part No.	RSP (RM)
Pin Nail 18 mm (11/16")	P18	10,000	F-31825	62.60
Pin Nail 25 mm (1")	P25	10,000	F-31838	78.20
Pin Nail 30 mm (1-3/16")	P30	10,000	F-31841	87.70
Pin Nail 35 mm (1-3/8")	P35	10,000	F-31854	99.90

* All recommended selling price (RSP) shown are for reference only (exclude SST).

ST002GZ 10 mm
RM 2,601

Cordless Stapler

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Hook (346317-0)

• GZ: With Carrying Case, Without Charger & Battery



Staple Width	10 mm Length: 13 - 25 mm		
Size	1.2 x 0.6 mm		
Magazine Capacity	100		
Dimensions (L x W x H)	222 x 86 x 216 mm (8-3/4 x 3-3/8 x 8-1/2")		
Net Weight	2.5 - 3.7 kg (5.7 - 8.2 lbs)		
Work Amount (approx.)	6000 shots with BL4025		
Accessories (Optional)			
Description	Length	Part No.	RSP (RM)
Staple 1013J	13 mm	B-04472	49.10
Staple 1016J	16 mm	B-04488	54.40
Staple 1019J	19 mm	B-04494	61.30
Staple 1022J	22 mm	B-04503	65.00
Staple 1025J	25 mm	B-04519	71.30

DST121ZK
RM 2,731

Cordless Stapler

18V



Standard Equipment:
Nose Adapter, Belt Clip

• ZK: With Carrying Case, Without Charger & Battery



Staple	Width: 10 mm (3/8") Length: 13 - 25 mm (1/2 - 1") Size: 1.2 x 0.6 mm		
Magazine Capacity	100		
Dimensions (L x W x H)	260 x 79 x 216 mm (10-1/4 x 3-1/8 x 8-1/2")		
Net Weight	2.2 - 2.5 kg (4.9 - 5.5 lbs)		
Work Amount (approx.)	4000 pcs with BL1850B		
Accessories (optional)			
Description	Length	Part No.	RSP (RM)
Staple 1013J	13 mm	B-04472	49.10
Staple 1016J	16 mm	B-04488	54.40
Staple 1019J	19 mm	B-04494	61.30
Staple 1022J	22 mm	B-04503	65.00
Staple 1025J	25 mm	B-04519	71.30



Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita

MAKITA



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Cleaning



VC006GMZ03

RM 4.915

Cordless Vacuum Cleaner (Wet & Dry)

40Vmax x2



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



*Optional accessories
required for
wet application

GYPPA!



Standard Equipment:

Filter Bag Set, Bending Pipe, Straight Pipe Set,
Hose Complete 38-2.5 Set, Front Cuff 24 Set, Nozzle Assembly Set,
Corner Nozzle, Joint 22-38, Stopper

* GMZ03: Without Charger & Battery



BL

MOTOR

AWS

XPT

VC002GLZ

RM 2.962

Cordless Vacuum Cleaner (Dry)

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



GYPPA!



Standard Equipment:

Nozzle Assembly Set, Corner Nozzle (410306-2), Straight Pipe (192563-1),
Bending Pipe (192562-3), Hose Complete 28-3.5 Set (195433-3), Hose Complete
38-2.5 Set (195434-1), Front Cuff 24 (195546-0), Front Cuff 22 (195547-8),
Poly Bag Set (10pcs/ pack) (195432-5), Multi Hook

* GLZ: Without Charger & Battery



BL

MOTOR

XPT

AWS

HEPA

filter

VC001GLZ

RM 2.584

Cordless Vacuum Cleaner (Wet & Dry)

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Nozzle Assembly Set (191G86-8), Long Sash Nozzle (198919-6),
Telescopic Pipe (140G19-0), Hose Complete 32-1.7 Set (199493-7),
Poly Bag Set (10pcs/ pack) (195432-5), Multi Hook

* GLZ: Without Charger & Battery



BL

MOTOR

XPT

VC005GLZ

RM 2.584

Cordless Vacuum Cleaner (Dry)

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Nozzle Assembly Set (191G86-8), Long Sash Nozzle (198919-6),
Telescopic Pipe (140G19-0), Hose Complete 32-1.7 Set (199493-7),
Poly Bag Set (10pcs/ pack) (195432-5), Multi Hook

* GLZ: Without Charger & Battery



BL

MOTOR

XPT

Capacity	Dust: 40 L Water: 30 L (with optional accessory)
Max Air Flow	2.0 m³/min - with Hose 28-3.5 3.7 m³/min - with Hose 38-2.5
Max Sealed Suction	18 kPa
Suction Power	350 W
Dimensions (L x W x H)	586 x 385 x 598 mm (23 x 15-1/8 x 23-1/2")
Net Weight	18.4 - 20.8 kg (40.6 - 45.9 lbs)
Continuous Usage Time (approx.)	80 min with BL4050F x2 (min dial)

Capacity	Dust: 8 L
Max Air Flow	1.8 m³/min
Max Sealed Suction	23 kPa
Suction Power	205 W
Dimensions (L x W x H)	366 x 334 x 425 mm (14-3/8 x 13-1/8 x 16-3/4")
Net Weight	8.3 - 11.4 kg (18.3 - 25.1 lbs)
Continuous Usage Time (approx.)	220 min with BL4050F x2 Dial Mode 1

Capacity	Dust: 8 L Water: 6 L
Max Air Flow	3.2 m³/min
Max Sealed Suction	23 kPa
Suction Power	310 W
Dimensions (L x W x H)	366 x 334 x 425 mm (14-3/8 x 13-1/8 x 16-3/4")
Net Weight	8.1 - 11.2 kg (17.9 - 24.7 lbs)
Continuous Usage Time (approx.)	220 min with BL4050F x2 Dial Mode 1

Capacity	Dust: 8 L
Max Air Flow	2.8 m³/min
Max Sealed Suction	23 kPa
Suction Power	265 W
Dimensions (L x W x H)	366 x 334 x 397 mm (14-3/8 x 13-1/8 x 15-5/8")
Net Weight	7.9 - 11.0 kg (17.4 - 24.3 lbs)
Continuous Usage Time (approx.)	220 min with BL4050F x2 Dial Mode 1

DVC157LZX5

RM 4,900

Cordless Vacuum Cleaner (Dry)

18V x2



Standard Equipment:

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Damper, Dry Powder Filter

• LZX5: Without Charger & Battery



Capacity	Dust: 15 L
Max Air Flow	2.4 m³/min
Max Sealed Suction	11 kPa
Suction Power	110 W
Dimensions (L x W x H)	366 x 334 x 421 mm (14-3/8 x 13-1/8 x 16-1/2")
Net Weight	8.0 - 8.6 kg (17.6 - 19.0 lbs)
Continuous Usage Time (approx.)	83 min with BL1850B x2

DVC155LZX3

RM 3,300

Cordless Vacuum Cleaner (Wet & Dry)

18V x2



Standard Equipment:

Floor Nozzle, Long Sash Nozzle, Telescopic Pipe Assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Plastic Dust Bag

• LZX3: Without Charger & Battery



Capacity	Dust: 15 L Water: 12L
Max Air Flow	2.1 m³/min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 421 mm (14-3/8 x 13-1/8 x 16-1/2")
Net Weight	7.2 - 7.9 kg (15.9 - 17.4 lbs)
Continuous Usage Time (approx.)	83 min with BL1850B x2

DVC865LZX3

RM 2,900

Cordless Vacuum Cleaner (Wet & Dry)

18V x2



Standard Equipment:

Floor Nozzle, Long Sash Nozzle, Telescopic Pipe Assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box

• LZX3: Without Charger & Battery



Capacity	Dust: 8 L Water: 6 L
Max Air Flow	2.1 m³/min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366 x 334 x 368 mm (14-3/8 x 13-1/8 x 14-1/2")
Net Weight	7.0 - 7.7 kg (15.4 - 17.0 lbs)
Continuous Usage Time (approx.)	83 min with BL1850B x2 Dial Mode 1

DVC864LZ

RM 3,500

Cordless Vacuum Cleaner (Dry)

18V x2



WHILE STOCK LAST

Standard Equipment:

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm), Hose (28mm), Front Cuffs (22, 24, 28), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Wireless Unit (Build-in)

• LZ: Without Charger & Battery



Capacity	Dust: 8 L
Max Air Flow	2.1 m³/min
Max Sealed Suction	9.8 kPa
Suction Power	65 W
Dimensions (L x W x H)	366 x 334 x 368 mm (14-3/8 x 13-1/8 x 14-1/2")
Net Weight	7.7 - 8.4 kg (17.1 - 18.4 lbs)
Continuous Usage Time (approx.)	40 min with BL1850B x2

DVC863LZ

RM 2,900

Cordless Vacuum Cleaner (Dry)

18V x2



Standard Equipment:

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose 38mm, Hose 28mm, Front Cuffs (22, 24, 38), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box

• LZ: Without Charger & Battery



Capacity	Dust: 8 L
Max Air Flow	2.1 m³/min
Max Sealed Suction	9.8 kPa
Suction Power	90 W
Dimensions (L x W x H)	366 x 334 x 368 mm (14-3/8 x 13-1/8 x 14-1/2")
Net Weight	7.7 kg (17.1 lbs)
Continuous Usage Time (approx.)	40 min with BL1850B x2

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory



Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Speciality
Tools

Accessory

Makita
-INT-

Cleaning

DVC862LZ

RM 2,900

Cordless Vacuum Cleaner
(Wet & Dry)

18V x2

Standard Equipment:
Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe,
Hose (38mm), Plastic Dust Bag, Plastic Dust Bag x10,
Cloth Filter, Tool Box

• LZ : Without Charger & Battery



WHILE
STOCK
LAST



Capacity	Dust: 8 L Water: 6 L
Max Air Flow	2.1 m³/min
Max Sealed Suction	9.8 kPa
Suction Power	90 W
Dimensions (L x W x H)	366 x 334 x 368 mm (14-3/8 x 13-1/8 x 14-1/2")
Net Weight	7.0 kg (15.5 lbs)
Continuous Usage Time (approx.)	40 min with BL1850B x2

DVC860LZ

RM 3,700

Corded & Cordless Vacuum
Cleaner (Wet & Dry)

18V x2

Standard Equipment:
Floor Nozzle, Corner Nozzle, Straight Pipe,
Bent Pipe, Hose (38mm), Plastic Dust Bag,
Plastic Dust Bag x10, Cloth Filter, Tool Box,
Connection Cord

• LZ: Without Charger & Battery



Capacity	Dust: 8 L Water: 6 L
Max Air Flow	AC: 3.6 m³/min DC: 2.1 m³/min
Max Sealed Suction	AC: 24 kPa DC: 9 kPa
Suction Power	AC: 320 W DC: 25 - 70 W
Dimensions (L x W x H)	366 x 334 x 368 mm (14-3/8 x 13-1/8 x 14-1/2")
Net Weight	8.6 kg (19.0 lbs)
Continuous Usage Time (approx.)	65 min with BL1850B x2

VC3210L

RM 2,884

Vacuum Cleaner
(Wet & Dry)

• For both wet and dry
vacuum cleaning.



Dust Class L



GYUPPA!



Continuous Rating Input	1,050 W
Max Peak Air Flow	2.0 m³/min
Max Sealed Suction (water column)	22.0 kPa (2,240 mmH ₂ O)
Tank Capacity	Dust: 32 L Water: 27 L
Dimensions (L x W x H)	552 x 398 x 685 mm (21-3/4 x 15-5/8 x 27")
Net Weight	14.5 kg (32.0 lbs)
Power Supply Cord	5.0 m (16.4 ft)

VC2510L

RM 2,556

Vacuum Cleaner
(Wet & Dry)

• For both wet and dry
vacuum cleaning.



Dust Class L



GYUPPA!



Continuous Rating Input	1,050 W
Max Peak Air Flow	2.0 m³/min
Max Sealed Suction (water column)	22.0 kPa (2,240 mmH ₂ O)
Tank Capacity	Dust: 25 L Water: 14 L
Dimensions (L x W x H)	432 x 416 x 451 mm (17 x 16-3/8 x 17-3/4")
Net Weight	10.5 kg (23.2 lbs)
Power Supply Cord	5.0 m (16.4 ft)

VC2000L

RM 1,156

Vacuum Cleaner
(Wet & Dry)

• For both wet and dry
vacuum cleaning.

Standard Equipment:
3.5m x 32mm Hose, Heavy Duty
PET Filter, Cloth Bag, Poly Bag Set,
Hose Band, Floor Nozzle, Universal Nozzle,
Crevice Nozzle, Straight Pipe x2



Dust Class L



WHILE
STOCK
LAST



Continuous Rating Input	1,000 W
Capacity	Dust: 20 L Water: 13 L
Max Air Flow	3.6 m³/min
Max Sealed Suction	21 kPa
Net Weight	7.5 kg

Capacity	 DRY  WET	
40 L	40Vmax x2 VC006GM Suction Power 350 w *Optional accessories required for wet application 	
15 L Dry 12 L Wet	18V x2 DVC155L Suction Power 105 w 	
8 L Dry 6 L Wet	18V x2 DVC865L Suction Power 105 w  18V x2 DVC862L Suction Power 65 w  18V x2 AC DVC860L HYBRID Suction Power AC 320 w DC 25-70 w  40Vmax VC001GL Suction Power 310 w 	

Capacity	 DRY	
15 L	18V x2 DVC157L Suction Power 110 w HEPA filter 	
8 L	18V x2 DVC864L Suction Power 65 w HEPA filter  18V x2 DVC863L Suction Power 90 w HEPA filter  40Vmax VC002GL Suction Power 205 w HEPA filter  40Vmax VC005GL Suction Power 265 w 	

Model	Powered	Max Air Flow (m³/min)	Max Sealed Suction (kPa)	BL MOTOR	XPT	AWS
VC006GM	40Vmax x2	3.7	18	●	●	●
VC005GL	40Vmax	2.8	23	●	●	-
VC002GL	40Vmax	1.8	23	●	●	●
VC001GL	40Vmax	3.2	23	●	●	-
DVC865L	18V x2	2.1	11	●	●	-
DVC864L	18V x2	2.1	9.8	●	●	●
DVC863L	18V x2	2.1	9.8	●	●	-
DVC862L	18V x2	2.1	9.8	●	●	-
DVC860L	18V x2 AC	DC: 2.1** AC: 3.6**	DC: 9.0 AC: 24	-	-	-
DVC157L	18V x2	2.1	11	●	●	●
DVC155L	18V x2	2.1	11	●	●	-

**with hose Ø 38 mm 2.5 m

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Cleaning

VC013GL

Cordless Vacuum Cleaner



Variable suction power control
The suction power can be adjusted steplessly to suit the task or application.

Main power switch

Battery fuel gauge

Suction force adjusting knob



Dry



Wet*

Dust Capacity
7.5 L



*Optional accessories required for wet application



HEPA filter



Damper



Pre filter

Automatic filter cleaning mechanism when Damper and Prefilter are attached.

Filter Bag (optional accessory)
Effectively captures fine dust particles. Suitable for cleaning with the wireless activation function.



(made of non-woven fabric)

Improved usability during dust disposal

VC013GLZ

RM 1,796

Cordless Vacuum Cleaner (Wet & Dry)

40Vmax



***Recommended batteries**
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah

WET *Optional accessories required for wet application

DRY



VIDEO CLIP
Models and specs may vary by country.

VC013GL



NEW

Standard Equipment:
Hose Complete, Wide Nozzle, Sash Nozzle, Shoulder Belt, Damper, Prefilter, HEPA Filter

• GLZ: Without Charger & Battery



DVC750LZX3

RM 1,330

Cordless Portable Vacuum Cleaner (Wet & Dry)

18V



WET

DRY



VIDEO CLIP
Models and specs may vary by country.

DVC750



Come with
Wet Filter Set (For wet application only)
Part No. 191M39-3
RM 84.40

Standard Equipment:
Hose, Wide Nozzle, Sash Nozzle, Shoulder Belt, *Wet Filter Set (191M39-3)
*For wet application only

• LZX3: Without Charger & Battery



VC011GZ

RM 2,815

Cordless Backpack Vacuum Cleaner

40Vmax



***Recommended batteries**
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Telescopic Pipe Complete (140G19-0), Bent Pipe Complete (140G26-3), Hose Band (166116-2), Filter Bag Set (191C26-2), Dust Bag Set (191C30-1), Nozzle Assembly Set (191G86-8), Long Corner Nozzle Set (198919-6), Hose Complete 32-1.0 Set (199453-9)

• GZ: Without Charger & Battery



Capacity	Dust: 7.5 L Water: 4.5 L
Max Air Flow	2.0 m³/min
Max Sealed Suction	15 kPa
Suction Power	25 - 165 W
Dimensions (L x W x H)	400 x 251 x 282 mm (15-3/4 x 9-7/8 x 11-1/8")
Net Weight	5.0 - 6.2 kg (11.0 - 13.7 lbs.)
Continuous Usage Time (approx.)	22 - 120 min with BL4050F Maximum - Minimum speed

Capacity	Dust: 7.5 L
Max Air Flow	High: 1.6 m³/min Normal: 1.3 m³/min
Max Sealed Suction	High: 6.7 kPa Normal: 4.2 kPa
Suction Power	High: 50 W Normal: 25 W
Dimensions (L x W x H)	418 x 251 x 278 mm (16-1/2 x 9-7/8 x 11")
Net Weight	4.3 - 4.6 kg (9.4 - 10.1 lbs)
Continuous Usage Time (approx.)	Normal: 60 min High: 30 min with BL1850B

Capacity	Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L
Max Air Flow	2.4 m³/min
Max Sealed Suction	20 kPa
Suction Power	Mode 1: 25 W Mode 2: 55 W Mode 3: 100 W Mode 4: 195 W
Dimensions (L x W x H)	301 x 185 x 526 mm (11-7/8 x 7-1/4 x 20-3/4")
Net Weight	6.4 - 9.5 kg (14.1 - 20.9 lbs)
Continuous Usage Time (approx.)	260 min with BL4050F x2 Dial Mode 1

* All recommended selling price (RSP) shown are for reference only (exclude SST).

VC009GZ

RM 2,193

Cordless Backpack Vacuum Cleaner

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Hose Band (166116-2), Front Cuff 22 (417765-1), Hose Comp 28-1.5 (A-34235), Filter Bag Set 2L - 10pcs set (197903-8), Front Cuff 24 (424379-9)

• GZ: Without Charger & Battery



VC008GZ

RM 2,220

Cordless Backpack Vacuum Cleaner

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Telescopic Pipe Complete (140G19-0), Hose Band (166116-2), Dust Bag Assembly Set 2L (197898-5), Long Sash Nozzle Set 28 (198919-6), Bent Pipe Complete (140G26-3), Nozzle Assembly Set (191G86-8), Filter Bag Set 2L - 10pcs set (197903-8), Hose Complete 32-1.0 Set (199453-9)

• GZ: Without Charger & Battery



DVC660Z

RM 2,815

Cordless Backpack Vacuum Cleaner

18V x2



VIDEO CLIP
Models and specs
may vary by country



DVC660



Standard Equipment:

Floor Nozzle, Hose, Hose Band, Nozzle Assembly, Telescopic Pipe Assembly, Bent Pipe, Free Nozzle, Dust Bag

• Z: Without Charger & Battery



DVC261Z

RM 2,365

Cordless Backpack Vacuum Cleaner

18V x2



VIDEO CLIP
Models and specs
may vary by country



DVC261



Standard Equipment:

HEPA Filter Assembly, Hose Band, Paper Filter Bag (2 L), Hose (28 mm), Floor Nozzle, Flexible Rubber Nozzle, Telescopic Pipe Assembly, Bent Pipe

• Z: Without Charger & Battery



DRC300Z

RM 13,770

Robotic Cleaner

18V



VIDEO CLIP
Models and specs
may vary by country



DRC300



Standard Equipment:

Side Brush, RF Remote Controller (2x AAA Alkaline Batteries included)

• Z: Without Charger & Battery



Capacity	Paper Dust Bag: 2.0 L Cloth Dust Bag: 1.5 L
Max Air Flow	1.9 m³/min
Max Sealed Suction	18 kPa
Suction Power	Mode 1: 45 W Mode 2: 85 W Mode 3: 165 W
Dimensions (L x W x H)	233 x 150 x 375 mm (9-1/8 x 5-7/8 x 14-3/4")
Net Weight	4.1 - 5.3 kg (9.0 - 11.7 lbs)
Continuous Usage Time (approx.)	55 min with BL4050F Dial Mode 1

Capacity	Paper Dust Bag: 2.0 L Cloth Dust Bag: 1.5 L
Max Air Flow	2.4 m³/min
Max Sealed Suction	18 kPa
Suction Power	Mode 1: 25 W Mode 2: 55 W Mode 3: 100 W Mode 4: 195 W
Dimensions (L x W x H)	233 x 150 x 375 mm (9-1/8 x 5-7/8 x 14-3/4")
Net Weight	4.1 - 5.3 kg (9.0 - 11.7 lbs)
Continuous Usage Time (approx.)	110 min with BL4050F Dial Mode 1

Capacity	Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L
Max Air Flow	2.2 m³/min with Hose complete 32-1.0 2.0 m³/min with Hose Complete 28-1.0
Max Sealed Suction	11 kPa
Suction Power	Max: 90W High: 45W Normal: 25 W with Hose 28-1.0
Dimensions (L x W x H)	297 x 174 x 523 mm (11-3/4 x 6-7/8 x 20-5/8")
Net Weight	6.1 - 6.7 kg (13.4 - 14.8 lbs)
Continuous Usage Time (approx.)	Max: 33 min High: 62 min Normal: 116 min with BL1850B x2

Capacity	Paper Dust Bag: 2.0 L Cloth Dust Bag: 1.5 L
Max Air Flow	2.3 m³/min with Hose complete 38-1.5 2.2 m³/min with Hose complete 32-1.0 2.0 m³/min with Hose Complete 28-1.0 1.8 m³/min with Hose Complete 28-1.5
Max Sealed Suction	11 kPa
Suction Power	Max: 105 W High: 55 W Normal: 30 W with Hose 38-1.5 Max: 95 W High: 50 W Normal: 25 W with Hose 32-1.0 Max: 90 W High: 45 W Normal: 25 W with Hose 28-1.0 Max: 85 W High: 45 W Normal: 25 W with Hose 28-1.5
Dimensions (L x W x H)	230 x 152 x 373 mm (9"x6"x14-3/4")
Net Weight	3.8 - 4.5 kg (8.5 - 9.9 lbs)
Continuous Usage Time (approx.)	Normal: 140 min High: 75 min Max: 40 min with BL1860B x2

Max Cleaning Area	BL1860B x2: 600 m²
Max Running Speed	0.3 m/ sec
Dust Box Capacity	3.0 L
Dimensions (L x W x H)	500 x 500 x 204 mm (19-3/4 x 19-3/4 x 8")
Net Weight	9.6 - 10.6 kg (21.2 - 23.4 lbs)
Continuous Usage Time (approx.)	240 min with BL1860B x2

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
int

Cleaning

DRC200Z

RM 7,800

Robotic Cleaner

18V



VIDEO CLIP
Models and specs may vary by country



DRC200

WHILE STOCK LAST



Standard Equipment:
Wireless remote controller (including two AAA alkaline batteries), Side Brush, Boundary Tape

• Z: Without Charger & Battery


BL MOTOR

Max Cleaning Area	BL1850B x2 : 500 m ²
Max Running Speed	0.3 m/ sec
Dust Box Capacity	2.5 L
Dimensions (L x W x H)	460 x 460 x 180 mm (18-1/8 x 18-1/8 x 7-1/8")
Net Weight	7.3 kg (16.1 lbs)
Continuous Usage Time (approx.)	200 min with BL1850B x2

VC010G Cordless Upright Cleaner

High dust pick-up rate made it easier for dust to pass through suction port to increase dust pick-up rate.

- Using an enhanced motor for higher suction power
- Redesigning suction port



Main body able to tilt up to 90 degrees
For cleaning in tight spaces under furniture, sofa, bed and more.



Tool-less brushroll replacement allows for quick maintenance.





One-touch 3-suction mode selection switch with mode memory function



5-stage brushroll height adjustment, manually adjustable to carpet pile length



Paper dust bag (Non-woven cloth type)

Dust Capacity 5 L

HEPA filter



The nozzle, brush, and pipe can be stored on the machine for convenient use



Side brushes on both sides are convenient for cleaning along and close to walls



Easier foot lever operation

381 mm

80 mm



VC010GZ

RM 5,203

Cordless Upright Cleaner

40Vmax



NEW

Standard Equipment: Long Sash Nozzle, Round Brush, Filter Bag, Main Filter H Set, Filter Bag Set,

• GZ: Without Charger & Battery

BL MOTOR **HEPA filter**

*** Recommended batteries**
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Capacity	Dust: 5 L
Max Air Flow	1.8 m ³ /min
Max Sealed Suction	15 kPa
Suction Power	High: 110 W Normal: 50 W Low Noise: 25 W
Dust Pick-Up Rate (%)	High: 55 Normal: 45 Low Noise: 36
Cleaning Width	381 mm
Dimensions (L x W x H)	326 x 381 x 1,146 mm (12-7/8 x 15 x 45")
Net Weight	8.0 - 9.2 kg (17.6 - 20.3 lbs)
Continuous Usage Time (approx.)	High: 25 min Normal: 50 min Low Noise: 100 min with BL4050F

* All recommended selling price (RSP) shown are for reference only (exclude SST).

DVC560Z

RM 3,289

Cordless Upright Cleaner**18V x2**

▶ VIDEO CLIP
Models and specs
may vary by country



DVC560

Standard Equipment: Long Sash Nozzle,
Round Brush, Filter Bag, Filter H (HEPA Filter)

• Z: Without Charger & Battery



BL MOTOR **HEPA filter**



Capacity	Dust: 5 L
Max Air Flow	1.9 m³/min
Max Sealed Suction	12 kPa
Suction Power	Max: 85 W Normal: 50 W Low Noise: 25 W
Dust Pick-Up Rate	Max: 47 l Normal: 44 l Low Noise: 40
Cleaning Width	318 mm
Brushroll Rotation Speed	Max: 3,500 RPM Normal: 2,500 RPM Low Noise: 1,000 RPM
Dimensions (L x W x H)	326 x 318 x 1,146 mm (12-7/8 x 12-1/2 x 45")
Net Weight	8.3 - 9.0 kg (18.3 - 19.8 lbs)
Continuous Usage Time (approx.)	Max: 25 min Normal: 50 min Low Noise: 100 min with BL1850B x2

DCL184Z

RM 873

Cordless Cleaner**18V**

▶ VIDEO CLIP
Models and specs
may vary by country

DCL184
CL121D

Standard Equipment:
Seat Nozzle, Mat Nozzle, Rubber Nozzle,
Soft Brush, Blower Attachment, Dust Bag,
Paper Dust Bag 5pcs (194566-1),
Shoulder Belt

• Z: Without Charger & Battery



Capacity	Cloth Dust Bag: 500 mL Paper Dust Bag: 330 mL
Max Air Flow	1.4 m³/min
Max Sealed Suction (water column)	5.4 kPa (550 mmH ₂ O)
Suction Power	Max: 38 W High: 23 W Normal: 5 W
Dimensions (L x W x H)	365 x 138 x 202 mm (14-3/8 x 5-7/16 x 8")
Net Weight	1.8 - 2.2 kg (4.0 - 4.9 lbs)
Continuous Usage Time (approx.)	Max: 33 min High: 50 min Normal: 133 min with BL1850B

CL121DZ

RM 893

Cordless Cleaner**12Vmax**

▶ VIDEO CLIP
Models and specs
may vary by country

DCL184
CL121D

Standard Equipment:
Mat Nozzle, Seat Nozzle, Rubber Nozzle,
Soft Brush, Blower Nozzle, Dust Bag,
Paper Dust Bag 5pcs (194566-1),
Shoulder Belt

• DZ: Without Charger & Battery



Capacity	Dust Bag: 500 mL Paper Pack: 330 mL
Max Air Flow	1.3 m³/min
Max Sealed Suction (water column)	4.6 kPa (470 mmH ₂ O)
Suction Power	Max: 28 W High: 19 W Normal: 5W
Dimensions (L x W x H)	345 x 138 x 202 mm (13-5/8 x 5-7/16 x 8")
Net Weight	1.7 - 1.8 kg (3.7 - 4.0 lbs)
Continuous Usage Time (approx.)	Normal: 67 min High: 32 min Max: 27 min with BL1041B

VS001GZ

RM 9,375

Cordless Vacuum Sweeper**40Vmax**

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F),
5.0Ah, 8.0Ah

▶ VIDEO CLIP
Models and specs
may vary by country



VS001G

Accessories (Optional)

Multi Adapter Set
Part No. 1913F5-2
RM 491



Dust Bag Set
Part No. 1913F7-8
RM 771



• GZ: Without Charger & Battery



BL MOTOR **XPT HEPA filter**



Dust Container Capacity	24 L (6.3 gal)
Cleaning Width	Main brush: 480 mm (18-7/8")
Filter Cleaning Function	YES (Electric)
Dimensions (L x W x H)	Handle in upright position: 830 x 677 x 1,146 mm (32-3/4 x 26-3/4 x 45") Handle in retracted position: 830 x 677 x 467 mm (32-3/4 x 26-3/4 x 18-3/8")
Net Weight (with battery)	29.9 - 33.1 kg (65.9 - 73.0 lbs)
Continuous Usage Time (approx.)	480 min - quiet mode 200 min - standard mode with BL4080F x2

CL001GZ04 | CL001GZ10

RM 887

RM 887

Cordless Cleaner**40Vmax**

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

Standard Equipment: Floor Nozzle, Sash Nozzle,
Sash Nozzle Holder, Pipe, Easy Shake Off Filter B set

• GZ04: Without Charger & Battery (Black)
• GZ10: Without Charger & Battery (White)



BL MOTOR



Capacity	730 mL
Max Air Flow	1.2 m³/min
Max Sealed Suction (water column)	21 kPa (2,100 mmH ₂ O)
Suction Power	4: 125W 3: 70W 2: 45W 1: 20 W with Easy Shake Off Filter
Dimensions (L x W x H)	1,066 x 113 x 152 mm (42 x 4-7/16 x 6")
Net Weight	1.7 - 2.3 kg (3.5 - 5.1 lbs)
Continuous Usage Time (approx.)	4: 25 min 3: 40 min 2: 64 min 1: 128 min with BL4040

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
int.

Cleaning

CL002GZ03

CL002GZ07

RM 889

RM 889

Cordless Cleaner

40Vmax

VIDEO CLIP

Models and specs may vary by country

CL002G

Standard Equipment:

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, High Performance Dust Bag, Paper Dust Bag 5pcs (194566-1)

• GZ03 : Without Charger & Battery (Black)

• GZ07 : Without Charger & Battery (White)

CL002GZ07

CL002GZ03

*Recommended batteries

2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

Capacity	Cloth dust bag: 500 mL Paper dust bag: 330 mL
Max Air Flow	1.2 m³/min
Max Sealed Suction (water column)	21 kPa (2,100 mmH ₂ O)
Suction Power	4: 125 W 3: 70 W 2: 45 W 1: 20 W
Dimensions (L x W x H)	1,081 x 114 x 158 mm (42-1/2 x 4-1/2 x 6-1/4")
Net Weight	1.8 - 3.0 kg (4.0 - 6.6 lbs)
Continuous Usage Time (approx.)	4: 25 min 3: 40 min 2: 64 min 1: 128 min with BL4040

CL004G

Cordless Cleaner

Highly durable professional-grade nozzle is equipped with a highly durable motor suitable for professional cleaning tasks and a highly durable brush with three types of bristles for efficient debris removal.

Highly durable motor

Highly durable brush

With the driving force of the electric rotary brush, the cleaner can be pushed with ease.

Floor detection function

The electric rotary brush stops when the nozzle is not in contact with the floor and is driven when the nozzle touches the floor

Dust Capacity

250mL

Mesh Pipe

Sponge Filter

Pre-filter

Reduced noise in the cyclone section

The pre filter and sponge filter reduce wind noise from the mesh pipe.

The electric rotary brush can be attached and detached without tools, making maintenance easy.

CL004GZ

RM 1,562

Cordless Cleaner

40Vmax

VIDEO CLIP

Models and specs may vary by country

CL004G

Standard Equipment:

Nozzle Assembly, Pipe Assembly, Sash Nozzle, Nozzle Holder, High Performance Filter

• GZ : Without Charger & Battery (White)

Optional accessory filter H set

NEW

*Recommended batteries

2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

Not compatible with 8.0Ah batteries

Capacity	Cyclone Type : 250 mL
Max Air Flow	1.0 m³/min
Max Sealed Suction (water column)	20 kPa (2,041 mmH ₂ O)
Suction Power	Mode 4: 110 W 3: 70 W 2: 40 W 1: 20 W High performance filter
Dimensions (L x W x H)	1,094 x 243 x 186 mm (43 x 9-9/16 x 7-3/8")
Net Weight (with battery)	2.2 - 2.8 kg (4.9 - 6.2 lbs.)
Continuous Usage Time (approx.)	Mode 4: 14 min 3: 20 min 2: 40 min 1: 60 min with BL4025

* All recommended selling price (RSP) shown are for reference only (exclude SST).

CL003GA106 | **CL003GA103** | **CL003GZ10** | **CL003GZ04** | **CL003GZ**
 RM 1,964 | RM 1,964 | RM 959 | RM 959 | RM 959

Cordless Cleaner**40Vmax**

*Recommended batteries
 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

CL003GA103/ GZ04**CL003GA106/ GZ10****CL003GZ**


Standard Equipment: Floor Nozzle, Sash Nozzle,
 Sash Nozzle Holder, Pipe, High Performance Filter

- GA106: 1x Standard Charger, 1x 2.0Ah Battery (White)
- GA103: 1x Standard Charger, 1x 2.0Ah Battery (Black)
- GZ10 : Without Charger & Battery (White)
- GZ04 : Without Charger & Battery (Black)
- GZ : Without Charger & Battery (Blue)



Capacity	Cyclone Type : 250 mL
Max Air Flow	1.0 m³/min
Max Sealed Suction (water column)	20 kPa (2,000 mmH ₂ O)
Suction Power	Mode 4: 100 W 3: 60 W 2: 35 W 1: 15 W High performance filter
Dimensions (L x W x H)	1,106 x 113 x 177 mm (43-1/2 x 4-7/16 x 7")
Net Weight	1.9 - 2.5 kg (4.2 - 5.5 lbs)
Continuous Usage Time (approx.)	Mode 4: 16 min 3: 25 min 2: 40 min 1: 80 min with BL4025

DCL284FZB | **DCL284FZW**
 RM 904 | RM 904

Cordless Cleaner**18V****DCL284FZB****DCL284FZW**

Standard Equipment:
 Floor Nozzle, Sash Nozzle, Sash Nozzle
 Holder, Pipe, Easy Shake Off Filter EX

- FZB: Without Charger & Battery (Black)
- FZW: Without Charger & Battery (White)



Capacity	730 mL (24.7 oz)
Max Air Flow	1.2 m³/min
Max Sealed Suction	18 kPa (1,836 mmH ₂ O)
Suction Power with High Performance Filter	Mode 4: 125 W Mode 3: 70 W Mode 2: 45 W Mode 1: 20 W
Dimensions (L x W x H)	485 x 113 x 153 mm (19-1/8 x 4-7/16 x 6")
Net Weight	1.3 - 1.6 kg (2.9 - 3.5 lbs)
Continuous Usage Time (approx.)	38 min with BL1830B at mode 1

DCL286FRFB | **DCL286FZB**
 RM 1,654 | RM 978

Cordless Cleaner**18V**


Standard Equipment:
 Nozzle Assembly, Sash Nozzle, Pipe, Nozzle Holder

- FRFB: 1x Rapid Charger, 1x 3.0Ah Battery
- FZB: Without Charger & Battery



Capacity	Cyclone: 250 mL (8.5 oz)
Max Air Flow	1.0 m³/min
Max Sealed Suction	18 kPa (1,836 mmH ₂ O)
Suction Power	Mode 1: 15 W Mode 2: 35 W Mode 3: 60 W Mode 4: 100 W with High performance filter
Dimensions (L x W x H)	543 x 113 x 177 mm (21-3/8 x 4-7/16 x 7")
Net Weight	1.6 - 1.9 kg (3.5 - 4.2 lbs)
Continuous Usage Time (approx.)	Mode 4: 8 min Mode 3: 15 min Mode 2: 21 min Mode 1: 38min with BL1830B

DCL180FRFW | **DCL180RFB** | **DCL180ZB** | **DCL180Z**
 RM 1,134 | RM 1,134 | RM 442 | RM 442

Cordless Cleaner**18V****DCL180FRFW****DCL180RFB/ ZB****DCL180Z**

Standard Equipment:
 FRFW: Floor Nozzle, Sash Nozzle, Sash Nozzle
 Holder, Pipe, Stay, Easy Shake Off Filter
 RFB / ZB / Z: Floor Nozzle, Sash Nozzle,
 Sash Nozzle Holder, Pipe, Stay, Filter, Prefilter

- FRFW: 1x Rapid Charger, 1x 3.0Ah Battery (White)
- RFB : 1x Rapid Charger, 1x 3.0Ah Battery (Black)
- ZB : Without Charger & Battery (Black)
- Z : Without Charger & Battery (Blue)

Only for DCL180FRFW

**DCL180**

Capacity	650 mL
Max Air Flow	1.4 m³/min
Max Sealed Suction (water column)	4.2 kPa (428 mmH ₂ O)
Suction Power	30 W
Dimensions (L x W x H)	999 x 114 x 152 mm (39-1/4 x 4-1/2 x 6")
Net Weight	1.2 kg (2.7 lbs)
Continuous Usage Time (approx.)	33 min with BL1850B

CL106FDWYW
 RM 792

Cordless Cleaner**12Vmax**

Standard Equipment:
 Floor Nozzle, Sash Nozzle,
 Sash Nozzle Holder, Pipe, Filter, Prefilter

- FDWYW: 1x Standard Charger, 1x 1.5Ah Battery (White)



Capacity	600 mL
Max Air Flow	1.3 m³/min
Max Sealed Suction (water column)	3.1 kPa (316 mmH ₂ O)
Suction Power	19 W
Dimensions (L x W x H)	958 x 100 x 150 mm (37-3/4 x 3-15/16 x 5-7/8")
Net Weight	1.0 kg (2.2 lbs)
Continuous Usage Time (approx.)	21 min with BL1021B

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Cleaning

CL107FDWYW

RM 937

Cordless Cleaner

12Vmax



Standard Equipment:

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Dust Bag, Paper Dust Bag 5pcs (194566-1)

• FDWYW: 1x Standard Charger, 1x 1.5Ah Battery (White)



Capacity	Dust Bag: 500 mL Paper Pack: 330 mL
Max Air Flow	1.4 m³/min
Max Sealed Suction (water column)	5.0 kPa (510 mmH ₂ O)
Suction Power	Max: 32 W High: 20 W Normal: 5 W
Dimensions (L x W x H)	960 x 112 x 150 mm (37-3/4 x 4-3/8 x 5-7/8")
Net Weight	1.1 kg (2.5 lbs)
Continuous Usage Time (approx.)	Normal: 25 min High: 12 min Max: 10 min with BL1021B

CL108FDWYW

RM 895

CL108FDZW

RM 525

Cordless Cleaner

12Vmax



Standard Equipment:

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter, Prefilter

• FDWYW: 1x Standard Charger, 1x 1.5Ah Battery (White)
• FDZW : Without Charger & Battery (White)



Capacity	600 mL
Max Air Flow	1.2 m³/min
Max Sealed Suction (water column)	4.4 kPa (445 mmH ₂ O)
Suction Power	Max: 30 W High: 20 W Normal: 5 W
Dimensions (L x W x H)	956 x 110 x 150 mm (37-5/8 x 4-5/16 x 5-7/8")
Net Weight	1.0 - 1.2 kg (2.3 - 2.7 lbs)
Continuous Usage Time (approx.)	Normal: 33 min High: 16 min Max: 13 min with BL1021B



Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
INTL

Capsule type  One touch switch 	CL001G 40Vmax  Suction Power 125 w	DCL284F 18V  Suction Power 125 w	CL108FD 12Vmax  Suction Power 30 w
Paper bag type  One touch switch 	CL002G 40Vmax  Suction Power 125 w	CL107FD 12Vmax  Suction Power 32 w	
Capsule type  Trigger switch 	DCL180F 18V Only for DCL180FRFW (White)  Suction Power 30 w	CL106FD 12Vmax  Suction Power 19 w	Home Building Built-in Job Light Electronic 3-Speed Electronic 4-Speed
Cyclone unit  One touch switch 	CL004G 40Vmax  Suction Power 110 w	CL003G 40Vmax  Suction Power 100 w	DCL286F 18V  Suction Power 100 w

Screwing / Drilling
Stirring
Hammer Drilling / Chiselling
Grinding / Sanding / Polishing
Cutting
Sawing
Milling / Planing
Fastening / Fixing
Cleaning
Lawn Care / Grass Care
Tree Care / Hedge Care
Transportation
Lights
Comfort / Lifestyle
Specialty Tools
Accessory

Cleaning

UB004CZ

RM 3,354

Battery Powered Backpack Blower



*Not compatible with PDC01



Standard Equipment:
End Nozzle, Flat Nozzle

* CZ: Without Charger & Battery



Air Volume	Boost Mode: 20.9 m³/min	Cruise Control Mode 1: 8.5 Mode 2: 15.2 l Mode 3: 19.7 m³/min
Max Air Velocity	Boost Mode: 80.7 m/s	Cruise Control Mode 1: 33.2 Mode 2: 59.0 l Mode 3: 76.3 m/s
Average Air Velocity	Boost Mode: 67.6 m/s	Cruise Control Mode 1: 27.3 Mode 2: 49.1 l Mode 3: 63.8 m/s
No Load Speed (RPM)	Boost Mode: 23,800	Cruise Control Mode 1: 10,500 Mode 2: 18,000 l 22,500
Dimensions (L x W x H)	460 x 575 x 585 mm (18-1/8 x 22-5/8 x 23")	
Net Weight (with battery)	16.5 - 18.6 kg (36.4 - 41.0 lbs)	
Continuous Usage Time (approx.)	45 - 140 min with PDC1200 cruise control lever	

Accessories (Optional)

End Nozzle 74 Set
Part No. 1914H0-2
RM 89.50



Flat Nozzle Set
Part No. 1914H1-0
RM 106.40



UB001CZ

RM 2,070

Battery Powered Blower



Standard Equipment:
Shoulder Belt (191J48-4),
End Nozzle (412758-3)

* CZ: Without Charger & Battery



WHILE STOCK LAST

Max Air Volume	Boost Mode: 17.6 m³/min
Max Air Velocity	Cruise Control Mode: 0 - 15.0 m³/min
Avg. Air Velocity	Boost Mode: 70 m/s
No Load Speed (RPM)	Cruise Control Mode: 0 - 60 m/s
Dimensions (L x W x H)	Boost Mode: 58 m/s
Net Weight	Cruise Control Mode: 0 - 50 m/s
	Boost Mode: 24,000
	Cruise Control Mode: 0 - 21,000
	960 - 1,060 x 295 x 180 mm (37-3/4 - 41-3/4 x 11-1/2 x 7")
	2.6 - 2.9 kg (5.7 - 6.5 lbs)
Continuous Usage Time (approx.)	Boost Mode: 17 min l Cruise Control Mode: 28 min with PDC01 BL1860B x4
	Boost Mode: 60 min l Cruise Control Mode: 90 min with PDC1200

UB001GM101 | UB001GZ

RM 3,190

RM 1,581

Cordless Blower



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Shoulder Belt (166094-6), End
Nozzle (191P97-7), Adapter Pipe (191L96-5),
Flat Nozzle (197889-6),
Extension nozzle (197888-8)

* GM101: 1x Fast Charger, 1x 4.0Ah Battery
* GZ : Without Charger & Battery



Max Air Volume	Cruise Control Mode: 0 - 13.5 m³/min
Max Air Velocity	Boost Mode: 16.0 m³/min
Blowing Force	Cruise Control Mode: 53 m/s
No Load Speed (RPM)	Boost Mode: 64 m/s
Dimensions (L x W x H)	Cruise Control Mode: 0 - 12 N
Net Weight	Boost Mode: 17 N
	Cruise Control Mode: 0 - 20,000
	Boost Mode: 23,000
	850 - 950 x 167 x 297 mm (33-1/2 - 37-1/2 x 6-9/16 x 11-3/4")
	3.1 - 3.9 kg (6.8 - 8.6 lbs)
Continuous Usage Time (approx.)	Cruise control mode: 12 min with BL4040
	Boost mode (Cumulative operation time): 6 min with BL4040

UB002GZ

RM 731

Cordless Blower



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Nozzle Assembly

* GZ: Without Charger & Battery



NEW

Max Air Volume	Blower: 3.5 - 3.6 m³/min
Max Air Velocity	Vacuum: 2.0 m³/min
Blowing Force	Standard Nozzle: 98 - 99 m/s
No Load Speed (RPM)	Garden Nozzle: 75 - 76 m/s
Dimensions (L x W x H)	Standard Nozzle: 3.1 - 3.2 N
Net Weight	Garden Nozzle: 3.0 - 3.1 N
	0 - 18,000
	515 x 156 x 227 mm (20-1/4 x 6-1/8 x 8-15/16")
	2.0 - 3.5 kg (4.4 - 7.7 lbs.)
Continuous Usage Time (approx.)	Low: 120 min l Med: 60 min l High: 20 min with BL4025 - Blower Mode
	High: 19 min with BL4025 - Vacuum Mode



* All recommended selling price (RSP) shown are for reference only (exclude SST).

DUB363ZV

RM 2,520

Cordless Blower**18V x2**

VIDEO CLIP

Models and specs may vary by country



DUB363



Standard Equipment:
Vacuum Kit, End Nozzle, Pipe,
Hex Wrench

• ZV: Without Charger & Battery



Max Air Volume	13.4 m³/min (473 CFM)
Max Air Velocity	65 m/s
No Load Speed (RPM)	0 - 7,850
Dimensions (L x W x H)	737/ 786/ 836 x 193 x 415 mm (7-7/16 / 31 / 33 x 7-5/8 x 16-3/8")
Net Weight	4.5 - 6.6 kg (9.9 - 14.6 lbs)
Continuous Usage Time (approx.)	75 min (Mode 1) 9.5 min (Mode 2) with BL1860B x2

DUB187Z

RM 1,156

Cordless Blower Vacuum**18V**

VIDEO CLIP

Models and specs may vary by country



DUB187



Standard Equipment:
Dust Bag, Shoulder Harness

• Z: Without Charger & Battery

**Accessories (Optional)****T Shape Vacuum Nozzle**

Part No. GB00000165

RM 37.10



No Load Speed (RPM)	9,000 - 13,500
Max Air Volume (Vacuum)	6.1 m³/min
Max Sealed Suction	3.3 kPa
Dust Bag Capacity	25 L
Max Air Volume (Blower)	4.2 m³/min
Max Air Velocity (Blower)	64.0 m/s
Dimensions (L x W x H)	1,168 x 164 x 416 mm (46 x 6-1/2 x 16-3/8")
Net Weight	3.7 - 4.0 kg (8.2 - 8.8 lbs)
Continuous Usage Time (approx.)	14 min BL1860B batteries Vacuum Mode / Blower Mode

DUB184RT | DUB184Z

RM 1,943

RM 1,103

Cordless Blower**18V**

VIDEO CLIP

Models and specs may vary by country



DUB184



Standard Equipment:
Nozzle, Hex Wrench

• RT: 1x Rapid Charger, 1x 5.0Ah Battery

• Z : Without Charger & Battery



Max Air Volume	13.0 m³/min (459 CFM)
Max Air Velocity	52.1 m/s (116 MPH)
No Load Speed (RPM)	0 - 18,000
Dimensions (L x W x H)	825 x 160 x 285 mm (32-1/2 x 6-5/16 x 11-1/4")
Net Weight	2.5 - 3.0 kg (5.4 - 6.7 lbs)
Continuous Usage Time (approx.)	12 min with BL1860B

DUB185Z

RM 357

Cordless Blower**18V**

Standard Equipment:
Nozzle

• Z: Without Charger & Battery



Max Air Volume	3.2 m³/min
Max Air Velocity	98 m/s
Avg. Air Velocity	81 m/s
Max Sealed Suction	5.8 kPa
No Load Speed (RPM)	0 - 18,000
Dimensions (L x W x H)	517 x 156 x 210 mm (20-3/8 x 6-1/8 x 8-1/4")
Net Weight	1.6 - 2.1 kg (3.5 - 4.6 lbs)
Continuous Usage Time (approx.)	Low: 130 min Med: 50 min High: 21 min with BL1850B

DUB186Z

RM 464

Cordless Blower**18V**

Standard Equipment:
Garden Nozzle (191G09-6)

• Z: Without Charger & Battery



Max Air Volume	3.2 m³/min
Max Air Velocity	68 m/s
Avg. Air Velocity	56 m/s
No Load Speed (RPM)	0 - 18,000
Dimensions (L x W x H)	861 x 156 x 210 mm (34 x 6-1/8 x 8-1/4")
Net Weight	1.6 - 2.1 kg (3.5 - 4.6 lbs)
Continuous Usage Time (approx.)	Low: 130 min Med: 50 min High: 20 min with BL1850B

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
int.

Cleaning

UB100DZ
RM 357

Cordless Blower

12Vmax



Standard Equipment:
Nozzle Assembly (123245-4)

• DZ: Without Charger & Battery



Max Air Volume	2.6 m³/min
Max Air Velocity	75 m/s
Avg. Air Velocity	62 m/s
Max Sealed Suction	4.0 kPa
No Load Speed (RPM)	0 - 15,800
Dimensions (L x W x H)	505 x 155 x 184 mm (19-7/8 x 6-1/8 x 7-1/4")
Net Weight	1.4 - 1.9 kg (3.1 - 4.2 lbs)
Continuous Usage Time (approx.)	Low: 45 min Med: 20 min High: 8 min with BL1016

UB101DZ
RM 464

Cordless Blower

12Vmax



Standard Equipment:
Garden Nozzle (191G09-6)

• DZ: Without Charger & Battery



Max Air Volume	2.6 m³/min
Max Air Velocity	56 m/s
Avg. Air Velocity	45 m/s
No Load Speed (RPM)	0 - 15,800
Dimensions (L x W x H)	849 x 155 x 184 mm (33-1/2 x 6-1/8 x 7-1/4")
Net Weight	1.4 - 1.9 kg (3.1 - 4.2 lbs)
Continuous Usage Time (approx.)	Low: 45 min Med: 20 min High: 7 min with BL1016

UB1103
RM 515

303mm

Blower
• Two tools in one; quickly converts to a vacuum for added versatility.



Standard Equipment:
Nozzle, Dust Bag



Continuous Rating Input	600 W
Max Air Volume	0 - 4.1 m³/min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed (RPM)	0 - 16,000
Dimensions (L x W x H)	479 x 185 x 178 mm (18-7/8 x 7-1/4 x 7")
Net Weight	1.9 - 2.2 kg (4.3 - 4.8 lbs)
Power Supply Cord	2.5 m (8.2 ft)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

AS001G Cordless Dust Blower



Nozzle 13 set

Part No. 191X15-3
RM 11
• For blow-off works.
• For inflating large play pools, etc.



Nozzle 7 set

Part No. 191X13-7
RM 11
• For filter cleaning reach.



Nozzle 3 set

Part No. 191X11-1
RM 10.60
• For cleaning narrow spaces (can be used like an air spray can).



Wide range nozzle set

Part No. 191X19-5
RM 25.30
• For wide range blow-off.



Pinch valve nozzle set

Part No. 191X17-9
RM 15.50
• For inflating/deflating inner tubes and beach balls.



Easy nozzle replacement without tool



Long nozzle set (Optional)

Part No. 191X78-9
RM 59
• For cleaning anchor holes.
• For cleaning narrow spaces that are out of reach.



Filter C complete set (Optional)

Part No. 191X29-2
RM 30.80
• For use of the machine in a dusty environment.



Flexible nozzle complete set (Optional)

Part No. 191X21-8
RM 71.70
• For blowing dust away from OA equipment or narrow spaces where this machine cannot enter.



Rubber attachment 20-30 set (Optional)

Part No. 191X25-0
RM 23.50
• For deflation large play pools and inflatable beds etc.



Rubber attachment 65 set (Optional)

Part No. 191X27-6
RM 24.40
• For deflating futon (bedding) compression bag.

Air vent hose complete set (Optional)

Part No. 191X23-4
RM 131.50
• For inflating/deflating inner tubes and beach balls.

AS001GA105 | AS001GZ03

RM 1,940

RM 935

Cordless Dust Blower

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



VIDEO CLIP
Models and specs
may vary by country



Standard Equipment:

Nozzle 3, Nozzle 7, Nozzle 13,
Pinch Valve Nozzle, Wide Range Nozzle, Filter C

• GA105: 1x Standard Charger, 1x 2.0Ah Battery,
Accessory Bag, Makita Tool Bag (832074-1)
• GZ03 : Without Charger & Battery



Max Blowing Force	Mode: 4: 2.8 N 3: 2.3 N 2: 1.7 N 1: 1.1 N
Max Air Volume	Mode: 4: 1.1 m³/min 3: 1.0 m³/min 2: 0.8 m³/min 1: 0.6 m³/min
Max Sealed Suction	10.3 kPa
Dimensions (L x W x H)	180 x 94 x 248 mm (7-1/8 x 3-11/16 x 9-3/4")
Net Weight	1.5 - 2.3 kg (3.3 - 5.1 lbs)
Continuous Usage Time (approx.)	Mode: 4: 13 min 3: 17 min 2: 25 min 1: 50 min with BL4025

DAS180Z

RM 918

Cordless Dust Blower

18V



Standard Equipment:

Nozzle 3, Nozzle 7, Nozzle 13,
Pinch Valve Nozzle, Wide Range Nozzle

• Z: Without Charger & Battery



Max Blowing Force	Mode: 4: 2.8 N 3: 2.3 N 2: 1.7 N 1: 1.1 N
Max Air Volume	0-1.1 m³/min
Max Air Velocity	0-200 m/s
Max Sealed Suction	10.3 kPa
Dimensions (L x W x H)	179 x 92 x 247 mm (7 x 3-5/8 x 9-3/4")
Net Weight	1.2 - 1.7 kg (2.6 - 3.7 lbs)
Continuous Usage Time (approx.)	Mode: 4: 15 min 3: 20 min 2: 30 min 1: 55 min with BL1860B



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
Power Tools

HW001G

Cordless High Pressure Washer

Accessories (Optional)

Cyclone jet nozzle set
Part No. 197824-4
RM 69.90



A spiral jet is ejected. Suitable for removing stubborn dirt.

Cyclone guard set (Optional)
Part No. 197864-2
RM 122.40



Reduces splash back when cleaning corners with the cyclone jet nozzle.

Variospray nozzle set
Part No. 1912Y4-1
RM 129

Variospray nozzle ext. set
Part No. 1912Y5-9
RM 184




Jet pressure can be adjusted by rotating the nozzle.

Variospray lance set
Part No. 1912Y6-7
RSP TBA



Jet pressure can be adjusted by rotating the nozzle.

Variable nozzle set (Optional)
Part No. 197822-8
RM 66.20



Jet width can be adjusted from 0° to 25° by rotating the front end of the nozzle.

Foam nozzle set (Optional)
Part No. 1912Y2-5
RM 112.60




Detergent can be sprayed as foam.

Wash brush set (Optional)
Part No. 197828-6
RM 47.10




A nozzle equipped with a brush. Useful for washing out dirt while scrubbing with brush.

Rotating brush set (Optional)
Part No. 197831-7
RM 94.20



Three brushes inside rotate slowly when ejecting the jet. Suitable for cleaning light dirt on an exterior wall, car body, bath tub, etc.

Under body spray lance set (Optional)
Part No. 197859-5
RM 207.90



An extra long spray lance with angled nozzle, best for cleaning hard-to-reach areas such as car under body and roof gutter.

Extension pipe set (Optional)

Part No. 197870-7
RM 397.10



Pipes to extend the length of the trigger gun. Three different lengths are available by changing the number of the pipes to be used.

Accessory joint set (Optional)

Part No. 197853-7
RM 40

A joint to connect with a nozzle from other model.



Absorption connector G3/4

with filter
Part No. 122F22-7
RSP TBA



Pipe cleaning hose (Optional)

Part No. 197837-5 (10 m)
RM 278.20

Part No. 197840-6 (15 m)
RM 325

For cleaning and unclogging plumbing and downpipes.



Trigger gun set

Part No. 197842-2
RM 152.80



High pressure extension hose (Optional)

Part No. 197845-6 (5 m)
RM 209.50
Part No. 197847-2 (8 m)
RM 281.50
Part No. 197850-3 (10 m)
RM 419.50

Extension hose to connect the high pressure washer body with the trigger gun.



High pressure hose

Length: 5 m
Part No. 126766-5
RM 102.60



Twist prevention joint set (Optional)

Part No. 197867-6
RM 122.20

Prevents the high-pressure hose from being twisted.



One touch joint set (Optional)

Part No. 197883-8
RM 25.90

For commercial hose connection



Hose assembly set

Length: 3 m
Part No. 1910R1-6
RM 173.50

Part No. 1914A2-9
RSP TBA

A hose assembly to connect a faucet to the product, or the strainer assembly to the product.



Strainer assembly set

Part No. 1910R2-4
RM 217.70

A strainer assembly to supply water from a tank or reservoir. Use the hose assembly to connect to the product.



Self-suction hose set (Optional)

Part No. 197873-1
RM 225

Replace the water hose with this set to supply water from a tank or reservoir.



HW001GZ

RM 4,143

Cordless High Pressure Washer

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah

VIDEO CLIP
Models and specs
may vary by country



HW001G

Standard Equipment:

Trigger Gun Set, High Pressure Hose 5 m, Strainer Assembly Set, Absorption Connector G3/4, Variospray Nozzle Set, Extension, Variospray Lance Set, Cyclone Jet Nozzle Set, Hose Assembly Set

* GZ: Without Charger, Battery & Carrying Case



Max Permissible Pressure 11.5 MPa (115 Bar)

Regular Pressure Mode 1: 3.0 MPa | Mode 2: 5.5 MPa
Mode 3: 8.5 MPa

Max Water Flow 7.0L/min

Regular Flow Mode 1: 3.0 L/min | Mode 2: 4.2 L/min
Mode 3: 5.5 L/min

Pump Speed (RPM) Model 1: 1,870 | Mode 2: 2,580
Mode 3: 3,350

Max Feed Temperature 40 °C

Max Suction Height 1 m

Dimensions (L x W x H) 334 x 383 x 520 mm
(13-1/2 x 15-1/8 x 20-1/2")

Net Weight 10.3 - 13.4 kg (22.7 - 29.5 lbs)

Continuous Usage Time (approx.) 60 min (Mode 1) | 30 min (Mode 2) | 18 min (Mode 3)
with BL4050F x2

DHW080

Cordless High Pressure Washer

Accessories (Optional)

Cyclone jet nozzle set (Optional)
Part No. 197824-4
RM 69.90

Cyclone guard set (Optional)
Part No. 197864-2
RM 122.40

Variospray lance set (Optional)
Part No. 197876-5
RM 145.50

Foam nozzle set (Optional)
Part No. 197886-2
RM 105.30

Wash brush set (Optional)
Part No. 197828-6
RM 47.10

Variable nozzle set
Part No. 197822-8
RM 66.20

Rotating brush set (Optional)
Part No. 197831-7
RM 94.20

Under body spray lance set (Optional)
Part No. 197859-5
RM 207.90

Pipe cleaning hose (Optional)
Part No. 197837-5 (10 m)
RM 278.20
Part No. 197840-6 (15 m)
RM 325

Accessory joint set (Optional)
Part No. 197853-7
RM 40

Trigger gun set
Part No. 197842-2
RM 152.80

High pressure extension hose (Optional)
Part No. 197845-6 (5 m)
RM 209.50
Part No. 197847-2 (8 m)
RM 281.50
Part No. 197850-3 (10 m)
RM 419.50

Extension pipe set (Optional)
Part No. 197870-7
RM 397.10

High pressure hose (Optional)
PVC Part No. 126766-5 (5 m)
RM 102.60
Part No. 123784-4 (10 m)
RM 153.30
Rubber Part No. 123651-3 (10 m)
RM 275.50

Twist prevention joint set (Optional)
Part No. 197867-6
RM 122.20

Trolley (Optional)
Part No. TR00000002
able to stack on for easy loading
RM 927.30

Absorption connector set (Optional)
Part No. 197881-2
RM 25.90

One touch joint set
Part No. 197883-8
RM 25.90

Self-suction hose set
Part No. 197873-1
RM 225

DHW080ZK

RM 3,276

Cordless High Pressure Washer

18V x2



VIDEO CLIP
Models and specs
may vary by country



DHW080

Standard Equipment:

Trigger Gun, High Pressure Hose 5m,
Suction Hose, Cleaner Pin, Storage Box,
Variable Nozzle, Connector, One Touch Joint

• ZK: Without Charger & Battery



Max Permissible Pressure	8.0 MPa
Regular Pressure	High: 5.5 MPa Low: 3.0 MPa
Max Water Flow	380 L/h (6.3 L/min)
Regular Flow	High: 330 L/h (5.5 L/min) Low: 240 L/h (4.0 L/min)
Pump Speed (RPM)	High: 3,450 Low: 2,390
Max Feed Temperature	40°C
Tank	50L
Dimensions (L x W x H)	438 x 218 x 269 mm (17-1/4 x 8-5/8 x 10-5/8")
Net Weight	7.1 - 7.7 kg (15.6 - 17.0 lbs)
Continuous Usage Time (approx.)	Low: 34 min High: 15 min with BL1860B x2

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

TAKITA

Cleaning

DHW180Z01

RM 600

Cordless Pressure Washer

18V

Standard Equipment:

Water Bottle Adapter (LX00000004),
Extension Pipe 350 mm (LX00000049),
Hose 6 m x 8 mm (19.7ft x 5/16") (LX00000079),
5 in 1 Nozzle (LX00000050),
Foam Nozzle (LX00000001),
Filter (LX00000056),
(LX00000060) Strainer,
(LX00000063) Cleaner Pin 0.6

• Z01: Without Charger, Battery & Carrying Case



VIDEO CLIP
Models and specs
may vary by country



DHW180

Regular Pressure	Self-priming, High: 2.0 MPa (20 bar) Low: 0.8 MPa (8 bar) Connection to water supply, High: 2.4 MPa (24 bar) Low: 0.8 MPa (8bar)
Max Water Flow	5.3 L/ min
Regular Flow	Self-priming High: 2.5 L/min Low: 1.5 L/min Connection to water supply High: 2.5 L/min Low: 1.5 L/min
Max Feed Temperature	40 °C
Max Suction Height	2.0 m (6.7 ft)
Dimensions (L x W x H)	419 x 99 x 239 mm (16-1/2 x 3-7/8 x 9-3/8")
Net Weight (with battery)	2.3 - 2.7 kg (5.1 - 6.0 lbs.)
Continuous Usage Time (approx.)	50 min (low) 18 min (high) self-priming with BL1830B

Accessories (Optional)

Foam nozzle
Part No. LX00000001



Plastic bottle adapter
Part No. LX00000004



Angle nozzle
Part No. LX00000002



Wheel brush
Part No. LX00000003



PS001G

Cordless Polisher Scrubber

Brush/ Pad replaceable without touching when using the splash guard.

Main power switch

Brush installation
Press the appliance lightly to the floor and pull the switch trigger.

Accessory removing button

Brush removal
Press the appliance lightly to the floor and pull the switch trigger.

Cleaning wall edges/ tiled-floor joints

You can use the appliance without the splash guard when cleaning baseboards and other wall edges, tiled-floor joints, or grooves.

When using the appliance without the splash guard, always lock the head of the appliance with levers.

Adjustable and easy-to-grip handle design
Handle design for easy pushing by applying force.

Telescopic pipe adjustable with a lever

- The pole length can be adjusted according to the task and the operator's height. (total length: 1,081 - 1,435mm)
- The pole can be fixed at any desired position.

Battery cover

Extension range
354 mm

Springy splash guard
using the splash guard with the brush or pad prevents water or cleaning agent from splashing.

PS001GZ

RM 5,000

Cordless Polisher Scrubber

40Vmax

Standard Equipment:

Floor Pad 200 3pcs
White (1914S5-9) | Red (1914S6-7) | Blue (1914S7-5),
Pad Holder 175 (1914S4-1), Brush 190 Medium (1914T1-4),
Accessory Bag, Splash Guard

• GZ: Without Charger & Battery



NEW

VIDEO CLIP
Models and specs
may vary by country



PS001G

Attachment size	Brush: 190 mm (7-1/2") Floor pad: 200 mm (7-7/8")
Telescopic pole	1,081 - 1,435 mm (42-1/2 - 56-1/2")
No Load Speed (RPM)	High: 600 Med: 350 Low: 150
Dimensions (L x W x H)	1,081 - 1,435 x 204 x 361 mm (42-1/2 - 56-1/2 x 8 x 14-1/4")
Net Weight	4.4 - 5.6 kg (9.7 - 12.3 lbs)
Continuous Usage Time (approx.)	Low: 140 min Med: 50 min High: 30 min with BL4025

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Lawn Care Grass Care



LM002GZ 530 mm (21") RM 6,223

Cordless Lawn Mower

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Blade, Mulching Plug,
Socket Wrench, Rod, Discharge Chute

• GZ: Without Charger & Battery



Max Output	1,900 W
Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	Normal Mode: 2,800 Noise Reduction Mode: 2,300
Propelling Speed	1.5 - 5.0 km/h
Wheel Size	Front / Rear: 230 mm (9")
Dimensions (L x W x H)	1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2")
Net Weight	29.5 - 34.7 kg (65.0 - 76.5 lbs)
Continuous Usage Time (approx.)	95 min (push-drive) / 60 min (self-propelled) Moving Area 3,400 m ² (push-drive) 2,500 m ² (self-propelled) with BL4080F x2

LM004GZ 430 mm (17") RM 2,390

Cordless Lawn Mower

40Vmax



*Recommended batteries 2.0Ah, 2.5Ah,
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah


Accessories (Optional)



Mulching Plug
Part No. 1913H8-0
RM 55.30



Blade
Part No. 1913H4-8
RM 130.40



Mulching Blade
Part No. 1913H6-4
RM 111.90

Standard Equipment:

Socket Wrench, Blade,
Mulching Plug, Grass Catcher

• GZ: Without Charger & Battery



Max Output	740 W
Cutting Width	430 mm (17")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
Grass Catcher Capacity	50 L
No Load Speed (RPM)	3,800
Wheel Diameter	Front: 140 mm (5-1/2") Rear: 165 mm (6-1/2")
Dimensions (L x W x H)	1,390 - 1,440 x 460 x 990 - 1,020 mm (54-3/4 - 56-3/4 x 18-1/8 x 39 - 40-1/4")
Net Weight	15.6 - 18.2 kg (34.4 - 40.1 lbs)
Continuous Usage Time (approx.)	52 min with BL4080F

DLM466Z 460 mm (18") RM 5,390

Cordless Lawn Mower

18V x2



NEW



Standard Equipment:

Mulching Plug, Socket Wrench

• Z: Without Charger & Battery




Max Output	1,400 W
Cutting Width	460 mm (18-1/8")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
Grass Box Capacity	60 L
No Load Speed (RPM)	2,500 - 3,300
Recommended Mowing Area	960 m ² with BL1860B x2
Dimensions (L x W x H)	1,270 - 1,440 x 535 x 915 - 1,110 mm (50 - 56-3/4 x 21 x 36 - 43-3/4")
Net Weight	22.4 - 26.0 kg (49.4 - 57.3 lbs.)
Continuous Usage Time (approx.)	Moving Area 960 m ² or 26 min with BL1860B x2

DLM382Z 380 mm (15") RM 1,765

Cordless Lawn Mower

18V x2



Standard Equipment:

Blade, Mulching Plug, Socket Wrench

• Z: Without Charger & Battery



Max Output	900 W
Cutting Width	380 mm (15")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
Grass Box Capacity	40 L
No Load Speed (RPM)	3,700
Dimensions (L x W x H)	1,380 - 1,410 x 450 x 985 - 1,005 mm (54-1/4 - 55-1/2 x 17-3/4 x 38-3/4 - 39-1/2")
Net Weight	16.2 - 16.9 kg (35.7 - 37.3 lbs)
Continuous Usage Time (approx.)	36 min with BL1860B x2

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Lawn Care | Grass Care

DLM330Z

RM 1,242

Cordless Lawn Mower

18V

VIDEO CLIP

Models and specs may vary by country

DLM330

Standard Equipment:

Blade, Mulching Plug, Wrench

• Z: Without Charger & Battery

Max Output	450 W
Cutting Width	330 mm (13")
Cutting Height	20 - 75 mm (13/16 - 2-15/16")
Grass Box Capacity	30 L
No Load Speed (RPM)	4,300
Dimensions (L x W x H)	1,285-1,350 x 375 x 935-975 mm (50-1/2 - 53 x 14-3/4 x 36-3/4 - 38-3/8")
Net Weight	11.6 - 12.5 kg (25.6 - 27.6 lbs)
Continuous Usage Time (approx.)	Mowing Area 270 m ² or 14 min with BL1840B

DLM230Z 230mm (9")

RM 1,365

Cordless Lawn Mower

18V

VIDEO CLIP

Models and specs may vary by country

DLM230

Standard Equipment:

Blade, Hex wrench, Rod

• Z: Without Charger & Battery

Max Output	560 W
Cutting Width	230 mm
Cutting Height	10 - 55 mm
Grass Box Capacity	20 L
No Load Speed (RPM)	7,000
Dimensions (L x W x H)	860 - 1,105 x 256 x 680 - 920 mm
Net Weight	8.6 - 8.9 kg
Continuous Usage Time (approx.)	Mowing Area 90 m ² or 6 min with BL1830B

ELM3720 370 mm (14-1/2")

RM 1,210

Electric Lawn Mower

• Stays upright for easy maintenance and cleaning.

VIDEO CLIP

Models and specs may vary by country

ELM3720

Standard Equipment:

Blade, Wrench

Continuous Rating Input	1,400 W
Hole Diameter	8 mm (5/16")
Cutting Height	20 - 55 mm (13/16 - 2-3/16")
No Load Speed (RPM)	3,400
Recommended Mowing Area	500 m ²
Grass Box Capacity	40 L
Wheel Size	Front:139 mm (5-1/2") Rear:178 mm (7")
Dimensions (L x W x H)	1,330 x 415 x 890 - 1,120 mm (52-3/8 x 16-3/8 x 35"-44")
Net Weight	11.6 kg (25.6 lbs)

ELM3320 330 mm (13")

RM 1,009

Electric Lawn Mower

• Stays upright for easy maintenance and cleaning.

VIDEO CLIP

Models and specs may vary by country

ELM3320

Standard Equipment:

Blade, Wrench

Continuous Rating Input	1,200 W
Hole Diameter	8 mm (5/16")
Cutting Height	20 - 55 mm (13/16 - 2-3/16")
No Load Speed (RPM)	3,400
Recommended mowing area	400 m ²
Grass Box Capacity	30 L
Wheel Size	Front: 139 mm (5-1/2") Rear: 178 mm (7")
Dimensions (L x W x H)	1,230 x 380 x 870 - 1,110 mm (48-1/2 x 15 x 34-1/4 - 43-3/4")
Net Weight	10.2 kg (22.5 lbs)

UV001GZ 380 mm (15")

RM 5,937

Cordless Scarifier

40Vmax

VIDEO CLIP

Models and specs may vary by country

UV001G

Standard Equipment:

Vertical Cutter, Thatching Blade, Socket Wrench, Grass Catcher

• GZ: Without Charger & Battery

Max Output	1,700 W
Cutting Width	380 mm (15")
Working Depth (Scarifier)	-12 mm (-15/32") to 5 mm (+3/16")
Grass Catcher Capacity	50 L (1,760 oz)
No Load Speed (RPM)	3,200
Dimensions (L x W x H)	1,020 - 1,240 x 680 x 915-1,155 mm (40-1/4 - 48-3/4 x 26-3/4 x 36 - 45-1/2")
Net Weight	18.7 - 23.8 kg (41.2 - 52.5 lbs)
Continuous Usage Time (approx.)	Vertical cutter: moving area 500 m ² (-4 mm depth) or 38 min with BL4080F x2 Thatching blade: moving area 510 m ² (0 mm depth) or 41 min with BL4080F x2



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Battery	Model	Max Output	Handle	Nylon	Plastic	Metal	<i>BL</i> MOTOR	<i>ADT</i>	<i>AFT</i>
	UR201C	1.0kW	Loop	430mm	255 / 305mm	255mm	✓	✓	✓
40Vmax x2	UR012G	2.0kW	Offset bike	480mm	305mm	255 / 305mm	✓	✓	✓
40Vmax	UR014G	1.5kW	Loop	450mm	-	-	✓	-	✓
	UR007G	1.0kW	Loop	430mm	255 / 305mm	255mm	✓	✓	✓
	UR008G			430mm	255 / 305mm	-			
	UR003G	0.55kW	Loop	350mm	255mm	230mm	✓	✓	✓
	UR017G	0.53kW	Loop	330mm	255mm	230mm	✓	✓	✓
18V	DUR190L	240W	Loop	300mm	255mm	230mm	✓	✓	✓
	DUR191L								
	DUR194	230W		280mm	230mm	200mm	-	-	-
	DUR189	240W		300mm	255mm	-	✓	✓	-
	DUR192L	460W		300mm	-	-	✓	-	-
	DUR193	280W		260mm	-	-	-	-	-
12Vmax	UR100D	130W	Loop	260mm	230mm	-	-	-	-

Screwing / Drilling
Stirring
Hammer Drilling / Chiselling
Grinding / Sanding / Polishing
Cutting
Sawing
Milling / Planing
Fastening / Fixing
Cleaning
Lawn Care / Grass Care
Tree Care / Hedge Care
Transportation
Lights
Comfort / Lifestyle
Specialty Tools
Accessory
<i>makita</i> mit

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Lawn Care | Grass Care

UR201CZ

RM 2,878

Battery Powered
Grass Trimmer







WHILE STOCK LAST

Standard Equipment:
Metal Blade, Nylon Cutting Head, Plastic Blade,
Blade Cover (for Metal Blade), Accessory Bag, Hex Wrench,
Box Wrench, Band Assembly

• CZ: Without Charger & Battery



Max Output	1,000 W
Cutting Width	Metal Blade / Plastic Blade: 255 mm (10") Nylon Cutting Head: 430 mm (17")
No Load Speed (RPM)	Metal Blade 3: 0 - 7,000 2: 0 - 5,500 1: 0 - 4,600 Nylon Cutting Head 3: 0 - 5,500 2: 0 - 5,000 1: 0 - 4,600 Plastic Blade (305 mm) 3: 0 - 7,000 2: 0 - 5,500 1: 0 - 4,600 Plastic Blade (255 mm) 3: 0 - 5,500 2: 0 - 5,000 1: 0 - 4,600
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,795 x 400 x 269 mm (70-1/2 x 15-3/4 x 10-5/8")
Net Weight	4.7 kg (10.4 lbs)
Continuous Usage Time (approx.)	Low: 76 min with PDC01 (BL1860B x4) Metal blade with load

UR012GZ02

RM 5,592

Cordless Grass Trimmer

40Vmax x2





VIDEO CLIP
Models and specs
may vary by country



UR012G

Standard Equipment:
Metal Blade, Nylon Cutting Head,
Plastic Blade, Accessory Bag,
Hex Wrench, Box Wrench, Shoulder Belt

• GZ02: Without Charger & Battery




Max Output	2,000 W
Cutting Width	Metal Blade: 305 mm (12") Chisel Blade: 225 mm (8-7/8") Shredder Blade: 270 mm (10-5/8") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 480 mm (18-7/8") Plastic Blade: 305 mm (12")
No Load Speed (RPM)	Metal Blade / Plastic Blade (305 mm): High: 0 - 6,800 Mid: 0 - 5,000 Low: 0 - 3,500 Nylon Cutting Head: High: 0 - 5,000 Mid: 0 - 4,200 Low: 0 - 3,500
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,790 x 680 x 590 mm (70-1/2 x 26-3/4 x 23-1/4")
Net Weight	8.0 - 9.3 kg (17.6 - 20.5 lbs)
Continuous Usage Time (approx.)	Low: 126 min Med: 84 min High: 56 min with BL4050F x2 (Metal Blade)

UR014GZ

RM 3,031

Cordless Grass Trimmer

40Vmax





Standard Equipment:
Nylon Cutting Head, Accessory Bag,
Hex Wrench, Box Driver, Shoulder Belt

• GZ: Without Charger & Battery



Cutting Width	Nylon cutting head: 450 mm (17-3/4")
No Load Speed (RPM)	4,000 - 5,000
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,890 x 330 x 304 mm (74-1/2 x 13x12")
Net Weight	5.5 - 6.7 kg (12.1 - 14.8 lbs)
Continuous Usage Time (approx.)	18 min with BL4050F at normal mode low speed

UR007GZ01

RM 2,878

Cordless Grass Trimmer

40Vmax





VIDEO CLIP
Models and specs
may vary by country



UR007G

Standard Equipment:
Metal Blade, Nylon Cutting Head,
Plastic Blade, Accessory Bag, Hex Wrench,
Box Wrench, Shoulder Belt

• GZ01: Without Charger & Battery



Max Output	1,000 W
Cutting Width	Metal Blade: 255 mm (10") Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed (RPM)	Metal Blade / Plastic Blade (305 mm): High: 0 - 7,000 Mid: 0 - 5,500 Low: 0 - 4,600 Nylon Cutting Head / Plastic Blade (255 mm): High: 0 - 5,500 Mid: 0 - 5,000 Low: 0 - 4,600
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,815 x 396 x 266 mm (71-1/2 x 15-5/8 x 10-1/2")
Net Weight	5.3 - 5.9 kg (11.7 - 13.0 lbs)
Continuous Usage Time (approx.)	Low: 32 min Med: 20 min High: 16 min with BL4050F (2 tooth Metal Blade)

UR008GM101

RM 3,984

Cordless Grass Trimmer

40Vmax





WHILE STOCK LAST

Standard Equipment:
Nylon Cutting Head, Accessory Bag, Hex Wrench

• GM101 : 1x Fast Charger, 1x 4.0Ah Battery
• GZK01 : Without Charger & Battery
• GZ01 : Without Charger & Battery



Max Output	1,000 W
Cutting Width	Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed (RPM)	Nylon Cutting Head: High: 0 - 5,000 Mid: 0 - 4,600 Low: 0 - 4,000 Plastic Blade (305 mm): High: 0 - 6,000 Mid: 0 - 4,600 Low: 0 - 4,000
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,803 x 224 x 300 mm (71 x 8-7/8 x 11-3/4")
Net Weight	5.0 - 5.7 kg (11.0 - 12.6 lbs)
Continuous Usage Time (approx.)	Low: 31 min Med: 19 min High: 13 min with BL4050F (Plastic Blade 305 mm 12")

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Thakita

UR003GZ

RM 2,225

Cordless Grass Trimmer

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Blade Cover, Nylon Cutting Head (198892-0),
Accessory Bag, Hex Wrench, Shoulder Belt

• GZ: Without Charger & Battery



Max Output	550 W
Cutting Width	Metal Blade: 230 mm (9") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High: 0 - 6,500 Mid: 5,300 Low: 3,500
Spindle Size	M10 x 1.25LH
Net Weight	3.9 - 4.5 kg (8.6 - 9.8 lbs)
Work Amount (approx.)	290 m² of area with BL4050F
Continuous Usage Time (approx.)	Low: 92 min Med: 53 min High: 31 min with BL4050F (Nylon Cutting Head)

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Thakita
int

UR017GZ

RM 2,082

Cordless Grass Trimmer

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah



Standard Equipment:

Plastic Blade 255 Set,
Box Driver 16-17, Hex. Wrench 4

• GZ: Without Charger & Battery



Max Output	530 W (with BL4040 battery)
Cutting Width	Metal blade: 230 mm (9") Nylon cutting head: 330 mm (13") Plastic blade: 255 mm (10")
No Load Speed (RPM)	High: 6,500 Med : 5,300 Low: 3,500
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,890 x 362 x 265 mm (74-1/2 x 14-1/4 x 10-3/8")
Net Weight	4.2 - 4.8 kg (9.3 - 10.6 lbs)
Continuous Usage Time (approx.)	High: 20 min Med: 35 min Low: 45 min with BL4040, plastic blade 255 mm (10")

DUR191LRT2

RM 2,610

Cordless Grass Trimmer

18V



Split shaft
for easily carried &
store in car boot



WHILE
STOCK
LAST

Standard Equipment:

Plastic Blade Set (198384-9), Band Assembly,
Accessory Bag, Hex Wrench

• LRT2: 1x Rapid Charger, 2x 5.0Ah Battery



Max Output	240 W
Cutting Width	Nylon Cutting Head: 300 mm (11-3/4") Metal Blade: 230 mm (9") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	3,500 - 6,000
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,836 x 345 x 236 mm (72-1/4 x 13-5/8 x 9-1/4")
Net Weight	3.2 - 3.5 kg (7.1 - 7.7 lbs)
Continuous Usage Time (approx.)	Low: 74 min with BL1860B Plastic blade with load

DUR194ZX1

RM 862

Cordless Grass Trimmer

18V



WHILE
STOCK
LAST

Standard Equipment:

Shoulder Belt, Metal Blade, Hex Wrench,
Box Driver, Accessory Bag, Tool Cover

• ZX1: Without Charger & Battery



Max Output	230 W
Cutting Width	Metal Blade: 200 mm (7-7/8") Plastic Blade: 230 mm (9") Trimmer Head: 280 mm (11")
No Load Speed (RPM)	High: 6,000 Low: 4,500
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,580 x 288 x 236 mm (62-1/4 x 11-3/8 x 9-1/4")
Net Weight	2.6 - 2.9 kg (5.7 - 6.4 lbs)
Continuous Usage Time (approx.)	High: 32 min Low: 61 min with BL1860B Plastic blade with load

DUR189Z

RM 1,114

Cordless Grass Trimmer

18V



Standard Equipment:

Band Assembly, Accessory Bag,
Nylon Cutting Head (198972-2), Hex Wrench

• Z: Without Charger & Battery



Max Output	240 W
Cutting Width	Trimmer Head: 300 mm (11-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High: 6,000 Med: 5,000 Low: 4,000 ADT: 4,000 - 6,000
Spindle Size	M8 x 1.25RH
Dimensions (L x W x H)	1,518-1,618 x 258 x 369 mm (59-3/4 - 63-3/4 x 10-1/8 x 14-1/2")
Net Weight	3.1 - 3.4 kg (6.8 - 7.5 lbs)
Continuous Usage Time (approx.)	Low: 124 min Med: 54 min High: 46 min with BL1860B Nylon cutting head with load *Depends on the density of weeds

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Lawn Care | Grass Care

DUR192LST | DUR192LZ

RM 1,610 | RM 787

Cordless Grass Trimmer

18V



Standard Equipment:
Nylon Cutting Head,
Band Assembly, Hex Wrench

• LST: 1x Standard Charger, 1x 5.0Ah Battery
• LZ: Without Charger & Battery



Max Output	460 W
Cutting Width	Nylon Cutting Head: 300 mm (11-3/4")
No Load Speed (RPM)	High: 0 - 4,500 Low: 0 - 6,000
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,836 x 345 x 236 mm (72-1/4 x 13-5/8 x 9-1/4")
Net Weight	3.2 - 3.5 kg (7.1 - 7.7 lbs)
Continuous Usage Time (approx.)	High: 18 min Low: 34 min with BL1850B 300 mm (11-3/4") nylon cutting head

DUR193Z

RM 610

Cordless Grass Trimmer

18V



Standard Equipment:
Shoulder Harness with Single
Shoulder Strap, Nylon Cord

• Z : Without Charger & Battery



Max Output	280 W
Cutting Width	Nylon Cutting Head: 260 mm (10-1/4")
No Load Speed (RPM)	7,800
Dimensions (L x W x H)	1,248 - 1,436 x 265 x 358 mm (49-1/4 - 56-1/2 x 10-3/8 x 14-1/8")
Net Weight	2.3 - 2.6 kg (5.1 - 5.7 lbs)
Continuous Usage Time (approx.)	25 min with BL1830B Nylon cutting head with load

UR100DZ

RM 568

Cordless Grass Trimmer

12Vmax



Standard Equipment:
Band Assembly, Nylon Cutting Head (198853-0),
Nylon Cord, Accessory Bag, Hex Wrench

• DZ : Without Charger & Battery



Cutting Width	Nylon Cutting Head: 260 mm (10") Plastic Blade: 230 mm (9")
No Load Speed (RPM)	Nylon Cutting Head: 9,000 Plastic Blade: 10,000
Spindle Size	M8 x 1.25 RH
Dimensions (L x W x H)	835 - 1,185 x 267 x 210 - 315 mm (32-7/8 - 46-2/3 x 10-1/2 x 8-1/4 - 12-1/3")
Net Weight	2.1 - 2.3 kg (4.4 - 4.9 lbs)
Continuous Usage Time (approx.)	21 min with BL1041B Nylon cord, with load



* All recommended selling price (RSP) shown are for reference only (exclude SST).

UX01GZ

RM 1,776

Cordless Multi Function Power Head**40Vmax**

VIDEO CLIP

Models and specs may vary by country



UX01G

*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F),
5.0Ah, 8.0Ah



Max Output	1,000 W
No Load Speed (RPM)	High: 0 - 9,700 Med: 0 - 8,200 Low: 0 - 5,700
Dimensions (L x W x H)	1,001 x 320 x 209 mm (39-1/2 x 12-5/8 x 8-1/4")
Net Weight	4.2 - 4.8 kg (9.3 - 10.6 lbs)

Standard Equipment:
Shoulder Harness, Hex Wrench,
Accessory Bag

• GZ: Without Charger & Battery

**DUX60Z**

RM 1,954

Cordless Multi Function Power Head**18V x2**

VIDEO CLIP

Models and specs may vary by country



DUX60

WHILE STOCK LAST

Max Output	600 W
No Load Speed (RPM)	High: 0 - 9,700 Med: 0 - 8,200 Low: 0 - 5,700
Dimensions (L x W x H)	1,011 x 320 x 216 mm (39-3/4 x 12-5/8 x 8-1/2")
Net Weight	4.1 - 8.7 kg (8.9 - 19.2 lbs)
Continuous Usage Time (approx.)	Low: 97 min Med: 35 min High: 21 min with BL1850B x2 Grass Trimmer

Standard Equipment:
Band Assembly, Hex Wrench, Accessory Bag

• Z: Without Charger & Battery

**DUX18RGX4 | DUX18Z**

RM 2,353

RM 1,020

Cordless Multi Function Power Head**18V**

VIDEO CLIP

Models and specs may vary by country



DUX18

*Not compatible with 2.0Ah, 1.5Ah batteries



Max Output	470 W
No Load Speed (RPM)	High: 0 - 9,700 Low: 0 - 6,800
Dimensions (L x W x H)	983 x 318 x 175 mm (38-3/4 x 12-1/2 x 6-7/8")
Net Weight	2.8 - 3.1 kg (6.2 - 6.8 lbs)

Standard Equipment:
Shoulder Harness, Hex Wrench,
Accessory Bag

• RGX4: 1x Rapid Charger, 1x 6.0Ah Battery,
1x Tool Bag, 1x Brushcutter
Attachment EM408MP,
1x Nylon Cutting Head
• Z : Without Charger & Battery



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Accessory

Accessory

Makita
mit

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Speciality
Tools

Accessory

Cordless Multi Function Power Head Optional Attachments

Weeding Attachment
WA400MP
Weeding blade 220 set
Part No. 1913T9-2
RM 1,948.00

Optional:
Weeding blade 80 set
Part No. 1913L6-2
RM 157

Cultivator blade 170 set
Part No. 1913L7-0
RM 175.90

Weeding blade 220 set
Part No. 1913L5-4
RM 161.10



Power brush
BR400MP
Part No. 199323-2
RM 2,833.50

Power sweep
SW400MP
Part No. 199344-4
RM 2,826.40

Blower
UB400MP
Part No. 191F68-4
RM 1,198.20
UB401MP
Part No. 191P75-7
RM 1,190

Rotary scissors
EM407MP
Part No. 191M57-1
RM 4,130

Ground Trimmer
EN424MP
Part No. 1913D1-6
RM 1,317.30

Brushcutter
*EM400MP
Part No. 195657-1
RSP TBA

*EM403MP
Part No. 198760-7
RM 707.10
**For UX01G/ DUX60 only*

Grass Trimmer
EM408MP
Part No. 191N34-9
RM 704.40
EM409MP
Part No. 191N46-2
RM 618.60

String Trimmer
ER400MP
Part No. 196073-0
RM 397.50

Coffee harvester
EJ400MP
Part No. 197163-2
RM 3,000.40

Cultivator
KR400MP
Part No. 195716-1/ 195707-2
RM 1,840.80
KR401MP
Part No. 199185-8
RM 1,708.20

Pole hedge trimmer
EN401MP (Angle adjustable)
Part No. 196341-1
RM 1,949.10

Pole hedge trimmer
EN402MP
Part No. 1912U0-1
RM 1,224.60

Pole saw
EY401MP
Part No. 199925-4
RSP TBA

EY403MP
Part No. 191T41-8
RM 1,117

Edger
EE400MP
Part No. 196752-0
RM 1,003.70

Ground trimmer
EN420MP (Angle adjustable)
Part No. 198061-3
RM 1,904.40

Hedge trimmer
EN410MP (Straight)
Part No. 197742-6
RM 1,042.60

Shaft extension attachment
LE400MP
Part No. 191E23-0
RM 601.90
Length: 1,080 mm (42-1/2")

Attachments		UX01G 40Vmax	DUX60 18V x2	DUX18 18V
Brushcutter	EM402MP ø230mm Metal blade	●	●	●
	EM403MP(Universal guard) ø420mm Nylon cutting head ø2.0	●	●	—
	EM404MP(Universal guard) ø420mm Nylon cutting head ø2.0	●	●	—
	EM405MP(Narrow guard) Universal guard ø420mm / ø2.0	●	●	—
	EM406MP(Narrow guard) Universal guard ø420mm / ø2.0	●	●	—
Grass trimmer	EM408MP(Universal guard) ø300mm Nylon cutting head ø2.0	●	●	●
	EM409MP(Narrow guard) Universal guard ø330mm / ø2.0	●	●	●
Rotary Scissors	EM407MP	●	●	●
Edger	EE400MP	●	●	●
Pole saw	EY402MP Cutting wide: 250mm	●	●	●
	EY403MP Cutting wide: 300mm	●	●	●
Hedge trimmer	EN410MP Straight	●	●	●
	EN401MP Angle adjustment	●	●	●
	EN402MP Angle adjustment	●	●	●

Attachments		UX01G 40Vmax	DUX60 18V x2	DUX18 18V
Ground trimmer	EN420MP Angle adjustment	●	●	●
	EN421MP Angle adjustment	●	●	●
	EN422MP Angle adjustment	●	●	●
	EN424MP	●	●	●
Weeding	WA400MP	●	●	●
Cultivator	KR400MP 220mm	●	●	●
	KR401MP 160mm	●	●	●
Coffee harvester	EJ400MP	●	●	●
Power brush	BR400MP	●	●	●
Power sweep	SW400MP	●	●	●
Blower	UB400MP	●	●	●
	UB401MP Low noise	●	●	●
	UB402MP	●	●	●
Pump	PF400MP	●	●	●
Snow Blower	SN400MP	●	●	●
Shaft extension attachment	LE400MP	●	●	●

* All recommended selling price (RSP) shown are for reference only (exclude SST).

DUM604Z 160 mm (6-5/16")
RM 589

Cordless Grass Shear

18V



Standard Equipment:
Grass Receiver, Blade Cover

• Z: Without Charger & Battery

Cutting Width	160 mm (6-5/16")
Depth Adjustment	15 mm (9/16") 20 mm (13/16") 25 mm (1")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	337 x 177 x 131 mm (13-1/4 x 7 x 5-1/8")
Net Weight	1.4 - 1.8 kg (3.2 - 4.0 lbs)
Continuous Usage Time (approx.)	200 min with BL1850B 250 min with BL1860B

DUM111SYX 110 mm (4-5/16")
RM 882

Cordless Grass Shear

18V



Come with



Hedge Trimmer Blade
Part No. 198408-1
RM 138

Standard Equipment:
Grass Shear Blade 110 mm (191N23-4), Grass Shear Blade 110 mm
Cover (413885-9), Hedge Trimmer Blade 200 mm (198408-1),
Blade Cover Set (195274-7), Oil Vessel (to include hedge trimmer part)

• SYX: 1x Standard Charger, 1x 1.5Ah Battery

Cutting Width	Grass Shear Blade: 110 mm (4-5/16") Hedge Trimmer Blade: 200 mm (7-7/8")
Depth Adjustment	15 mm (9/16") 20 mm (13/16") 25 mm (1")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	330 x 120 x 130 mm (13 x 4-3/4 x 5-1/8")
Net Weight	1.4 - 1.8 kg (3.1 - 4.0 lbs)
Continuous Usage Time (approx.)	220 min with BL1850B

UM600DZ 160 mm (6-5/16")
RM 506

Cordless Grass Shear

12Vmax



Standard Equipment:
Grass Receiver, Blade Cover

• DZ: Without Charger & Battery

Cutting Width	160 mm (6-5/16")
Depth Adjustment	15 mm (9/16") 20 mm (13/16") 25 mm (1")
Strokes Per Minute (SPM)	2,500
Dimensions (L x W x H)	329 x 177 x131 mm (13 x 7 x 5-1/8 ")
Net Weight	1.3 - 1.5 kg (2.8 - 3.3 lbs)
Continuous Usage Time (approx.)	45 min with BL1021B



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory



Tree Care
Hedge Care



UC004GM101 | **UC004GZ** 350 mm (14")
RM 3,678 | RM 2,082

Cordless Chain Saw

40Vmax



*Recommended batteries
2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Cover, Oil supply,
Round File, Box Wrench

• GM101: 1x Fast Charger, 1x 4.0Ah Battery
• GZ : Without Charger & Battery



Guide Bar Length	350 mm (14")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 24.8 m/s (0 - 1,490 m/min) (0 - 4,880 FPM)
Oil Tank Capacity	200 mL
Dimensions (L x W x H)	266 x 194 x 227 mm (10-1/2 x 7-5/8 x 8-15/16")
Net Weight	3.8 - 4.7 kg (8.4 - 10.4 lbs)
Work Amount (approx.)	160 cuts with BL4040 & 90PX chain Cutting 100 x 100 mm Cedar square timber

UC022GZ 350 mm (14")
RM 2,453

Cordless Chain Saw

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah



Standard Equipment:
Guide Bar, Saw Chain, Guide Bar Case,
Wrench, Chain Oil

• GZ: Without Charger & Battery



Guide Bar Length	350 mm (14")
Chain Speed	0 - 25.5 m/s
Chain Oil Tank Volume	200 mL
Dimensions (L x W x H)	430 x 225 x 271 mm (17 x 8-7/8 x 10-5/8")
Net Weight (with battery)	5.1 - 5.4 kg (11.2 - 11.9 lbs)
Work Amount (approx.)	30 cuts with BL4050F Ø 300 mm cedar log with 80 TXL saw chain

UC016GT101 | **UC016GZ** 400 mm (16")
RM 4,742 | RM 2,826

Cordless Chain Saw

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Cover,
Wrench, Chain Oil, Round File

• GT101: 1x Fast Charger, 1x 5.0Ah Battery
• GZ : Without Charger & Battery



Max Output	1,600 W
Guide Bar Length	400 mm (16")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 25.5 m/s (0 - 1,530 m/min) (0 - 5,020 FPM)
Oil Tank Capacity	260 mL
Dimensions (L x W x H)	445 x 234 x 275 mm (17-1/2 x 9-1/4 x 10-7/8")
Net Weight	6.2 - 7.5 kg (13.7 - 16.5 lbs)
Work Amount (approx.)	35 cuts with BL4050F Ø 300 mm Cedar log with 80TXL saw chain

UC030GZ 500 mm (20")
RM 4,140

Cordless Chain Saw

40Vmax



*Recommended batteries
8.0Ah (H)



Standard Equipment:
Guide Bar, Saw Chain, Guide Bar Case,
Wrench, Chain Oil, Round File

• GZ: Without Charger & Battery



Guide Bar Length	500 mm (20")
Chain Pitch	0.325"
Chain Gauge	1.3 mm (0.05") 1.6 mm (0.063")
Chain Speed	0 - 20.0, 24.5, 29.0 m/s
Chain Oil Tank Volume	260 mL
Dimensions (L x W x H)	449 x 232 x 280 mm (17-3/4 x 9-1/8 x 11")
Net Weight (with battery)	4.5 kg (9.9 lbs)
Work Amount (approx.)	28 cuts with BL4080H Ø 400 mm cedar log with 95 TXL saw chain

* All recommended selling price (RSP) shown are for reference only (exclude SST).

DUC406Z 400 mm (16")
RM 2,909

Cordless Chain Saw

18V x2



Standard Equipment:
Saw Chain, Guide Bar,
Guide Bar Cover, Chain Oil, Socket Wrench

• Z: Without Charger & Battery



Guide Bar Length	400 mm (16")
Chain Pitch	9.5 mm (3/8")
Chain Gauge	1.3 mm (0.05")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL (6.8US oz)
Dimensions (L x W x H)	270 - 651 x 205 x 232 mm (10-5/8 - 25-5/8 x 8-1/8 x 9-1/8")
Net Weight	5.1 kg (11.1 lbs)
Work Amount (approx.)	500 cuts with BL1850B x2 50 x 50 mm Cedar timber

DUC356Z 350 mm (14")
RM 2,100

Cordless Chain Saw

18V x2



Standard Equipment:
Saw Chain, Guide Bar,
Guide Bar Cover, Spike Bumper, Chain Oil, Socket Wrench

• Z: Without Charger & Battery



Guide Bar Length	350 mm (14")
Chain Pitch	9.5 mm (3/8")
Chain Gauge	1.1 mm (0.043") or 1.3 mm (0.050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL (6.8 US oz)
Dimensions (L x W x H)	270 - 651 x 205 x 232 mm (10-5/8 - 25-5/8 x 8-1/8 x 9-1/8")
Net Weight	5.1 kg (11.1 lbs)
Work Amount (approx.)	500 cuts with BL1850B x2 50 mm Timber

DUC353Z 350 mm (14")
RM 2,185

Cordless Chain Saw

18V x2



Standard Equipment:
Saw Chain, Guide Bar,
Guide Bar Cover, Chain Oil

• Z: Without Charger & Battery



Guide Bar Length	350 mm (14")
Chain Pitch	9.5 mm (3/8")
Chain Gauge	1.1 mm (0.043") or 1.3 mm (0.050")
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Chain Oil Tank Volume	200 mL (6.8 US oz)
Dimensions (L x W x H)	773 x 215 x 235 mm (30-1/2 x 8-1/2 x 9-1/4")
Net Weight	4.7 kg (10.4 lbs)
Work Amount (approx.)	550 cuts with BL1850B x2 50 mm Timber

DUC254Z001 250 mm (10")
RM 1,670

Cordless Chain Saw

18V



Standard Equipment:
Saw Chain (191T89-0), Guide Bar (191T85-8)

• Z001: Without Charger & Battery



Guide Bar Length	250 mm (10")
Chain Pitch	9.5 mm (3/8")
Chain Gauge	1.1 (0.043") or 1.3 mm (0.050")
Chain Speed	0 - 24 m/s (0 - 1,440 m/min) (0 - 4,720 FPM)
Chain Oil Tank Volume	140 mL (4.8US oz)
Dimensions (L x W x H)	256 x 185 x 190 mm (10-1/8 x 7-1/2 x 7-1/4")
Net Weight	2.8 - 3.3 kg (6.3 - 7.3 lbs)
Work Amount (approx.)	160 cuts with BL1850B 50 mm Cedar timber

DUC307Z 300 mm (12")
RM 1,575

Cordless Chain Saw

18V



*Not compatible with 2.0Ah, 1.5Ah batteries



Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Case

• Z: Without Charger & Battery



Max Output	610 W
Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	7.7 m/s (460 m/min) (1,520 FPM)
Oil Tank Capacity	150 mL
Dimensions (L x W x H)	704 x 214 x 234 mm (27-3/4 x 8-3/8 x 9-1/4")
Net Weight	4.2 - 4.4 kg (9.3 - 9.7 lbs)
Work Amount (approx.)	100 cuts with BL1860B & 90PX chain Cutting 100 x 100 mm Cedar square timber

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory



Tree Care | Hedge Care

UC4051A 400 mm (16")

RM 1,387

153

Electric Chain Saw

• Fast and efficient cutting.



Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Cover, Hook Complete



Continuous Rating Input	1,800 W
Chain Speed per Minute	870 m (2,900 ft)
Guide Bar Length	400 mm (16")
Saw Chain	Pitch 9.5 mm (3/8") Gauge 1.3 mm (0.050")
Dimensions (L x W x H)	505 x 200 x 220 mm (19-7/8 x 7-7/8 x 8-5/8")
Net Weight	5.6 kg (12.3 lbs)
Power Supply Cord	0.3 m (0.98 ft)

UC4041A 400 mm (16")

RM 840

132

UC3541A 350 mm (14")

RM 800

Electric Chain Saw

• Zero emissions and reduced maintenance.



Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Cover, Hook Complete



Continuous Rating Input	1,800 W
Chain Speed per Minute	870 m (2,900 ft)
Guide Bar Length	UC4041A 400 mm (16") UC3541A 350 mm (14")
Saw Chain	Pitch 9.5 mm (3/8") Gauge 1.1 mm (0.043")/ 1.3 mm (0.050")
Dimensions (L x W x H)	455 x 245 x 200 mm (17-7/8 x 9-5/8 x 7-7/8")
Net Weight	4.7 - 4.9 kg (10.4 - 10.6 lbs)
Power Supply Cord	0.3 m (0.98 ft)

UC029G

Cordless Pruning Saw



Automatic chain lubrication minimizes the chance that saw chain will stall due to forgetting to supply chain oil.

Chain oil view window

Retractable oil tank cap knob



Tool-less change and tension adjustment of saw chain

- Simply loosen and re-tighten the lever to automatically adjust the tension of saw chain.
- This easy-to-operate large lever is designed to be pulled up and turned easily.

Retractable guard covers the upper side of guide bar, and opens gradually wider as saw chain cuts deeper in branch.

Lock-off lever accessible from both sides

Guide bar length 150 mm

Rear hand guard

Soft grip

UC029GZ 150 mm (6")

RM 1,750

Cordless Pruning Saw

40Vmax



Accessories (Optional)
Hook complete set
Part No. 1914Y8-5
RM 27.70

Standard Equipment:
Oil Vessel Set, Guide Bar, Saw Chain, File Holder Set, Chain Cover

• GZ: Without Charger & Battery



VIDEO CLIP
Models and specs may vary by country



Max Output	590 W
Guide Bar Length	150 mm (6")
Saw Chain	Gauge: 1.1 mm (0.043") Pitch: 0.325"
Chain Speed	8.0 m/s
Chain Oil Tank Volume	55 mL
Dimensions (L x W x H)	474 x 95 x 255 mm (18-5/8 x 3-3/4 x 10")
Net Weight	1.1 kg (2.4 lbs.)
Work Amount (approx.)	415 cuts with BL4025 Ø 50 mm cypress wood with 80 TXL saw chain

DUC150RT | DUC150Z 150 mm (6")

RM 2,085 | RM 1,250

Cordless Pruning Saw

18V



Standard Equipment:
Saw Chain, Guide Bar, Round File, Chain Oil, Chain Cover, Cutter Chain

• RT: 1x Rapid Charger, 1x 5.0Ah Battery
• Z : Without Charger & Battery



Max Output	320 W
Guide Bar Length	150 mm (6")
Saw Chain	Gauge: 1.1 mm (0.043") Pitch: 0.325"
Chain Speed	8.0 m/s
Chain Oil Tank Volume	55 mL
Dimensions (L x W x H)	408 x 90 x 232 mm (16 x 3-1/2 x 9-1/8")
Net Weight	1.7 - 2.0 kg (3.7 - 4.4 lbs.)
Work Amount (approx.)	210 cuts with BL1830B Ø 50 mm cedar rod with 80 TXL saw chain

* All recommended selling price (RSP) shown are for reference only (exclude SST).

DUC101Z 100 mm (4")

RM 1,009

Cordless Pruning Saw

18V



Standard Equipment:

Saw Chain, Guide Bar, Guide Bar Cover,
File Guide & File, Chain Oil

• Z: Without Charger & Battery



Max Output	320 W
Guide Bar Length	100 mm (4")
Chain Speed	8.0 m/s (480 m/min) (1,570 FPM)
Chain Oil Tank Volume	55 mL
Dimensions (L x W x H)	408 x 90 x 249 mm (16 x 3-1/2 x 9-3/4")
Net Weight	1.6 - 2.0 kg (3.5 - 4.4 lbs)
Work Amount (approx.)	210 cuts with BL1830B & 80 TXL chain Cutting Ø 50 cedar rod

UC100DZ

RM 945

Cordless Pruning Saw

12Vmax



Standard Equipment:

Saw Chain, Guide Bar, Guide Bar Cover,
Round File & File Holder Set, Chain Oil

• DZ: Without Charger & Battery



Max Output	210 W
Guide Bar Length	100 mm (4")
Chain Speed	8.0 m/s (480 m/min) (1,570 FPM)
Chain Oil Tank Volume	55 mL
Dimensions (L x W x H)	383 x 90 x 220 mm (15-1/8 x 3-1/2 x 8-5/8")
Net Weight	1.5 - 1.6 kg (3.3 - 3.5 lbs)
Work Amount (approx.)	73 cuts with BL1021B & 80 TXL chain Cutting Ø 50 cedar rod

New Tool-less change and tension adjustment
of saw chain

- Simply loosen and re-tighten the lever to automatically adjust the tension of saw chain
- This easy-to-operate large lever is designed to be pulled up and turned easily



Accessories (Optional)

Guide Bar Set

Type: 80TXL
Length: 100 mm (4")
Gauge: 1.1 mm (0.043)
Part No. 1910W0-3
RM 111



Saw Chain Set

Type: 80TXL | Number of links: 26
Pitch: 0.325" | Gauge: 1.1mm (0.043)
Part No. 1910V6-4
RM 80.20



UA004GM102 UA004GZ01

RM 4,857


RM 3,300

Cordless Telescopic
Pole Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah

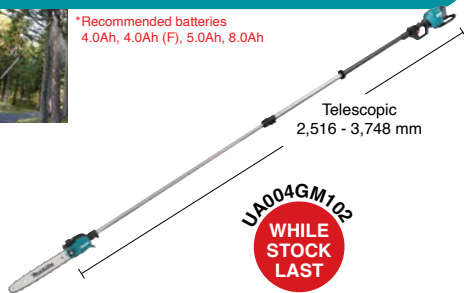

Standard Equipment:

Saw Chain, Guide Bar, Guide Bar Case,
Wrench, Hex Wrench, Band Assembly,
Round File & File Guide Set, Chain Oil

• GM102: 1x Fast Charger, 1x 4.0Ah Battery
• GZ01 : Without Charger & Battery



Max Output	1,500 W
Guide Bar Length	300 mm (12")
Saw Chain	Gauge: 1.1 - 1.3 mm (0.043 - 0.050") Pitch: 3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	2,516 - 3,748 x 156 x 187 mm (99-147 - 1/2 x 6-1/8 x 7-3/8")
Net Weight	7.8 - 9.1 kg (17.2 - 20.1 lbs)
Work Amount (approx.)	153 cuts with BL4040 100 x 100 mm Cedar square timber

UA003GM102 UA003GZ01

RM 4,270

RM 2,693

Cordless Pole Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Saw Chain, Guide Bar, Guide Bar Case,
Wrench, Band Assembly,
Round File & File Guide Set, Chain Oil

• GM102: 1x Fast Charger, 1x 4.0Ah Battery
• GZ01 : Without Charger & Battery



Max Output	1,500 W
Guide Bar Length	300 mm (12")
Saw Chain	Gauge: 1.1 - 1.3 mm (0.043 - 0.050") Pitch: 3/8"
Chain Speed	0 - 20 m/s (0 - 1,200 m/min) (3,940 FPM)
Oil Tank Capacity	160 mL
Dimensions (L x W x H)	2,230 x 156 x 187 mm (88 x 6-1/8 x 7-3/8")
Net Weight	6.1 - 7.4 kg (13.4 - 16.3 lbs)
Work Amount (approx.)	153 cuts with BL4040 100 x 100 mm Cedar square timber

Tree Care | Hedge Care

DUA301ZB

RM 3,045

Cordless Telescopic Pole Saw

18V x2



*Not compatible with 2.0Ah, 1.5Ah batteries

Telescopic 2,530 - 3,762 mm

Standard Equipment:
Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly (191K37-5), Hex Wrench, Round File, Chain Oil

• ZB: Without Charger & Battery


VIDEO CLIP
Models and specs may vary by country
DUA301

Guide Bar Length	300 mm (12")
Max Output	Normal Mode: 1,000 W Torque Boost Mode: 1,400 W
Oil Tank Capacity	160 mL
Saw Chain	Gauge: 1.1/ 1.3 mm (0.043/ 0.050") Pitch: 9.5 mm (3/8")
Chain Speed	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Dimensions (L x W x H)	2,826 - 4,058 x 155 x 191 mm (111 - 160 x 6-1/8 x 7-1/2")
Net Weight	7.8 - 8.5 kg (17.2 - 18.7 lbs)
Work Amount (approx.)	238 cuts with BL1860B x2 100 x 100 Cedar square timber

DUA200Z

200 mm (8")

RM 1,484

Cordless Pole Saw

18V



1,600 - 2,500 mm

Standard Equipment:
Chain Oil, Band Assembly, Guide Bar Case, Saw Chain, Guide Bar

• Z: Without Charger & Battery


VIDEO CLIP
Models and specs may vary by country
DUA200

Guide Bar Length	200 mm (8")
Saw Chain	Gauge: 1.1 mm (0.043") Pitch: 0.325"
Chain Speed	6.7 m/s
Oil Tank Capacity	55 mL
Dimensions (L x W x H)	1,620 - 2,520 x 85 x 134 mm (63-3/4 - 99x 3-3/8 x 5-1/4")
Net Weight (with battery)	3.2 - 3.5 kg (7.1 - 7.7 lbs)
Work Amount (approx.)	600 cuts with BL1860B & 80 TXL chain Cutting Ø 50 mm cedar square timber

UH014GM101 | UH014GZK | UH014GZ

750 mm (29-1/2")

RM 4,598 | RM 3,031 | RM 3,031

Cordless Hedge Trimmer

40Vmax



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

UH014G

Standard Equipment:
Blade Cover, Chip Receiver

• GM101 : 1x Fast Charger, 1x 4.0Ah Battery
• GZK : Without Charger & Battery
• GZ : Without Charger & Battery


VIDEO CLIP
Models and specs may vary by country
UH014G

WHILE STOCK LAST

Blade Length	750 mm (29-1/2")
Strokes Per Minute (SPM)	High: 5,000 Mid: 3,600 Low: 2,000
Tooth Spacing	35 mm (1-3/8")
Max Cutting Capacity	18 mm (11/16")
Dimensions (L x W x H)	1,225 x 270 x 135 mm (48-1/4 x 10-5/8 x 5-5/16")
Net Weight	4.0 - 4.7 kg (8.8 - 10.4 lbs)
Continuous Usage Time (approx.)	Low: 390 min Med: 160 min High: 85 min with BL4040

UH004GZ

600 mm (23-5/8")

RM 2,256

Cordless Hedge Trimmer

40Vmax



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

UH004G

Standard Equipment:
Blade Cover

• GZ: Without Charger & Battery


VIDEO CLIP
Models and specs may vary by country
UH004G

Blade Length	600 mm (23-5/8")
Strokes Per Minute (SPM)	High: 5,000 Mid: 3,600 Low: 2,000
Tooth Spacing	35 mm (1-3/8")
Max Cutting Capacity	23.5 mm (15/16")
Dimensions (L x W x H)	1,120 x 223 x 191 mm (44 x 8-3/4 x 7-1/2")
Net Weight	4.3 - 4.9 kg (9.5 - 10.8 lbs)
Continuous Usage Time (approx.)	Low: 370 min Med: 160 min High: 85 min with BL4040

UH006GM201 | UH006GZ

600 mm (23-5/8")

RM 4,907 | RM 2,256

Cordless Hedge Trimmer

40Vmax



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

UH006G

Standard Equipment:
Blade Cover

• GM201: 1x Fast Charger, 2x 4.0Ah Battery
• GZ : Without Charger & Battery


VIDEO CLIP
Models and specs may vary by country
UH006G


WHILE STOCK LAST

Blade Length	600 mm (23-5/8")
Strokes Per Minute (SPM)	High: 4,000 Mid: 3,000 Low: 2,000
Tooth Spacing	38 mm (1-1/2")
Max Cutting Capacity	25.0 mm (1")
Dimensions (L x W x H)	1,123 x 223 x 191 mm (44-1/2 x 8-3/4 x 7-1/2")
Net Weight	4.4 - 5.0 kg (9.7 - 11.0 lbs)
Continuous Usage Time (approx.)	Low: 195 min Med: 110 min High: 65 min with BL4040

* All recommended selling price (RSP) shown are for reference only (exclude SST).

UH020GZ 500 mm (19-3/4")

RM 1,382

Cordless Hedge Trimmer**40Vmax**

▶ VIDEO CLIP
Models and specs
may vary by country



UH020G

Standard Equipment:
Blade Cover (413L91-8)


• GZ: Without Charger & Battery



Blade Length	500 mm (19-3/4")
Strokes Per Minute (SPM)	4,200
Tooth Spacing	30 mm (1-3/16")
Max Cutting Diameter	20 mm (13/16")
Dimensions (L x W x H)	929 x 207 x 185 mm (36-1/2 x 8-1/8 x 7-1/4")
Net Weight (with battery)	3.0 - 4.2 kg (6.6 - 9.3 lbs)
Continuous Usage Time (approx.)	110 min with BL4040 (under no load)

DUH601Z 600 mm (23-5/8")

RM 1,890

Cordless Hedge Trimmer**18V**

▶ VIDEO CLIP
Models and specs
may vary by country



DUH601

Standard Equipment:
Shear Blade Assembly Set
(199099-1), Blade Cover
(412911-1)

• Z: Without Charger & Battery



WHILE
STOCK
LAST

Blade Length	600 mm (23-5/8")
Strokes Per Minute (SPM)	High: 0 - 4,400 Med: 0 - 3,600 Low: 0 - 2,000
Max Cutting Capacity	23.5 mm (15/16")
Tooth Spacing	35 mm (1 - 3/8")
Dimensions (L x W x H)	1,121 x 192 x 225 mm (44-1/8 x 7-1/2 x 8-7/8")
Net Weight	3.8 - 4.5 kg (8.4 - 9.8 lbs)
Continuous Usage Time (approx.)	Low: 200 min High: 55 min with BL1860B

DUH506Z 500 mm (19-3/4")

RM 998

Cordless Hedge Trimmer**18V**

▶ VIDEO CLIP
Models and specs
may vary by country



DUH506

Standard Equipment:
Blade Cover (413L91-8)

• Z: Without Charger & Battery




Blade Length	500 mm (19-3/4")
Strokes Per Minute (SPM)	4,000
Tooth Spacing	30 mm (1-3/16")
Max Cutting Capacity	20.0 mm (13/16")
Dimensions (L x W x H)	897 x 207 x 185 mm (35-1/4 x 8-1/8 x 7-1/4")
Net Weight	2.5 - 2.9 kg (5.5 - 6.4 lbs)
Continuous Usage Time (approx.)	75 min with BL1860B

DUH507F001 | DUH507Z 500 mm (19-3/4")

RM 1,351

RM 768

Cordless Hedge Trimmer**18V**

Standard Equipment:
Blade cover (413L91-8)

• F001: 1x Charger (DC18WC), 1x 3.0Ah Battery
• Z : Without Charger & Battery



Blade Length	500 mm (19-3/4")
Max Branch Diameter	15 mm (9/16")
Strokes Per Minute (SPM)	2,700
Dimensions (L x W x H)	872 x 209 x 188 mm (34-1/4 x 8-1/4 x 7-3/8")
Net Weight	2.7 - 3.0 kg (6.0 - 6.6 lbs)
Continuous Usage Time (approx.)	77 min with BL1830B

UH353DZ 350 mm (13-3/4")

RM 651

Cordless Hedge Trimmer**12Vmax**

Standard Equipment:
Blade Cover

• DZ: Without Charger & Battery



Blade Length	350 mm (13-3/4")
Tooth Spacing	28 mm (1-1/8")
Max Cutting Capacity	15 mm (9/16")
Strokes Per Minute (SPM)	3,300
Dimensions (L x W x H)	693 x 175 x 165 mm (27-1/4 x 6-7/8 x 6-1/2")
Net Weight	1.9 - 2.1 kg (4.2 - 4.5 lbs)
Continuous Usage Time	40 min with BL1021B

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

* All recommended selling price (RSP) shown are for reference only (exclude SST).

PM001G Cordless Backpack Mist Blower



**Powered by 40Vmax XGT
Li-Ion battery
(two in parallel or one)**

Automatic battery switching
If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to use the other one.

Max spray
distance
14 m



Diffusion cover
You can diffuse the mist by attaching the diffusion cover to the end nozzle.
Part No. 453506-1
RM 7.40



Deflector set (Optional)
You can discharge the mist upward or downward by attaching the deflector to the end nozzle.
Part No. 198248-7
RSP TBA



**Continuous
Usage Time**
with BL4080F x2
High Spraying
Speed Mode
22 min
(approx.)

PM001GZ

RM 3,990

Cordless Backpack Mist Blower

40Vmax



* Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Diffusion cover, Wrench, Nozzle

• GZ: Without Charger & Battery



Chemical Tank Capacity	15.0 L (507 oz)
Max Air Volume	High : 8.6-14.3 m³/min Med : 8.0-11.0 m³/min Low : 7.4-9.0 m³/min
Max Air Velocity	High : 39.5-64.0 m/s Med : 36.5-52.0 m/s Low : 34.0-42.0 m/s
Dimensions (L x W x H)	320 x 600 x 690 mm (without Nozzle) (12-5/8 x 23-5/8 x 27-1/4")
Net Weight	13.2 - 15.7 kg (29.1 - 34.6 lbs)
Continuous Usage Time (approx.)	22 min with BL4080F x2 High spraying speed mode

DUS054Z 5 L

RM 862

Cordless Garden Sprayer

18V



VIDEO CLIP

Models and specs
may vary by country



DUS054



Standard Equipment:
H-Shaped Double Head Nozzle,
Spray Wand, Spray Wand Holder,
Shoulder Belt

• Z: Without Charger & Battery



Max Pressure	0.3 Mpa (3 kgf/cm²)
Chemical Tank	5 L
Hose Length	1.7 m
Spray Wand Length	0.5 - 0.7 m
Nozzle Mounting Thread	G 1/4
Dimensions (L x W x H)	343 x 182 x 368 mm (13-1/2 x 7-1/8 x 14-1/2")
Net Weight	3.2 - 3.5 kg (7.1 - 7.7 lbs)
Work Amount (approx.)	170 L (double outlet mist) 110 L (single outlet mist) 205 L (double outlet stream) 140 L (single outlet stream) with BL1830B

US053DZ

RM 820

Cordless Garden Sprayer

12Vmax



VIDEO CLIP

Models and specs
may vary by country



DUS054
US053D

**WHILE
STOCK
LAST**



Standard Equipment:
H-Shaped Double Head Nozzle, Spray Wand,
Spray Wand Holder, Shoulder Belt

• DZ: Without Charger & Battery



Max Pressure	0.3 Mpa (3 kgf/cm²)
Chemical Tank	5 L
Hose Length	1.7 m
Spray Wand Length	0.5 - 0.7 m
Nozzle Mounting Thread	G 1/4
Dimensions (L x W x H)	343 x 182 x 343 mm (13-1/2 x 7-1/8 x 13-1/2")
Net Weight	2.9 - 3.0 kg (6.4 - 6.6 lbs)
Continuous Usage Time (approx.)	60 L (double outlet mist) 40 L (single outlet mist) 75 L (double outlet stream) 50 L (single outlet stream) with BL1016

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
int

Transportation



DCU601Z

RM 35,937

Battery Powered Wheelbarrow

18V x2



Electric Lift Type



* Z: Without Charger & Battery



Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,400 x 730 x 820 mm (55 x 28-3/4 x 32-1/4")
Net Weight	145 kg (320 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

DCU603Z

RM 23,500

Battery Powered Wheelbarrow

18V x2



Dump Bucket



* Z: Without Charger & Battery



Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed, during operation: 1,480 x 730 x 820 - 1,030 mm (58-1/4 x 28-3/4 x 32-1/4 - 40-1/2")
Net Weight	122 - 124 kg (269 - 273 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

DCU605Z

RM 20,939

Battery Powered Wheelbarrow

18V x2



Flat Bucket



* Z: Without Charger & Battery



Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed, during operation: 1,440 x 730 x 820 - 1,030 mm (56-3/4 x 28-3/4 x 32-1/4 - 40-1/2")
Net Weight	104 - 106 kg (229 - 234 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

DCU180Z Bucket Set/ Carrier Set

RM 5,881

Battery Powered Wheelbarrow

18V



Carrier set **Not included**
Part No. 199116-7



Bucket set **Not included**
Part No. 198494-2

Standard Equipment:
Lock Key, Support Legs,
Wrenches

* Z: Without Charger & Battery



Max Load Capacity	130 kg (290 lbs.)
Traveling Speed	Forward: High: 0 - 3.5 km/h Low: 0 - 1.5 km/h
Reverse Speed	Reverse: 0 - 1 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed During operation: 1,315 x 1,060 x 900 mm (51-3/4 x 41-3/4 x 35-1/2") When carrier is installed/ When stored: 1,110 x 820 x 820 mm (43-3/4 x 32-1/4 x 32-1/4") When bucket is installed During operation: 1,310 x 820 x 900 mm (51-1/2 x 32-1/4 x 35-1/2") When bucket is installed/ when stored: 1,110 x 820 x 820 mm (43-3/4 x 32-1/4 x 32-1/4")
Net Weight	39.3 - 44.8 kg (86.5 - 98.7 lbs)
Continuous Usage Time (approx.)	120 min with BL1860B x2

Battery Powered Wheelbarrow

MAXIMUM
CLIMBING ABILITY

12°

HIGH POWER
BRUSHLESS MOTOR

BL
MOTOR

1 Hand brake lever

- Brake for speed reduction while driving the wheelbarrow.
- Can be used as a parking brake by locking this lever.

2 Electric brake plus Electromagnetic brake

Electric brake

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

Electromagnetic brake

- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0 km.



12°

Max load
capacity

300 kg
on flat ground
(0 - 3 degrees)

180 kg
on slope
(3 - 12 degrees)


Traveling
distance

7.2 km
with BL1860B x4

Traveling speed change


- Selection of 3 Forward speeds and F/R rotation by push button.
- Stepless variable speed control by switch trigger in each range.

Forward	Reverse
3 speeds (1.5/ 3.5/ 5.0 km/h)	1 speed (1.0 km/h)

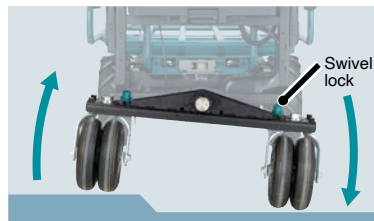

Driving wheels (Front wheels) touch the ground stably

Rear wheel axle is designed to tilt to enable Front wheels (driving wheels) to stably touch the ground for reliable driving even on bumpy road surfaces.

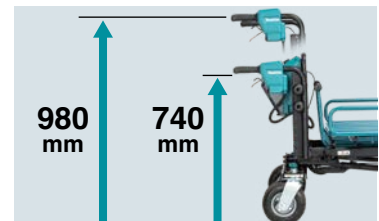

Tool-less handle height adjustment

Handle height can be adjusted according to user's height without tool simply by turning 2 knob screws.



Neutral mode shuts off the power transmission between the motor shaft and the axle in case of no battery installation, low battery capacity or broken motor, enabling to drive the wheelbarrow manually.




Double tires (Rear wheels only) Double tires, each of which rotates independently, improve swivel performance.



Wet Guard / IPX4-compatible High water-resistance allows to operate the machine even if it is wet with water.

Accessories (Optional)



For lawn and pavement



Tire 330 (single) set
Tubed tire, black colour.

Part No. 1911K4-7
RM 575.10



For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.



Gray tire 210 (single) set
Tubed tire, grey colour.

Part No. 1911K6-3
RM 405.30



Gray tire 330 (single) set
Tubed tire, grey colour.

Part No. 1911K5-5
RM 592.60

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
int

Lights



ML012G

RM 1,340

Cordless Bar Light

40Vmax



*Recommended batteries (40Vmax)
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Telescopic Hook, Hand Strap

• Without Charger & Battery



Luminous Flux	High: 1,700 Med: 800 Low: 400 lm
Brightness Setting	3
Dimensions (L x W x H)	972 x 85 x 100 mm (38-1/4 x 3-3/8 x 3-15/16")
Net Weight	2.0 kg (4.4 lbs.)
Continuous Usage Time (approx.)	with BL4025 Low: 20 hrs Med: 9.5 hrs High: 4.5 hrs

DML818

RM 1,280

Cordless Bar Light

18V



Standard Equipment:
Telescopic Hook, Hand Strap

• Without Charger & Battery



Luminous Flux	High: 1,700 Med: 800 Low: 400 lm
Brightness Setting	3
Dimensions (L x W x H)	972 x 80 x 101 mm (38-1/4 x 3-1/8 x 4")
Net Weight	1.7 kg (3.7 lbs.)
Continuous Usage Time (approx.)	with BL1850B Low: 19 hrs Med: 9.5 hrs High: 4 hrs

ML009GX

RM 2,120

Cordless Worklight

40Vmax

18V



*Recommended batteries (40Vmax)
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Anti-glare Film

• Without Charger & Battery

Luminous Flux	High: 10,000 lm Mid: 4,000 lm Low: 2,000 lm
Illuminance	at 1 m from the light source: High: 4,300 Mid: 1,900 Low: 1,000 lx at 3 m from the light source: High: 500 Mid: 230 Low: 110 lx at 5 m from the light source: High: 150 Mid: 75 Low: 55 lx
Dimensions (L x W x H)	248 x 386 x 305 mm (9-3/4 x 15-1/4 x 12")
Net Weight	6.4 - 9.9 kg (14.1 - 21.8 lbs)
Continuous Usage Time (approx.)	Low: 14 hrs Mid: 6.5 hrs High: 2.4 hrs with BL4040 x2

ML005GX

RM 1,300

Cordless Worklight

40Vmax

18V



*Recommended batteries (40Vmax)
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Anti-glare Film

• Without Charger & Battery

Luminous Flux	High: 3,600 lm Mid: 1,800 lm Low: 900 lm
Illuminance	at 1 m from the light source: High: 2,100 Mid: 1,000 Low: 500 lx at 3 m from the light source: High: 230 Mid: 110 Low: 60 lx at 5 m from the light source: High: 90 Mid: 40 Low: 20 lx
Lighting Coverage	Front: 6.0 m Sides: 6.4 m
Dimensions (L x W x H)	248 x 309 x 296 mm (9-3/4 x 12-1/8 x 11-5/8")
Net Weight	4.9 - 6.5 kg (10.8 - 14.3 lbs)
Continuous Usage Time (approx.)	Low: 15 hrs Mid: 7.5 hrs High: 3.5 hrs with BL4040

DML811 (GBDDML811)

RM 1,260

Cordless Worklight

18V



Standard Equipment:

AC Power Cord

• Without Charger & Battery

Luminous Flux	High: 3,000 lm Mid: 1,500 lm Low: 750 lm
illuminance	at 1 m from the light source: 1,800 / 800 / 350 lx at 3m from the light source: 200 / 100 / 40 lx at 5m from the light source: 85 / 40 / 17 lx
Dimensions (L x W x H)	249 x 302 x 271 mm (9-3/4 x 11-7/8 x 10-5/8")
Net Weight	4.1-4.8 kg (9.0-10.5 lbs)
Continuous Usage Time (approx.)	13 hrs with BL1860B Low mode

DML805 (GBDDML805)

RM 770

Cordless and Corded LED Worklight

18V



• Without Charger & Battery

Luminous Flux	Hi: 750 lm, Lo: 450 lm
illuminance	at 0.5 m from the light source Hi: 1,150 lx, Lo: 750 lx at 1m from the light source Hi: 300 lx, Lo: 200 lx 214 x 261 x 328 mm (8-3/8 x 10-1/4 x 12-7/8")
Dimensions (L x W x H)	214 x 261 x 328 mm (8-3/8 x 10-1/4 x 12-7/8")
Net Weight	2.3 - 2.7 kg (5.1 - 5.9 lbs)
Continuous Usage Time (approx.)	10.5 hrs with BL1850B

ML007G (TWAML007G)

RM 750

Cordless Flashlight

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Hand strap

• Without Charger & Battery



Luminous Flux	Spot: 600 lm Flood: 1,000 lm Spot-Flood: 1,250 lm
Illuminance	Spot: 82,000 lx Flood: 520 lx Spot-Flood: 60,000 lx
Dimensions (L x W x H)	330 x 120 x 133 mm (13 x 4-3/4 x 5-1/4")
Net Weight	1.6 - 2.9 kg (3.5 - 6.4 lbs)
Continuous Usage Time (approx.)	Spot mode: 10 hrs Spot-Flood mode: 7.5 hrs Flood mode: 10 hrs Strobe mode: 10 hrs with BL4040

DML814

RM 1,700

Cordless Worklight

18V



Spot lighting



Area lighting



Standard Equipment:

Shoulder Belt, Tool Bag

• Without Charger & Battery

Luminous Flux	High: 3,000 Mid: 1,700 Low: 900 lm
Illuminance	at 1m from the light source: High: 1,250 Mid: 750 Low: 400 lx at 3m from the light source: High: 130 Mid: 80 Low: 40 lx at 5m from the light source: High: 50 Mid: 30 Low: 15 lx
Lighting Coverage	Front: 4.7m Sides: 5.6m
Dimensions (L x W x H)	Folding Position: 260 x 216 x 1,000 mm (10-1/4 x 8-1/2 x 39-3/8") Operating Position (Max Height): 573 x 658 x 1,250 - 2,240 mm (22-1/2 x 26 x 49-1/4 - 88")
Net Weight	7.4 - 8.1 kg (16.3 - 17.9 lbs)
Continuous Usage Time (approx.)	Low: 10 hrs Med: 5.5 hrs High: 3 hrs with BL1850B



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Lights

ML001G (AUAML001G)

RM 200

Cordless LED Flashlight

40Vmax



*Recommended batteries

2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Strap Hook

• Without Charger & Battery

Luminous Flux	160 lm
illuminance	at 1 m from the light source: 3,000 lx
Dimensions (L x W x H)	281 x 88 x 121 mm (11-1/8 x 3-1/2 x 4-3/4")
Net Weight	1.0 - 1.3 kg (2.2 - 2.9 lbs)
Continuous Usage Time (approx.)	55 hrs with BL4040

DML815 (AUADML815)

RM 160

Cordless LED Flashlight

18V



*Recommended batteries

2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:

Strap Hook

• Without Charger & Battery


Luminous Flux	160 lm
illuminance	at 1 m from the light source: 3,000 lx
Dimensions (L x W x H)	272 x 79 x 116 mm (10-3/4 x 3-1/8 x 4-9/16")
Net Weight	0.26 - 0.93 kg (0.57 - 2.05 lbs)
Continuous Usage Time (approx.)	54 hrs with BL1860B

DML808 (AUADML808)

RM 280

Cordless Flashlight

18V



VIDEO CLIP

Models and specs may vary by country



DML808
ML106



• Without Charger & Battery

Luminous Flux	190 lm
illuminance	170 - 4,500 lx at 1 m from the light source
Dimensions (L x W x H)	297 x 79 x 119 mm (11-3/4 x 3-1/8 x 4-11/16")
Net Weight	0.73-1.09 kg (1.6-2.4 lbs)
Continuous Usage Time (approx.)	26 hrs with BL1850B

ML106 (AUAML106)

RM 270

Cordless Flashlight

12Vmax



VIDEO CLIP

Models and specs may vary by country



DML808
ML106



Standard Equipment:

Strap Hook

• Without Charger & Battery

Luminous Flux	190 lm
illuminance	at 1 m from the light source 170 - 4,500 lx
Dimensions (L x W x H)	271 x 66 x 93 mm (10-5/8 x 2-5/8 x 3-5/8")
Net Weight	0.61 - 0.78 kg (1.3 - 1.7 lbs)
Continuous Usage Time (approx.)	12 hrs with BL1041B

ML002G (TWAML002G)

RM 540

Cordless Worklight

40Vmax



*Recommended batteries

2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:

Strap Hook

• Without Charger & Battery

Main Light (on bar side)	Luminous flux (Full brightness): 710 lm illuminance (Full brightness): 340 lx Luminous flux (Half brightness): 340 lm illuminance (Half brightness): 310 lx
Sub Light (on top side)	Luminous flux: 130 lm illuminance: 1,900 lx
Dimensions (L x W x H)	376 x 86 x 126 mm (14-3/4 x 3-3/8 x 5")
Net Weight	1.2 - 1.5 kg (2.7 - 3.3 lbs)
Continuous Usage Time (approx.)	51 hrs with BL4040

DML807 (AUBDML807)
RM 440

Cordless LED Worklight

18V



• Without Charger & Battery




Main light (on bar side)	Luminous flux (Full brightness): 710 lm Illuminance (Full brightness): 340 lx Luminous flux (Half brightness): 340 lm Illuminance (Half brightness): 310 lx
Sub light (on top side)	Luminous flux: 130 lm Illuminance: 1,900 lx
Dimensions (L x W x H)	414 x 79 x 155 mm (16-1/4 x 3-1/8 x 6-1/8")
Net Weight	0.72-1.1 kg (1.6-2.4 lbs)
Continuous Usage Time (approx.)	43 hrs with BL1850B

ML104 (AUAML104)
RM 420

Cordless LED Worklight

12Vmax



• Without Charger & Battery



Main light (on bar side)	Luminous flux (Full brightness): 710 lm Illuminance (Full brightness): 340 lx
Sub light (on top side)	Luminous flux: 130 lm Illuminance: 1,900 lx
Dimensions (L x W x H)	414 x 66 x 132 mm (16-1/4 x 2-5/8 x 5-3/16")
Net Weight	0.61 - 0.78 kg (1.4-1.7 lbs)
Continuous Usage Time (approx.)	19 hrs with BL1041B

ML006GX
RM 300

Cordless Flashlight

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah,
4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Shoulder Strap

• Without Charger & Battery

Luminous Flux	High: 500 l Mid: 250 l Low: 100 lm
Illuminance	at 0.5m from the light source: High: 800 l Mid: 400 l Low: 180 lx
Dimensions (L x W x H)	275 - 408x 85 x 148 mm (10-7/8 - 16 x 3-3/8 x 5-7/8")
Net Weight	1.1 - 1.7 kg (2.4 - 3.8 lbs)
Continuous Usage Time (approx.)	Low: 82 hrs l Med: 40 hrs High: 20 hrs with BL4040

DML816X
RM 270

Cordless Flashlight

18V



Standard Equipment:
Shoulder Strap

• Without Charger & Battery

Luminous Flux	High: 500 l Mid: 250 l Low: 100 lm
illuminance	at 0.5m from the light source: High: 800 l Mid: 400 l Low: 180 lx
Dimensions (L x W x H)	267 - 400 x 79 x 127 mm (10-1/2 - 15-3/4 x 3-1/8 x 5")
Net Weight	0.70-1.1 kg (1.5-2.4 lbs)
Continuous Usage Time (approx.)	Low: 75 hrs l Med: 34 hrs High: 20 hrs with BL1860B

DML801 (DEBDML801)
RM 260

Cordless LED Flashlight

18V



• Without Charger & Battery

Dimensions (L x W x H)	380 x 79 x 116 mm (15 x 9-11/16 x 4-9/16")
Net Weight	0.61 - 0.98 kg (1.4 - 2.2 lbs)
Continuous Usage Time (approx.)	Full brightness: 20 hrs with BL1860B Half brightness: 48 hrs with BL1860B

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
int


Lights

ML011G | DML817 | ML107

Cordless Worklight

Three lighting modes

Equipped with 2 LEDs, one for sidelighting and the other for uplighting, for wide-angle illumination.

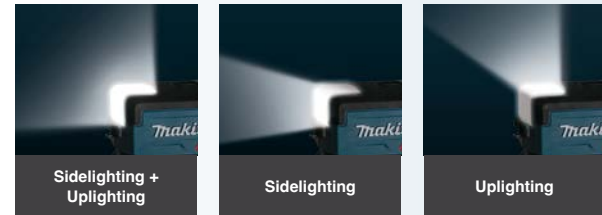

Mode memory function
The appliance saves the lighting mode at the time when turned off by press and holding the light switch button.
*This mode is remembered even if the battery is removed after that.



USB

USB output port

- ML011G/ DML817: 1 port (Type A for DC5V/ 2.4A)
ML107 : 1 port (Type A for DC5V/ 2.1A)
- With Auto-off function (after 30 minutes of no operation).
 - With Output indication lamp.

Also can be used for downlighting

With optional "Strap with hook" fastened to the two Strap holes on the appliance, the light can be used for downlighting by hanging it upside down.

Max luminous flux	
ML011G DML817	300 lm
ML107	200 lm



LED light
Daylight white LED (with colour temperature of 5,000 K).



Supplied with Warm white lamp shade
Allowing for changing to warm white tone lighting (with color temperature of 2,500 K), which has a high relaxing effect.

ML011G

RM 250

Cordless Worklight

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Lamp Shade (GM00002457)

• Without Charger & Battery

Luminous Flux	Side lighting + Up lighting: 300 lm Side lighting only/ Up lighting only: 150 lm with Lamp shade Side lighting + Up lighting: 300 lm Side lighting only/ Up lighting only: 100 lm
Illuminance	at 0.5 m from the light source Side lighting + Up lighting: 240 lx Side lighting only/ Up lighting only: 190 lx at 0.5 m from the light source, with Lamp shade Side lighting + Up lighting: 160 lx Side lighting only/ Up lighting only: 130 lx
Dimensions (L x W x H)	107 x 77 x 50 mm (4-1/4 x 3 x 2")
Net Weight	0.19 kg (0.42 lbs)
Continuous Usage Time (approx.)	37 hours at 300 lm, 64 hours at 150 lm with BL4040

DML817

RM 230

Cordless Worklight

18V



Standard Equipment:
Lamp Shade (GM00002457)

• Without Charger & Battery

Luminous Flux	Side lighting + Up lighting: 300 lm Side lighting only/ Up lighting only: 150 lm with Lamp shade Side lighting + Up lighting: 200 lm Side lighting only/ Up lighting only: 100 lm
Illuminance	at 0.5 m from the light source Side lighting + Up lighting: 240 lx Side lighting only/ Up lighting only: 190 lx at 0.5 m from the light source, with Lamp shade Side lighting + Up lighting: 160 lx Side lighting only/ Up lighting only: 130 lx
Dimensions (L x W x H)	107 x 77 x 50 mm (4-1/4 x 3 x 2")
Net Weight	0.21 kg (0.46 lbs)
Continuous Usage Time (approx.)	28 hours at 300 lm, 49 hours at 150 lm with BL1860B

ML107

RM 200

Cordless Worklight

12Vmax




Standard Equipment:
Lamp Shade (GM00002476)

• Without Charger & Battery

Luminous Flux	Side lighting + Up lighting: 200 lm Side lighting only/ Up lighting only: 100 lm with Lamp shade Side lighting + Up lighting: 120 lm Side lighting only/ Up lighting only: 55 lm
Illuminance	at 0.5 m from the light source Side lighting + Up lighting: 175 lx Side lighting only/ Up lighting only: 130 lx at 0.5 m from the light source, with Lamp shade Side lighting + Uplighting: 100 lx Side lighting only/ Up lighting only: 75 lx
Dimensions (L x W x H)	92 x 54 x 47 mm (3-5/8 x 2-1/8 x 1-7/8")
Net Weight	0.13 kg (0.29 lbs)
Continuous Usage Time (approx.)	17 hours at 200 lm, 29 hours at 100 lm with BL1041B

LIGHTING COVERAGE*

*measured in accordance with ANSI

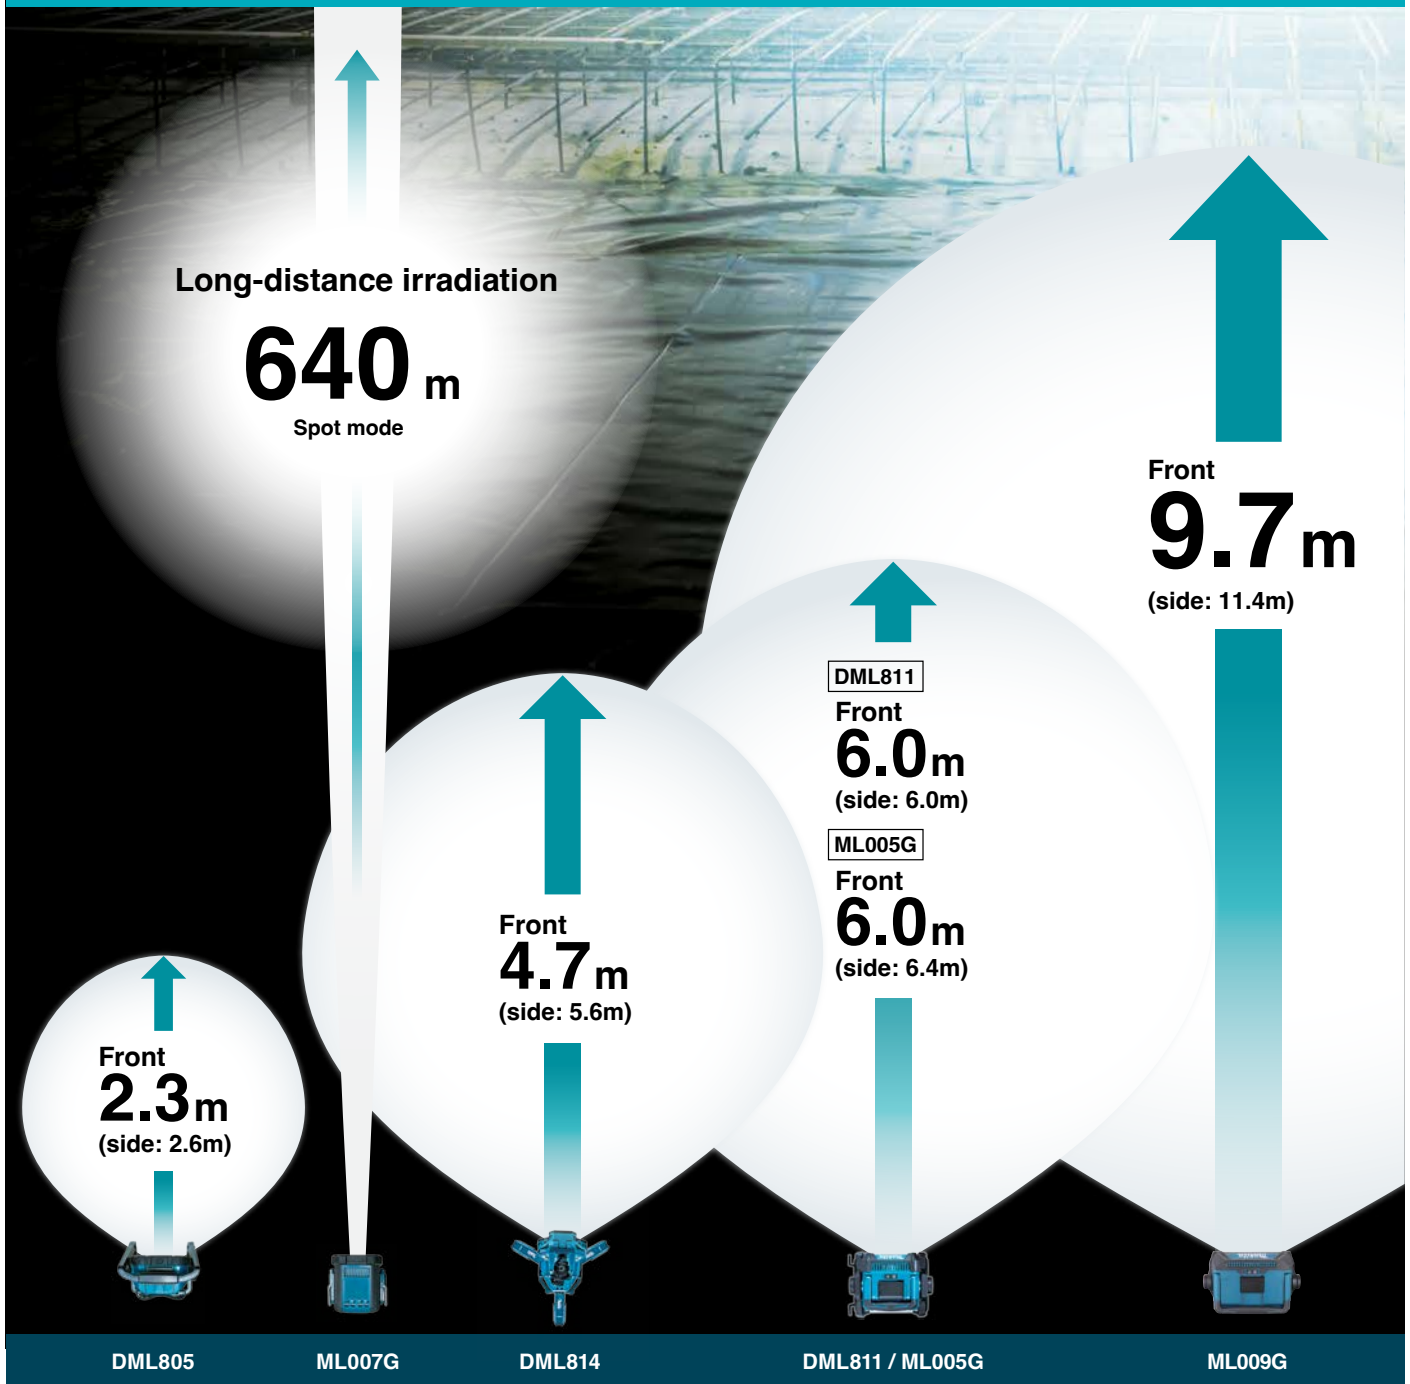

Luminous flux



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
int

Product Comparison List

	ML012G	40Vmax	DML818	18V
Model				
Continuous Usage Time	ML012G with BL4025 High / Med. / Low: 4.5 / 9.5 / 20 hrs		DML818 with BL1850B High / Med. / Low: 4 / 9.5 / 19 hrs	
Illuminance	At 1.0 m from the light source, with all 42 LEDs on High / Med. / Low: 600 / 300 / 100 lx		At 1.0 m from the light source, with all 42 LEDs on High / Med. / Low: 600 / 300 / 100 lx	
Luminous Flux	High / Med. / Low: 1,700 / 800 / 400 lm		High / Med. / Low: 1,700 / 800 / 400 lm	
Net Weight	2.0 kg (4.4 lbs)		1.7 kg (3.7 lbs)	

	ML009G	40Vmax 18V	ML005G	40Vmax 18V	DML811	18V AC	DML805	18V AC
Model								
Continuous Usage Time	with BL4040 x2 High / Med. / Low: 2.4 / 6.5 / 14 hrs		with BL4040 High / Med. / Low: 3.5 / 7.5 / 15 hrs		with BL1850B High / Med. / Low: 2.7 / 5.5 / 11 hrs		with BL1850B High / Low: 8.5 / 17 hrs	
Illuminance	At 1 m from the light source High / Med. / Low: 4,900 / 1,900 / 1,000 lx		At 1 m from the light source High / Med. / Low: 2,100 / 1,000 / 500 lx		At 1 m from the light source High / Med. / Low: 1,800 / 800 / 350 lx		At 1 m from the light source High / Low: 300 / 200 lx	
Luminous Flux	High / Med. / Low: 10,000 / 4,000 / 2,000 lm		High / Med. / Low: 3,600 / 1,800 / 900 lm		High / Mid / Low: 3,000 / 1,500 / 750 lm		High / Low: 750 / 450 lm	
Net Weight	6.4 - 9.9 kg (14.1 - 21.8 lbs)		4.9 - 6.5 kg (10.8 - 14.3 lbs)		4.1 - 4.8 kg (9.0 - 10.5 lbs)		2.3 - 2.7 kg (5.1 - 5.9 lbs)	

	ML007G	40Vmax	ML001G	40Vmax	DML815	18V	DML808	18V
Model	 XPT							
Continuous Usage Time	with BL4040 Spot mode / Spot-Flood mode / Flood mode / Strobe mode: 10 / 7.5 / 10 / 10 hrs		with BL4040 55 hrs		with BL1860B 54 hrs		with BL1860B 32 hrs	
Illuminance	Spot / Flood / Spot-Flood: 82,000 / 520 / 60,000 lx		At 1 m from the light source 3,000 lx		At 1 m from the light source 3,000 lx		At 1 m from the light source 170 - 4,500 lx	
Luminous Flux	Spot / Flood / Spot-Flood: 600 / 1,000 / 1,250 lm		160 lm		160 lm		190 lm	
Net Weight	1.6 - 2.9 kg (3.5 - 6.4 lbs)		0.28 - 1.3 kg (0.62 - 2.9 lbs)		0.26 - 0.93 kg (0.57 - 2.05 lbs)		0.73 - 1.09 kg (1.6 - 2.4 lbs)	

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Product Comparison List

Model	ML106 12Vmax 	ML002G 40Vmax 	DML807 18V 	ML104 12Vmax 	Screwing / Drilling
	Continuous Usage Time	with BL1041B 12 hrs	with BL4040 Main (full) / Sub (on top): 16 / 51 hrs	with BL1850B Main (full) / Sub (on top): 23 / 36 hrs	
	Illuminance	At 1 m from the light source 170 - 4,500 lx	Main (full / half): 340 / 310 lx Sub (on top side): 1,900 lx	Main (full / half): 340 / 310 lx Sub (on top side): 1,900 lx	
	Luminous Flux	190 lm	Main (full / half): 710 / 340 lm Sub (on top side): 130 lm	Main (full / half): 710 / 340 lm Sub (on top side): 130 lm	
	Net Weight	0.61 - 0.78 kg (1.3 - 1.7 lbs)	1.2 - 1.5 kg (2.6 - 3.3 lbs)	0.72 - 1.1 kg (1.6 - 2.4 lbs)	
Model	ML006G 40Vmax 	DML816 18V 	DML801 18V 	ML011G 40Vmax 	Milling / Planing Fastening / Fixing Cleaning Lawn Care / Grass Care Tree Care / Hedge Care Transportation
	Continuous Usage Time	with BL4040 High / Med. / Low: 20 / 40 / 82 hrs	with BL1860B High / Med. / Low: 17 / 34 / 75 hrs	with BL1860B Full / Half: 20 / 48 hrs	
	Illuminance	At 0.5 m from the light source High / Med. / Low: 800 / 400 / 180 lx	At 0.5 m from the light source High / Med. / Low: 800 / 400 / 180 lx	At 0.5 m from the light source Full / Half: 400 / 200 lx	
	Luminous Flux	High / Med. / Low: 500 / 250 / 100 lm	High / Med. / Low: 500 / 250 / 100 lm	Full / Half: 240 / 120 lm	
	Net Weight	1.1 - 1.7 kg (2.4 - 3.8 lbs)	0.70 - 1.1 kg (1.5 - 2.4 lbs)	0.61 - 0.98 kg (1.4 - 2.2 lbs)	
Model	DML817 18V 	ML107 12Vmax 	DML814 18V 		Lights Comfort / Lifestyle Specialty Tools Accessory
	Continuous Usage Time	with BL1860B 300 lm / 150 lm 28 hours / 49 hours	with BL1041B 200 lm / 100 lm 17 hours / 29 hours	with BL1850B High / Med. / Low: 3 / 5.5 / 10 hrs	
	Illuminance	At 0.5 m from the light source Side lighting + Up lighting 240 lx Side lighting only/ Up lighting only 190 lx	At 0.5 m from the light source Side lighting + Up lighting 175 lx Side lighting only/ Up lighting only 130 lx	At 1 m from the light source High / Med. / Low: 1,250 / 750 / 400 lx	
	Luminous Flux	Side lighting + Up lighting 300 lm Side lighting only/ Up lighting only 150 lm	Side lighting + Up lighting 200 lm Side lighting only/ Up lighting only 100 lm	High / Med. / Low: 1,250 / 750 / 400 lx	
	Net Weight	0.21 kg (0.46 lbs)	0.13 kg (0.29 lbs)	7.4 - 8.1 kg (16.3 - 17.9 lbs)	

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stringing

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Speciality
Tools

Accessory




Comfort Lifestyle



CF003GZ

RM 2,296

Cordless Fan



*Recommended batteries
(40Vmax) 2.0Ah, 2.5Ah,
4.0 Ah (F), 5.0 Ah,
8.0 Ah



Standard Equipment:
AC Adaptor, Power Supply Cord UK

* GZ: Without Charger & Battery



DCF203Z

RM 1,189

Cordless Fan




* Z : Without Charger & Battery



DCF102Z

RM 631

Cordless Fan



* Z : Without Charger & Battery



CF101DZ

RM 600

Cordless Fan



* Z: Without Charger & Battery



Fan Diameter	450 mm (17-3/4")
Max Air Velocity	96 - 300 m/min
Air Flow	38 - 120 m³/min
Dimensions (L x W x H)	312 x 633 x 770 mm (12-1/4 x 25 x 30-1/4")
Net Weight	7.9 - 10.5 kg (17.4 - 23.1 lbs)
Continuous Usage Time (approx.)	220 min with oscillation max air speed with BL4080F

Fan Diameter	235 mm (9-1/4")
Max Air Velocity	High: 190m/ min Med: 150m/ min Low: 120m/ min
Air Flow	High: 8.2m³/ min Med: 6.5m³/ min Low: 5.2m³/ min
Dimensions (L x W x H)	140 x 333 x 447 mm (5-1/2 x 13 x 16-1/2")
Net Weight	1.9 - 2.6 kg (4.2 - 5.6 lbs)
Continuous Usage Time (approx.)	Low: 1,010 min Med: 650 min High: 410 min with BL1860B

Fan Diameter	180 mm (7-1/8")
Air Flow	High: 4.6 L/min Med: 3.8 L/min Low: 3.0 L/min
Dimensions (L x W x H)	185 x 272 x 284 mm (7-1/4 x 10-3/10 x 11-1/8")
Net Weight	1.3 - 2.0 kg (2.9 - 4.4 lbs)
Continuous Usage Time (approx.)	Low: 1,270 min Mid: 705 min High: 575 min with BL1860B

Fan Diameter	180 mm (7-1/8")
Air Flow	High: 4.6 L/min Med: 3.8 L/min Low: 3.0 L/min
Dimensions (L x W x H)	185 x 260 x 284 mm (7-1/4 x 10-1/4 x 11-1/8")
Net Weight	1.3 - 1.7 kg (2.8 - 3.8 lbs)
Continuous Usage Time (approx.)	Low - 315 min Med - 190 min High - 135 min with BL1021B

* All recommended selling price (RSP) shown are for reference only (exclude SST).



MP001G Cordless Inflator

MP001G	Light Truck	Car	Tractor	Bicycle	Road Bike	Ball	Beach ball/ Swim ring
Valve Shape							
Adapter							
Objects Conditions	Size: 205/ 70R16 0→600kPa High speed mode	Size: 215/ 60R16 0→250kPa High speed mode	Size: 7- 14 0→180kPa High speed mode	Size: 26 inch 0→300kPa Low speed mode	Size: 700 x 23C 0→700kPa High speed mode	Size: 700 x 23C 0→90kPa Ball mode	Size: 30 cm High speed mode
Work Speed (approx)	8 min 25 sec	2 min 45 sec	1 min 40 sec	9 sec	17 sec	39 sec	22 sec
Work Amount Battery BL4040	4 times	19 times	32 times	780 times	125 times	310 times	140 times

MP001GZ RM 929

Cordless Inflator

40Vmax



* Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



VIDEO CLIP
Models and specs
may vary by country
MP001G



Standard Equipment:
British Adapter, French Adapter,
Ball Adapter, Swim Ring Adapter

• GZ: Without Charger & Battery



Max Air Pressure 1,110 kPa (161 PSI) [11.1 bar]

Air Discharge Amount 200 kPa: 24 L/min | 700 kPa: 12 L/min

Hose Length 65 cm (25-1/2")

Dimensions (L x W x H)
320 x 108 x 231 mm
(12-5/8 x 4-1/4 x 9-1/8")

Net Weight 2.9 - 3.5 kg (6.4 - 7.7 lbs)

Work Amount (approx.)
19 times with BL4040
(16" Car Tires 215/ 60R16 at
High speed mode)

DMP181Z RM 957

Cordless Inflator

18V



Standard Equipment:
British Adapter, French Adapter,
Ball Adapter, Swim Ring Adapter

• Z: Without Charger & Battery



Max Air Pressure 1,110 kPa (161 PSI/ 11.1 bar)

Air Discharge Amount
200 kPa: 2.2 L/min
700 kPa: 1.1 L/min

Hose Length 65 cm (25-1/2")

Dimensions (L x W x H)
316 x 108 x 231 mm
(12-1/2 x 4-1/4 x 9-1/8")

Net Weight 2.5 - 2.8 kg (5.5 - 6.2 lbs)

Work Amount (approx.)
14 times with BL1860B
(16" Car Tires 215/ 60R16)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiseling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

Makita
mit

Comfort | Lifestyle

DMP180Z

RM 546

Cordless Inflator

18V



VIDEO CLIP

Models and specs may vary by country



DMP180



Standard Equipment:

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter

• Z: Without Charger & Battery



Max Air Pressure	830 kPa (121 PSI/ 8.3 bar)
Air Discharge Amount	200 kPa: 12 L/min 700 kPa: 8 L/min 830 kPa: 7 L/min
Hose Length	65 cm (25-1/2")
Dimensions (L x W x H)	246 x 80 x 174 mm (9-11/16 x 3-1/8 x 6-7/8")
Net Weight	1.4 - 1.7 kg (3.1 - 3.8 lbs)
Work Amount (approx.)	9 tires with BL1850B (16" Car Tires 215/ 60R16)

MP100DZ

RM 525

Cordless Inflator

12Vmax



VIDEO CLIP

Models and specs may vary by country



MP100D



Standard Equipment:

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter

• DZ: Without Charger & Battery



Max Air Pressure	830 kPa (121 PSI) [8.3 bar]
Air Discharge Amount	200 kPa: 10 L/min
Hose Length	65 cm (25-1/2")
Dimensions (L x W x H)	235 x 74 x 173 mm (9-1/4 x 2-15/16 x 6-13/16")
Net Weight	1.2 - 1.3 kg (2.6 - 3.0 lbs)
Work Amount (approx.)	2 tires with BL1016 16" Car Tires 215/60 R16

CW003GZ

RM 3,360

Cordless Cooler & Warmer Box

40Vmax

18V



*Recommended batteries (40Vmax)

2.0Ah, 2.5Ah, 4.0 Ah (F), 5.0 Ah, 8.0 Ah

WHILE STOCK LAST



Accessories (Optional)

AC Adapter

Part No. WL00000132

RM 453.50



Standard Equipment:

Shoulder Belt, Cigar Socket Cable

• Without Charger & Battery

Capacity	7 L (1.8 gal)
Cooling Capacity	-18 / -15 / -10 / -5 / 0 / 5 / 10 °C (0 / 5 / 15 / 25 / 30 / 40 / 50 °F)
Heating Capacity	30 / 35 / 40 / 45 / 50 / 55 / 60 °C (85 / 95 / 105 / 115 / 120 / 130 / 140 °F)
Cord Length	AC Adapter: 2 m (6.5 ft) *optional accessories Cigar Socket Cable: 2.5 m (8.2 ft)
Dimensions (L x W x H)	456 x 245 x 308 mm (18 x 9-5/8 x 12-1/8")
Net Weight	7.9 - 9.4 kg (17.4 - 20.7 lbs)
Continuous Usage Time (approx.)	5.5 hrs with BL4040 in cooling at -18°C 5.5 hrs with BL4040 in warming at 60°C



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Specialty Tools

AC001GZ

RM 3,296

Cordless Air Compressor

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



• GZ: Without Charger & Battery



No Load Speed (RPM)	Motor shaft: 6,000 Crank shaft: 2,075
Air Flow	34 L/min (1.2 SCFM) at 0.62 MPa (90 PSI)
Tank	7.6 L (2 gal)
Max Air Pressure In Tank	0.93 MPa (135 PSI)
Number Of Outlets	1
Recovery Time (from empty to full)	100 sec
Dimensions (L x W x H)	302 x 434 x 382 mm (11-7/8 x 17-1/8 x 15")
Net Weight	11.6 - 12.8 kg (25.6 - 28.2 lbs)
Actual Nail-driving Performance	717 pcs nail with BL4040

GP001G Cordless Grease Gun

Discharge speed selection [4 stages]



Flow rate [mL/min]			
Mode 1	Mode 2	Mode 3	Mode 4
145	220	290	350

Air lock detection function

Blinks when no grease is discharged after switch operation



Fixed-quantity discharge mode

Ensures precise greasing at multiple points



Stops automatically after the preset number of strokes. Quick, precise multi-point greasing with no need to check grease volume.



Lock button
Makes continuous greasing easier by locking the trigger

Twin LED job light



Variable speed trigger
Discharge volume can be adjusted by trigger pull



Flexible hose
For easy operation in tight spaces

Bulk grease is directly loadable into the barrel

GP001GZ

RM 2,625

Cordless Grease Gun

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Standard Equipment:
Shoulder Belt

• Z: Without Charger & Battery



Flow Rate	Mode 1: 145 mL/min (5.0 oz/min) Mode 2: 220 mL/min (7.5 oz/min) Mode 3: 290 mL/min (10.0 oz/min) Mode 4: 350 mL/min (12.0 oz/min)
Grease Capacity w/ Barrel A	Cartridge: 410 g (14.5 oz) Bulk: 455 g (16 oz)
Hose Length	120 cm (47-1/4")
Max Operating Pressure	69 MPa (10,000 PSI)
Dimensions (L x W x H)	395 x 112 x 245 mm (15-1/2 x 4-3/8 x 9-5/8")
Net Weight	5.2 - 6.5 kg (11.5 - 14.3 lbs)
Work Amount (approx.)	3,400 mL Dispensing Operating pressure 40 MPa at Mode 4 with BL4025

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita



Specialty Tools

DGP180RT | DGP180Z
RM 2,260 | RM 1,429

Cordless Grease Gun

18V



Standard Equipment:
Shoulder Strap
• RT: 1x Rapid Charger, 1x 5.0Ah Battery
• Z: Without Charger, Battery & Carrying Case



Flow Rate	Auto Speed Change Mode: 290 mL / min (10 oz / min) Slow Speed Mode: 145 mL / min (5 oz / min)
Grease Capacity w/ Barrel A	Cartridge: 410 g (14.5 oz) Bulk: 455 g (16 oz)
Grease Capacity w/ Barrel B	Cartridge: 450 g (15.9 oz) Bulk: 570 g (20.1 oz)
Hose Length	120 cm (47-1/4")
Max Operating Pressure	69 MPa (10,000 PSI)
Dimensions (L x W x H)	411 x 114 x 245 mm (16-1/4 x 4-1/2 x 9-5/8")
Net Weight	4.8 - 6.1 kg (10.6 - 13.4 lbs)
Work Amount (approx.)	2,356 mL Dispensing Operating pressure 60 MPa at low speed range with BL1860B

DVP181ZK
RM 4,495

Cordless Vacuum Pump

18V



Standard Equipment:
Vacuum Pump Oil, Adapter
• ZK: With Carrying Case, Without Charger & Battery



Flow Rate	113 L/min
Motor Speed	3,200 min ⁻¹
Oil Tank Capacity	300 mL
Inlet Port	5/16" 3/8"
Dimensions (L x W x H)	383 x 193 x 210 mm (15-1/8 x 7-5/8 x 8-1/4")
Net Weight	8.1 - 8.2 kg (17.9 - 18.1 lbs)
Continuous Usage Time (approx.)	60 min with BL1860B x2

DVP180Z
RM 2,415

Cordless Vacuum Pump

18V



Standard Equipment:
Vacuum Pump Oil, Adapter
• Z: Without Charger & Battery

Flow Rate	50 L / min
Ultimate Vacuum	20 Pa (150 microns)
Motor Speed	3,840 min ⁻¹
Oil Tank Capacity	115 mL
Inlet Port	5/16"
Dimensions (L x W x H)	265 x 93 x 175 mm (10-3/8 x 3-5/8 x 6-7/8")
Net Weight	3.5 kg
Continuous Usage Time (approx.)	50 min with BL1850B



* All recommended selling price (RSP) shown are for reference only (exclude SST).

DCG180RFEB | DCG180ZB

RM 2,385 | RM 1,345

Cordless Caulking Gun

18V



DCG180RFEB / ZB ▶



Standard Equipment:

RFEB/ ZB: 600mL Holder B,
Holder Joint B, Piston, Nozzle,
Rubber Ring, Rack 64

- RFEB: 1x Rapid Charger, 2x 3.0Ah Battery
- ZB : Without Charger, Battery & Carrying Case

*Not applicable
for Z & ZB model

Max Dispersing Force	5,000 N (1,100 lbs.)
No Load Speed	0 - 28 mm/sec (0 - 66 in/min)
Holder Size	300 mL 600 mL Optional Accessory 800 mL holder
Dimensions (L x W x H)	404 x 108 x 281 mm (15-7/8 x 4-1/4 x 11-1/8")
Net Weight	2.1 - 3.0 kg (4.7 - 6.6 lbs)
Work Amount (approx.)	500 pcs with BL1830B, 300 mL silicon sealant

CG100DZA

RM 1,246

Cordless Caulking Gun

12Vmax



Standard Equipment:

Holder, Holder Joint, Piston,
Rack 42

- DZA: Without Charger & Battery

*Not applicable


Max Dispersing Force	5,000 N (1,100 lbs)
No Load Speed	0 - 28 mm/sec (0 - 66 in/min)
Holder Size	300 mL *Optional Accessories 600 mL & 800 mL holder
Dimensions (L x W x H)	404 x 108 x 259 mm (15-7/8 x 4-1/4 x 10-1/4")
Net Weight	1.9 - 2.6 kg (4.2 - 5.8 lbs)
Work Amount (approx.)	150 pcs with BL1016 300 mL silicon sealant

HG001G

Cordless Heat Gun



Wide-slot nozzle

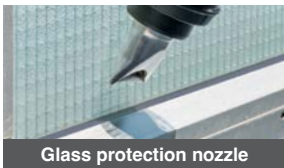

Glass protection nozzle



Reflector nozzle



Reduction nozzle 20mm

Temperature adjustment^{*2}

COOL mode (fan only) and heating range from 50°C to 600°C.



^{*2} Actual temperature at the nozzle tip may vary depending on the working environment and usage conditions.



Nozzle quick release

The quick-release mechanism allows tool-free nozzle removal without touching hot metal parts.



LCD display



Maximum
Temperature
600°C



Can be placed
vertically

HG001GZ02

RM 1,406

Cordless Heat Gun

40Vmax



^{*1}Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah, 8.0Ah



Standard Equipment:

Reduction Nozzle, Glass Protection Nozzle,
Reflector Nozzle, Wide Slot Nozzle

- GZ02: 1x Makpac Connector Box Type 3,
Without Charger & Battery

Air Temperature (°C)	Ambient temperature (blowing) up to 600 °C (1,112.0 °F)
Air Flow	Stage 1: 120 L/min Stage 2: 150 L/min Stage 3: 180 L/min Stage 4: 200 L/min
Dimensions (L x W x H)	191 x 86 x 272 mm (7-1/2 x 3-3/8 x 10-3/4")
Net Weight	1.5 - 2.7 kg (3.3 - 6.0 lbs)
Continuous Usage Time (approx.)	14 min with BL4040 600°C at full speed

Speciality Tools

DHG181ZK

RM 935

Cordless Heat Gun

18V

VIDEO CLIP

Models and specs may vary by country

DHG180
DHG181

Standard Equipment:
Glass Protection Nozzle, Wide Slot Nozzle,
Reflector Nozzle, Reduction Nozzle 20

• ZK: With Carrying Case,
Without Charger & Battery

Air Temperature (°C)	Dial 1: Ambient temperature Dial 2: 150 °C Dial 3: 250 °C Dial 4: 350 °C Dial 5: 450 °C Dial 6: 550 °C
Air Flow	Stage 1: 120 L/min Stage 2: 200 L/min
Dimensions (L x W x H)	173 x 79 x 255 mm (6-3/16 x 3-1/8 x 10")
Net Weight	1.0 - 1.4 kg (2.2 - 3.1 lbs)
Continuous Usage Time (approx.)	Stage 1: 30 min Stage 2: 21 min with BL1860B

DHG180ZK

RM 831

Cordless Heat Gun

18V

VIDEO CLIP

Models and specs may vary by country

DHG180
DHG181

Standard Equipment:
Glass Protection Nozzle, Wide Slot Nozzle,
Reflector Nozzle, Reduction Nozzle

• ZK: With Carrying Case,
Without Charger & Battery

Air Temperature (°C)	550 °C
Air Flow	200 L/min
Dimensions (L x W x H)	168 x 79 x 251 mm (6-5/8 x 3-1/8 x 9-7/8")
Net Weight	1.0 - 1.3 kg (2.2 - 2.9 lbs)
Continuous Usage Time (approx.)	21 min with BL1860B

HG5030 | HG5030K

RM 379 | RM 410

Heat Gun

• 2 temperature settings
(350 and 500 °C).

Continuous Rating Input

1,600 W

Air Temperature
(°C)/ Flow (L/min)

Switch 1: 350 / 300
Switch 2: 500 / 500

Dimensions (L x W x H)

233 x 80 x 208 mm
(9-1/8 x 3-1/8 x 8-3/16")

Net Weight

0.56 kg (1.2 lbs)

Power Supply Cord

2.0 m (6.6 ft)

Standard Equipment:
Glass Protection Nozzle, Reflector Nozzle,
Reduction Nozzle, Wide Slot Nozzle, Scraper

*Only for
HG5030K

HG5030K

WHILE
STOCK
LAST



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Accessory



Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory



ADP001G (TWAADP001G)
RM 373.70

Adapter for USB

40Vmax



*Recommended batteries 2.0Ah, 2.5Ah,
4.0 Ah (F), 5.0 Ah, 8.0 Ah



• Without Charger & Battery

USB Port	2 (Type A)
Dimensions (L x W x H)	119 x 79 x 88 mm (4-11/16 x 3-1/8 x 3-1/2")
Net Weight	0.8 - 1.4 kg (1.8 - 3.1 lbs)
Work Amount (approx.)	7 times with BL4050F Charging iPhone XR

ADP05 (AUBADP05)
RM 219.90

Adapter for USB

18V



• Without Charger & Battery

USB Port	2 (Type A)
Dimensions (L x W x H)	102 x 72 x 43 mm (4 x 2-13/16 x 1-11/16")
Net Weight	0.46 - 0.71 kg (1.0 - 1.6 lbs)
Work Amount (approx.)	10 times with BL1850B Charging Iphone 6S (1715 mA·h)



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Accessory

Drill chuck assembly for impact driver

Still photo	Name	Related models	Type	Part No.	RSP (RM)
	Drill chuck S10 & key set	TD0100, TD0101F	48-NZ	191880-6	110.40
	Keyless drill chuck set	DTP141, TD0100, TD0101F	48-NZ	192121-3	190.00

Ratchet head adapter

Still photo	Name	Related models	Type	Part No.	RSP (RM)
	Socket adapter 9.5 set	DWR180, WR100D	Hex. 13mm - SQ-Drive	191A50-3	117.30
	Socket adapter 6.35 set			191A51-1	116.20
	Ratchet attachment set	DTL061, DTL063, TL064D, TL065D	Hex. 21mm	192439-2	1,003.10

Autofeed attachment set



Name	Related models	Part No.	RSP (RM)
Autofeed attachment set	DFS250, DFS452	191L23-2	491.30
		191L24-0	547.50
	DFS250, DFS452	191L25-8	554.60

Casing for auto feed screwdriver



Name	Related models	Part No.	RSP (RM)
Casing 55 set	DFR550	191B45-2	620.00

Bit for autofeed attachment set

*Use with Autofeed attachment set



Name	Related models	Part No.	RSP (RM)
Phillips bit 2-130 set	DFS452	199155-7	255.50

Shear wrench sleeve

For Model 6922NB DWT310, WT001G
*Type F (for HEXA TECH (GFD France))
** for Chinese market



Bolt Size	Outer sleeve				Inner sleeve		
	Hex size	L (mm)	Part No.	RSP (RM)	L (mm)	Part No.	RSP (RM)
M16	27	35	764362-7	123.20	36	764416-0	325.60
M20	32	37	764361-9	120.80	38	*764421-7	TBA
			**196276-6	TBA		764417-8	307.90
M22, 7/8"	36 1-7/16"	39	153909-6	168.80	39	764418-6	425.90
		85	764364-3	321.60	85	*764423-3	TBA
						764352-0	587.50

For Model 6924N

Bolt Size	Outer sleeve				Inner sleeve		
	Hex size	L (mm)	Part No.	RSP (RM)	L (mm)	Part No.	RSP (RM)
M22	36	49	194033-6	321.90	48	194310-6	544.70
M24	41		194034-4	288.40	49	194311-4	542.20
7/8"	1-7/16"		194092-0	TBA	48	194310-6	544.70
1"	1-5/8"		194034-4	288.40	49	194312-2	TBA

SDS-MAX Drill bit remover set

Still photo	Name	Related models	Connection type	Connection size mm (inch)	Part No.	RSP (RM)
	Drill bit remover set	6905H, DTW450, TW0350	Square drive	12.7 (1/2)	195870-1	561.70

Extension handle

Still photo	Name	Related models	Part No.	RSP (RM)
	Extension handle set	DTW1001, DTW1002, DTW700, DTW701, DTW800, TW001G, TW002G, TW007G, TW008G	191G67-2	773.10

Side grip for drill and angle drill

Still photo	Name	Related models	Part No.	RSP (RM)
	Grip 36 complete	DS4012, DS5000	152492-0	19.50
	Side handle set	DP4021	1914C4-9	25.50
	Handle set	DDG461, DG002G	191P11-3	680.00

Drill chuck assembly

Still photo	Name	Related models	Connection type	Part No.	RSP (RM)
	Keyless drill chuck assembly	HR2230, HR2300, HR2600	SDS-PLUS	122823-7	234.60
	Drill chuck set	HR2230, HR2475, HR2631F, HR2652, HR2670, HR2810	SDS-PLUS	194041-7	59.00

Quick change drill chuck set

Still photo	Name	Type	Related models	Part No.	RSP (RM)
	Tool holder set	SDS-PULS tool holder	HR002G	199138-7	90.20
	Drill chuck set	Keyless drill chuck	HR002G	199139-5	235.00
			HR2320T, HR2631FT	194079-2	381.00

Dust extraction system set

For cleaner work environment.



Name	Related models	Part No.	RSP (RM)
DX01	DHR242	195896-3	630.60
DX05	DHR182	199658-1	463.10
DX08	DHR280, DHR282	199579-7	755.50
DX10	HR008G, HR3011FC	191F95-1	718.20
DX12	HR001G, HR003G	191E52-3	860.00
DX15	HR007G	191X39-9	889.10
DX16	HR010G, DHR183	1911P2-6	416.40
DX06	DHR242	199561-6	671.70

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Dust case for dust extraction system

For cleaner work environment.



Description	Part No	RSP (RM)
DX01	196163-9	136.40
DX05	199595-9	186.30
DX10	127214-7	223.90
DX06, DX08, DX12	199555-1	TBA
DX15	199586-0	161.20
DX16	1911P5-0	175.50

Filter for dust extraction system

For cleaner work environment.

Shape	Description	Part No	RSP (RM)
	DX01, DX06, DX08, DX10, DX12, DX15	199557-7	57.30
	DX05, DX16	199596-7	45.10


Sealing cap for dust extraction system

Shape	Description	Part No	RSP (RM)
	DX01, DX06, DX05, DX08, DX10, DX12	424474-5	2.40
	DX01, DX06, DX05, DX15	422784-4	2.30
	DX16	422992-7	2.40

Side grip, handle for hammer drills

Still photo	Name	Related models	Part No.	RSP (RM)
	Grip assembly set	DDF484, DF002G, DHP484, HP002G	191E41-8	123.50
	Grip base set	HR1841F	194581-5	67.00
	Side handle 73 set	HR005G, HR4003C, HR4013C	196792-8	99.60

Sanding pad for twist-on/ twist-off system



Models	Rubber Pad for Twist-on/ Twist-off System										
	1. Adapter for Rubber Pad					2. Rubber Pad					
	Thread Size	Thread Size	Wrench Size	Parts No	RSP (RM)	Pad Type	Thread Size	Pad Size (mm)	Max RPM	Part No	RSP (RM)
DPV300 PV301D	5/8"-24 UNF	1/4"-20 UNC	13	743126-2	23.50	For Twist-on/ twist-off system	1/4"-20 UNC	50	16,000	743124-6	67.90

Hammer carrier



Name	Related models	Part No.	RSP (RM)
Hammer carrier	HM004G	JM00000674	876.80

Hammer bit grease and machine grease

Still photo	Name	Note	Related models	Part No.	RSP (RM)
	Grease vessel set	Hammer bit grease 100ml	All Rotary Hammer, Demolition Hammer and Electric Breaker	194683-7	39.90
	Grease set	80ml	DHR171, HR140D, HR166D, HR3200C, HR3210C, HR3210FCT, HR3540C, HR3541FC, HR4002, HR4501C, HR4510C, HR4511C	1914C6-5	23.70
		-	HM0810, HM0810T, HM1201	1914C5-7	24.00
	Oil vessel set	100ml	HM1306	1914A4-5	24.40
		Machine grease 26g	HR001G, HR007G, HR010G, HR140D, HR166D, HR2320T, HR2631FT, HR2652	195127-0	12.30

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

makita

makita

Accessory

Inner flange & lock nut

(For depressed center wheel, diamond wheel and Cutting wheel)
* Do not use Ezynut with Makita Super Flange or Makita angle grinder with "F" on the end of the model No. Those flanges are so thick that the entire threaded cannot be retained by the spindle.
Applicable models:Makita 180mm/230mm angle grinders, and following models equipped with M14 spindle

Wheel size	Brake	Models	Spindle thread	for Depressed center wheel (Type:27, 28, 29, 42)				for Abrasive cut-off wheel (Type:41)				for Diamond cut-off wheel				Lock nut			Ezynut (Toolless Lock nut)			
				Size	Arbor size (mm)	Inner flange		Size	Arbor size (mm)	Inner flange		Size	Arbor size (mm)	Inner flange		Size	Part No.	RSP (RM)				
						Part No.	RSP (RM)			Part No.	RSP (RM)			Part No.	RSP (RM)				Part No.	RSP (RM)		
100 mm	Without Brake System	-	M10x1.5	29	16	224491-3	5.00	29	16	224491-3	5.00	29	16/20	224491-3	5.00	10-29	224610-1	3.60	-	-		
			M10x1.25	30	16	224270-9	15.00	30	16	224270-9	15.00	30	16/20	224270-9	15.00	10-30	224578-1	17.30	-	-		
			M10x1.25	35	16 (5/8")	224377-1	7.00	35	16 (5/8")	224377-1	7.00	35	16 (5/8")	224377-1	7.00	10-35	194608-1	TBA	-	-		
			M10x1.5	29	16	224491-3	5.00	29	16	224491-3	5.00	29	16/20	224491-3	5.00	10-29	224610-1	3.60	-	-		
	With Brake System	M10x1.5	30	16	224483-2	4.60	30	16	224483-2	4.60	30	16/20	224483-2	4.60	10-29	224610-1	3.60	-	-			
115 mm / 125 mm	Without Brake System	-	M14x2 (DIN)	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	14-45	224485-8	11.20	*195354-9	333.70		
																	224554-5	14.40				
												42					224485-8	11.20				
	With Brake System		M14x2 (DIN)	42B	22.23 (7/8")	224447-6	13.60	42B	22.23 (7/8")	224447-6	13.60	42B	22.23 (7/8")	224447-6	13.60	14-45	224485-8	11.20			*195354-9	333.70
		224554-5	14.40																			
150 mm	Without Brake System	-	M14x2 (DIN)	42	22.23 (7/8")	224490-5	5.40	42	22.23 (7/8")	224490-5	5.40	42	22.23 (7/8")	224490-5	5.40	14-45	224485-8	11.20	*195354-9	333.70		
																	224554-5	14.40				
			M14x2 (DIN)	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	14-45	224485-8	11.20			*195354-9	333.70
																	224554-5	14.40				
180 mm / 230 mm	Without Brake System	-	M14x2 (DIN)	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	14-45-8.5	224485-8	11.20	*195354-9	333.70		
																14-45-8.5	224554-5	14.40				
																14-45-11	224543-0	12.80				
			M14x2 (DIN)	45	22.23 (7/8")	224490-5	5.40	-	-	-	-	45	22.23 (7/8")	224490-5	5.40	14-45-8.5	224485-8	11.20	-	-		
																14-45-8.5	224554-5	14.40				
																14-45-11	224543-0	12.80				
			M14x2 (DIN)	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	45	22.23 (7/8")	224490-5	5.40	14-45-8.5	224485-8	11.20	*195354-9	333.70		
																14-45-8.5	224554-5	14.40				
																14-45-11	224543-0	12.80				
	With Brake System	GA7070, GA7071, GA9070, GA9071		M14x2 (DIN)	42B	22.23 (7/8")	224447-6	13.60	42B	22.23 (7/8")	224447-6	13.60	42B	22.23 (7/8")	224447-6	13.60	14-45-8.5	224485-8	11.20	*195354-9	333.70	
					224554-5	14.40																
				M14x2 (DIN)	42B	22.23 (7/8")	224447-6	13.60	-	-	-	-	42B	22.23 (7/8")	224447-6	13.60	14-45-8.5	224485-8	11.20	*195354-9	333.70	
																		224554-5	14.40			

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Hook & loop pad for polisher, sander

Still photo	Name	Related models	Outer diameter mm (inch)	Part No.	RSP (RM)
	Triangle plate complete set	DBO481	-	191Y22-2	44.60
	Rectangle plate complete set		-	191Y23-0	39.90
	Pad complete set		-	191Y24-8	32.20
	Pad 125 set	DPO500, DPO600, PO5000C, PO6000C	125	197923-2	511.30
	Pad 150 set		150	197929-0	388.40
	Pad 123 set	DBO180, BO5030, BO5031, BO5040, BO5041	123	743081-8	72.80
	Pad 130 set	BO6050	130	197317-1	269.10
	Pad 150 set	BO6050	150	197315-5	320.40
	Pad 150 set	BO6050	150	197314-7	189.60
	Pad 150 set	BO6050	150	197316-3	313.50
	Pad 220 set	DSL801	220 (8-5/8)	199938-5	380.00
	Pad 210 set	DSL801	210 (8-1/4)	199939-3	349.90
				199940-8	397.70

Pad complete for sander

Still photo	Name	Related models	Part No.	RSP (RM)
	Square pad set	BO005CG, BO006CG	1914H9-4	72.80
	Triangle pad set		1914J0-6	99.70
	Pad 125 set	BO001CG, BO003CG	1914J2-2	93.90
	Pad complete set	DBO481	191Y25-6	20.60
	Pad complete set	BO3710, DBO380	194929-1	45.00
			194930-6	95.90
	Pad complete set	BO4901	193523-6	84.40
			193521-0	145.90
	Pad complete set	BO4556	158324-9	TBA


Felt pad for polisher, sander

Still photo	Name	Related models	Outer diameter mm (inch)	Part No.	RSP (RM)
	Felt pad 150 set	BO6050, DPO500, DPO600	150 (5-7/8)	193288-0	103.10
	Felt pad set	BO5031, BO5041, DBO180, DPO500, DPO600, PO5000C, PO6000C	125 (4-7/8)	196152-4	103.00

Sponge pad for polisher, sander

Still photo	Name	Related models	Outer diameter mm (inch)	Part No.	RSP (RM)
	Sponge pad 80 set	DPV300, PV301D	80 (3-1/8)	191N90-9	59.00
				191N91-7	73.30
	Sponge pad 125 set	DBO180, DPO500, DPO600, BO5031, BO5041, PO5000C, PO6000C	125 (5)	794558-6	93.30
	Sponge pad 190 set	PV7001C	190 (7-1/2)	193470-1	171.30

Hook & loop pad



Models	Pad Type	Thread size	Pad Size (mm)	Max RPM	Parts No	RSP (RM)
DPV300 PV301D	Hook & loop	5/8"-24 UNF	75	16,000	743125-4	217.30

Wool pad

Still photo	Name	Related models	Outer diameter mm (inch)	Part No.	RSP (RM)
	Wool pad 80 set	DPV300, PV301D	80 (3-1/8)	191N92-5	72.80
	Wool pad 140 set	BO5031, BO5041	140	794560-9	89.10
	Wool pad 150 set	BO6030, BO6050, DPO500, DPO600, PO5000C, PO6000C	150 (6)	199424-6	147.50
	Wool pad 180 set	PV001G	180 (7-1/8)	191D53-5	136.20
		9237C, PV001G, PV7000C		192629-7	136.40

Sleeve 18

For centering pads.



Model No	Part No	RSP (RM)
PV001G, 9237C/ CB, 9227C/ B, PV7001C, PV7000C	262542-4	5.30

Wool bonnet



Model No	Size (mm)	Part No	RSP (RM)
PV001G, PV7000C, PV7001C, 9227C/CB, 9237C/CB	180	794176-0	147.70

Wheel guard

Still photo	Name	Related models	Part No.	RSP (RM)
	Cutting wheel cover attachment 125 set	9558HN, DGA505, DGA508, DGA511, DGA514, DGA518, DGA519, GA005G, GA013G, GA023G, GA029G, GA044G, GA5010, GA5020, GA5030, GA5040, GA5041C, GA5091, GA5092	199710-5	58.00

Accessory

Grip, loop handle for angle grinder

Still photo	Name	Related models	Thread size	Part No.	RSP (RM)
	Grip 35 set	All 100mm-150mm Angle Grinder	M8	1910X5-0	TBA
				1910X6-8	TBA
	Grip 36 set (Rubberized)			158237-4	21.90

Collet cone, collet nut for die grinder

Still photo	Name	Related models	Part No.	RSP (RM)
	Collet cone 6 set	GD0800C, GD0801C, GD0810C, GD0811C	193012-1	102.40
	Collet cone 3 set		193011-3	157.00

Head cover



Model No	Part No	RSP (RM)
9564CVL, 9565CVL, 9565CLR, PW5000C, PW5001C, PK5001C	417322-5	42.60
9237C/ CB	455291-2	20.80
SA4540, SA4542C, SA5040C	453378-4	34.00

Collet one, collet nut and wrench size



Model No	Size	Collet Cone		Collet Nut		Wrench Size
		Part No	RSP (RM)	Part No	RSP (RM)	
GD0600 GD0601	3 mm	763627-4	65.00	763664-8	8.00	13 mm x2
	6 mm	763620-8	41.30			
	1/4"	763625-8	45.50			
GD0603	3 mm	763627-4	65.00	763236-9	9.70	10 mm x 2
	6 mm	763620-8	41.30			
	1/4"	763625-8	45.50			
DGD800 DGD801	6 mm	763670-3	57.00	763668-0	9.20	13 mm x2
	8 mm	763671-1	TBA			
GD0800C GD0801C GD0811C	6 mm	763646-0	44.30	763645-2	18.60	13 mm 19 mm
	1/4"	763650-9	169.10			

Punch plate for sander

Still photo	Name	Related models	Description	Part No.	RSP (RM)
	Punch plate set	BO3710, DBO380	Plastic	194947-9	TBA

Side handle set for die grinder

For increased maneuverability.



Model No	Part No	RSP (RM)
DGD800, DGD801, GD0600, GD0601, GD0800, GD0800C, GD0801C, GD0811C	192985-5	53.70

Vise holder set for die grinder

For clamping down die grinder for stationary applications.



Model No	Part No	RSP (RM)
GD0800, GD0800C, GD0801C, GD0810C, GD0811C	193141-0	318.60

Water supply set for cutter

Still photo	Model No	Description	Part No	RSP (RM)
	DCC500, DCC501	Water supply cover set A	191X01-4	266.80

Dust box assembly, paper dust bag, filter for sander

Still photo	Name	Related models	Part No.	RSP (RM)
	Paper dust bag set	BO4556, DBO180, DBO481	194746-9	31.30
	Filter set	BO3710, BO4556, BO5031, BO5041, DBO180, DBO380, DBO481	195133-5	57.30
			195134-3	69.90

Dust cover, protector for polisher, sander

Still photo	Name	Related models	Part No.	RSP (RM)
	Dust cover set	PW5000C, PW5001C	194233-8	90.40

Stand for belt sander

Still photo	Name	Related models	Part No.	RSP (RM)
	Belt sander stand set	9404	193055-3	538.80

Guide rule for sander

Still photo	Name	Related models	Part No.	RSP (RM)
	Guide rule set	BS001G	1915E3-1	37.10

Sanding shoe

Still photo	Name	Related models	Part No.	RSP (RM)
	Sanding shoe set	BS001G	193070-7	446.80

Clamp complete for belt sander

Still photo	Name	Related models	Part No.	RSP (RM)
	Clamp complete set	9911, BS001G	192694-6	259.90

Portable band saw stand

Still photo	Name	Related models	Part No.	RSP (RM)
	Stand of chain vise set	2107F	194026-3	3,622.00

Cart set

Still photo	Related models	Part No.	RSP (RM)
	CE001G	1915C1-1	TBA

Shear

Still photo	Name	Related models	Description	Part No.	RSP (RM)
	Shear blade set	JS3201	-	792287-5	211.50

Threaded rod cutter blade

Still photo	Name	Related models	Thread type	Thread size	Part No.	RSP (RM)
	Cutter blade M10 set	SC103D	ISO metric	M10	199083-6	TBA
					199082-8	TBA
	Cutter blade M8 set			M8	199085-2	TBA
					199084-4	TBA
	Cutter blade M6 set			M6	199087-8	TBA
					199086-0	TBA
	Cutter blade W3/8 set	DSC121	ISO inch/BSW	3/8"-16 UNC/W3/8	199081-0	296.00
					199080-2	458.60
	Cutter blade W3/8 set	DSC121	BSW	W3/8	SC09002730	660.70

Cutter blade set (2pcs set) for steel rod cutter

Still photo	Name	Related models	Part No.	RSP (RM)
	Cutter blade set	DSC163	SC09002470	968.70
		DSC191	SC09002030	TBA

Cutter blade for CP100D

Still photo	Name	Related models	Part No.	RSP (RM)
	Multi cutter blade set	CP100D	198604-1	41.90

Combination of punch and die for PP001G, DPP200

- Punching holes through a thin structural metal plate may cause deformation of the plate and burr on the holes.
- If you need precision punching, see the tables below to select an optimum combination of punch and die.



Workpiece thickness (mm)			Punch			Die		
Mild Steel	Stainless Steel (Inox)	Channel	Hole size (mm)	Part No	RSP (RM)	Hole size	Part No	RSP (RM)
3-9	3-6	7.5	13	SC05340110	TBA	SB13	SC00000217	452.60

Hydraulic oil

Still photo	Model No.	Viscosity	Size (mL)	Part No.	RSP (RM)
	DPP200, DSC121, DSC163, DCS191	ISO46	35	SC00000106	25.40

Crown molding stopper set

Still photo	Name	Related models	Part No.	RSP (RM)
	Crown molding stopper set	DLS111, DLS211, LS003G, LS004G, LS1019L, LS1219L	192628-9	335.90

Sub base set

Still photo	Name	Related models	Part No.	RSP (RM)
	Sub base assembly set	DLS111, DLS211, LS1019L, LS1219L	191C01-8	145.80

Triangular rule for blade adjustment

Still photo	Related models	Part No.	RSP (RM)
	DLS110, DLS111, DLS112, DLS211, DLS212, DLS600, DLS713, DLS714, LF1000, LH1040, LH1040F, LS002G, LS003G, LS004G, LS0714, LS0714F, LS0714FL, LS0714L, LS1019, LS1019L, LS1030N, LS1040, LS1040F, LS1045, LS1219, LS1219L, LS1221	762001-3	7.10

Rip fence

Still photo	Name	Related models	Part No.	RSP (RM)
	Guide rule set	4327, 4329, JV0600, JV101D, JV103D	192732-4	34.40
		4350CT, DJV180, DJV181, DJV182, JV002G	193516-3	56.20

Cover plate



Model No	Part No	RSP (RM)
4326, 4327, 4329, 4350CT, 4350FCT, 4350T, 4351CT, 4351FCT, 4351T, DJV180, DJV181, DJV182, JV0600, JV100D, JV101D, JV143D, JV183D	417852-6	9.00
DJV184, DJV185, JV102D, JV103D	457867-1	8.20
JV001G, JV002G	413J99-0	TBA

Anti-splintering device for jig saw

Still photo	Name	Related models	Part No.	RSP (RM)
	Kerf board set	4327, 4329, 4350CT, DJV180, DJV181, DJV182, DJV184, DJV185, JV001G, JV002G, JV0600, JV101D, JV102D, JV103D	192557-6	132.20

Dust cover

For cleaner work environment.

Model No	Part No.	RSP (RM)
4300BV	194903-9	18.20

Accessory

Dust bag for sawing

Still photo	Name	Related models	Part No.	RSP (RM)
	Dust bag assembly	DLS111, DLS211, DLS713, DLS714, LF1000, LS003G, LS004G, LS0714, LS1019L, LS1030N, LS1040, LS1219L	122852-0	27.70

Stand set WST03



Model No	Part No	RSP (RM)
MLT100	JM27000300	1,418.20

Stand set WST04



Model No	Part No	RSP (RM)
2704	194093-8	2,178.60

Stand set WST06 & WST07




Model No	Part No	RSP (RM)
All slide compound saw, miter saw and table top miter saw	DEBWST06	1,459.00
Bracket set for WST06	JM00000219	324.70
All slide compound saw, miter saw and table top miter saw	DEBWST07	TBA

Guide rail



Overall Length	Part No	RSP (RM)
1.4 m	194368-5	363.70
1.9 m	194925-9	574.20
3.0 m	194367-7	818.20

Repair parts for guide rail

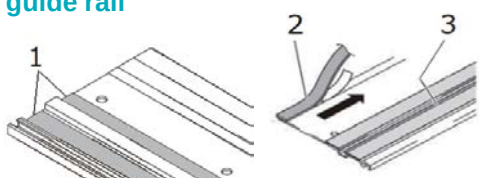

Item	Part No	RSP (RM)
1. Seat 10m set (For upper plastic tape repair)	194416-0	267.50
2. Position Seat 1.4 m	194418-6	27.80
3. Rubber Seat 10m set (For lower rubber tape repair)	194417-8	249.00

Clamp set

Use with guide rail.



Shape	Type	Part No	RSP (RM)
	A: Standard	194385-5	272.80
	B: Quick	199826-6	536.40
	C: Push clamp	1913K5-7	213.50

Bevel guide set

Adjustable angle of guide rail.

Part No	RSP (RM)
196664-7	221.90



Guide rail joint connector 2 pcs set

Part No	RSP (RM)
198885-7	153.30



Parallel guide set

Guide rail parallelly to any position from the end face of workpiece. Stable size cutting can be done by setting.



Part No	RSP (RM)
1913K7-3	709.00



Limit stop set

Can reduce the risk of kickback by using with guide rail.




Model No	Part No	RSP (RM)
CA5000, DHS782, DHS783, DHS900, DSP600, DSP601, HS004G, HS009G, HS011G, SP001G, SP6000	1913J9-2	28.60

Guide rail adaptor

Item	Circular Saw								Jig Saw			Router Trimmer
	A	B	C	D	E	F (N)	G	H	I (F)	J	K	L
Model	HS7100 HS7101	DHS630 HS6100 HS6101	HS7601 HS7610 HS7611	DHS680 HS012G	HS6600	DHS630 HS6100 HS6101 HS7100 HS7101	HS0600	DHS661	DJV180 DJV181 DJV182 JV001G JV002G 4350CT	DJV184 DJV185 JV102D JV103D	3612BR RP0900 RP1801 RP1803F RP2301FC RP2303FC	**RT001G **DRT50 **RT0700C **RT0702C
Part No.	195837-9	195838-7	197005-0	196953-0	197462-2	197252-3	198570-2	199232-5	197252-3	193517-1	198704-7	194579-2
RSP (RM)	200.40	490.80	161.90	443.50	131.30	418.70	1,327.30	319.10	TBA	145.30	157.50	221.00

**Use with Plunge base assembly (Part No. 195563-0)

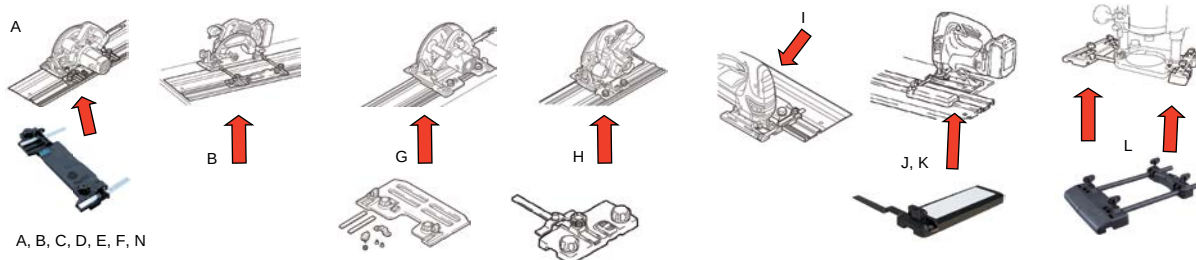

Set plate

Still photo	Name	Related models	Part No.	RSP (RM)
	Set plate set	DKP180, DKP181, KP001G, KP0800	193540-6	55.70

Edge fence, guide rule

Still photo	Name	Related models	Part No.	RSP (RM)
	Guide rule set	1805N	191454-3	101.30

Straight guide assembly for trimmer, router

Still photo	Name	Related models	Type	Part No.	RSP (RM)
	Straight guide set	DRT50, RP0900, RP2301FC, RT001G, RT0700C	Micro adjustment	193312-9	440.80
		RP1803, RP2301FC, RP2303FC		194935-6	293.50
		DRT50, RP0900, RP1803, RP2301FC, RP2303FC, RT001G, RT0700C		195136-9	318.60

Trimmer guide holder

Still photo	Name	Related models	Part No.	RSP (RM)
	Guide holder set	DRT50, RT001G, RT0700C	195564-8	39.90

Drywall guide bit

Still photo	Name	Related models	Overall diameter mm (inch)	Shank diameter mm (inch)	Range	Bearing	Part No.	RSP (RM)
	Drywall guide bit 3.18 set	DCO180, DCO181	3.18 (1/8)	3.18 (1/8)	★★★☆☆	N	191G69-8	21.70

Router base assembly

Still photo	Name	Related models	Part No.	RSP (RM)
	Plunge base set	DRT50, RT001G, RT0700C	195563-0	289.00
			196094-2	324.30

Trimmer base assembly

Still photo	Name	Related models	Type	Part No.	RSP (RM)
	Trimmer base assembly set	3709, 3710, 3711, 3712	Transparent base Fine depth adjustment	194267-1	50.40
			For chamfering Fine depth adjustment	194269-7	211.90
	Trimmer base set	DRT50, RT001G, RT0700C	-	196612-6	152.60
	Tilt base set		-	198987-9	127.50

Offset base assembly

Still photo	Name	Related models	Part No.	RSP (RM)
	Offset base set	DRT50, RT001G, RT0700C	196922-1	367.60

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

TAKITA

Accessory

Collet cone & collet nut

*With Poly bag & header



Model No	Wrench Size	Collet Cone			Collet Nut	
		Size	Part No	RSP (RM)	Part No	RSP (RM)
DCO180 DCO181	17mm	1/8"	763677-9	58.60	763258-9	19.20

Collet corn / Collet nut

Trimmer, Sash routerand Router



Model No	Wrench Size	Collet Cone			Collet Nut	
		Size	Part No	RSP (RM)	Part No	RSP (RM)
DRT52, 3709	10mm 17mm	6 mm	763607-0	13.50	763606-2	16.40
					763661-4	6.80
		1/4"	763608-8	13.30	763661-4	6.80
			763663-0	25.50		
DRT50, RT001G, RT0700C, RP0900	13mm 22mm	8mm	763618-5	12.60	763615-1	14.40
		1/4"	763637-1	43.70		
		3/8"	763619-3	6.20		
RP001G, 3600H	13mm 24mm	12mm	763628-2	74.60	763629-0	34.40
		1/2"	763622-4	72.60		
RP1803, RP2301FC, RP2303FC	24mm	12mm	763628-2	74.60	763674-5	29.70
		1/2"	763622-4	72.60		

Collet sleeve



Model No	Collet size	Bit size	Part No	RSP (RM)
RP1803, RP2301FC, RP2303FC, 3600H, RP001G	1/2"	1/4"	763803-0	23.50
		3/8"	763805-6	23.50
	12mm	6mm	763801-4	25.00
		10mm	763807-2	27.30

Templet guide (Metric size)

*for fast production of complicated shapes by using templet
**DRT50, RT001G, RT0700C: Use with Plunge base assembly


Model No	Still photo	A (mm)	B (mm)	C (mm)	Part No	RSP (RM)
DRT50, DRT52, 3709, 3710, 3711, 3712, N3701, RT001G, RT0700C, RT0702C		8	10	9.5	*343577-5	5.70
DRT50**, RP001G, RP0900, RP1803, RP2301FC, RP2303FC, RT001G**, RT0700C**		7.7	9.5	11.5	164379-4	82.20
		14	17	20	165366-6	62.20

Templet guide (Metric size)

Model No	Still photo	A (mm)	B (mm)	C (mm)	Part No	RSP (RM)
3600H		14	16	8	323018-7	29.40

Templet guide adapter 30

(For B & D, Porter-Cable two-piece templet guide)
Nut M30
Part No. 252627-4
Templet guide adapter 30
Type A or Type B




Templet guide 25
Part No. 321812-1
Plunge base assembly (P/N: 195563-0 (EU:196094-2)) is also necessary.

Model No	Type	Part No	RSP (RM)
DRT50**, RP0900, RP1803, RP2301FC, RP2303FC, RT001G**, RT0700C**, 3600H	A	321492-3	114.80
	B	321493-1	76.80

Rivet gun maintenance kit

* short madrel

**Model DRV150: Pipe is not necessary for operation.

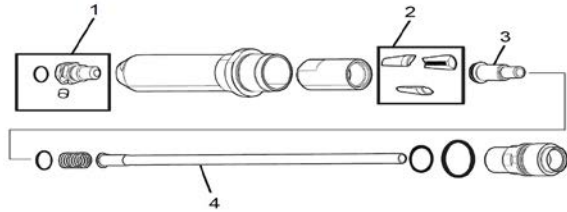

Model No.	Rivet size (mm)	1		Hade / Jaw case				2		3		4		1+3+4		1+3					
		Nose piece size		(-DEC. 2023)		(JUN. 2023 -)		Color / Jaw size		Color / Jaw pusher size		Color / pipe size		Nose piece, Jaw pusher and pipe set		Nose piece and jaw pusher set					
		Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)				
DRV150, DRV250	2.4	2.4		Marking on 6.4	Marking on 4.8S	Black / 4.8			Gray / 1.9		Silver / 2.3		199729-4	TBA	-	-					
		127230-9	TBA						127478-3	TBA	162747-5	TBA									
	*2.4	2.4 S							122D82-7	TBA	Gray / 1.9		Silver / 2.3				1911U6-3	TBA			
		127478-3	TBA								162747-5	TBA									
	3.2	3.2							127229-4	94.20	Black /2.5		Black / 2.8				199728-6	226.80			
		127477-5	23.10								162746-7	84.60									
	*3.2	3.2 S		327279-1	195.40	327691-5	TBA	199731-7	69.60	Black /2.5		Black / 2.8		1911U4-7	172.40						
		122D81-9	TBA							127477-5	23.10	162746-7	84.60								
	4.0	4.0								127228-6	TBA	Gray / 3.1		Silver / 3.5		191F80-4	345.00	191C04-2	TBA		
		127476-7	TBA									**162745-9	TBA								
	*4.0	4.0 S								122D80-1	TBA	Gray /3.1		Silver / 3.5		1911V3-6	TBA	1911U1-3	TBA		
		127476-7	TBA									**162745-9	TBA								
	4.8	4.8		327281-4	65.60	327B83-0	TBA	Black / 4.8		Black /3.6		Black / 4.2		191F79-9	175.30	191C03-4	TBA				
		127225-2	77.10					199731-7	69.60	127475-9	21.60	**162744-1	TBA								
	*4.8	4.8 S						127689-0	TBA	Silver / 6.4		Black /3.6		Black / 4.2		1911V1-0	TBA	1911T9-0	TBA		
		127689-0	TBA							199730-9	87.80	127475-9	21.60	**162744-1	TBA						
	DRV250	6.0	6.0					Marking on 6.4	Marking on 6.4S	Silver / 6.4			Gray / 4.0		Black / 4.2		199725-2	TBA	-	-	
			127224-4										TBA	127474-1	TBA	162744-1					TBA
*6.0		6.0 S		327279-1	195.40	327830-7	TBA	Gray /4.0					Black / 4.2		1911V0-2	117.00					
		122D79-6	TBA					127474-1	TBA				162744-1	TBA							
6.4		6.4		127223-6	56.30	199730-9	87.80	Black / 4.5		Silver / 4.6		191F78-1	175.30								
		127473-3	22.00					162743-3	55.90												
*6.4		6.4 S		327281-4	65.60			327831-5	TBA	Black / 4.5		Silver / 4.6		1911U8-9	TBA						
		122B72-8	TBA							127473-3	22.00	162743-3	55.90								

Grease set

Still photo	Description	Related models	Part No.	RSP (RM)
	5g for Jaw grease	DRV150, DRV250	191D57-7	27.30

Tool protector

Still photo	Name	Related models	Color	Part No.	RSP (RM)
	Protector set A	DRV150	Clear	191G65-6	468.70
	Protector set B	DRV250	Clear	191G66-4	391.20

Extension handle for rebar tying tool

Still photo	Name	Related models	Part No.	RSP (RM)
	Extension handle set	DTR180, DTR181	191M27-0	1,113.50

Wire guide


Still photo	Name	Related models	Part No.	RSP (RM)
	Wire guide B complete (EG) set	DTR181	1913F2-8	399.00

Tie wire set

Ø0.8mm, 50 pcs/ box

Still photo	Name	Related models	Wire length/ bobbin	Description	Part No.	RSP (RM)
	Poly coated tie wire set	DTR180, DTR181	-	Poly coated	191J59-9	2,169.00
	Tie wire set	DTR180, DTR181	Approx 100m	Standard	199137-9	1,000.00

Pin nail



Model No.	Type	Length	Part No.	RSP (RM)
DPT353, PT354D, PT001G	23Ga (φ0.6) Pin Nail (10,000 pcs/box)	18mm (11/16")	F-31825	62.60
		25mm (1")	F-31838	78.20
		30mm (1-3/16")	F-31841	87.70
		35mm (1-3/8")	F-31854	99.90

Brad nail



Model No.	Type	Length	Part No.	RSP (RM)
DFN350, FN001G	18Ga Brad Nail (5,000 pcs/box)	15mm (5/8")	F-31867	49.90
		20mm (3/4")	F-31870	61.90
		25mm (1")	F-31883	71.90
		30mm (1-3/16")	F-31896	84.00
		35mm (1-3/8")	F-31915	96.80

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer / Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Thakita

Accessory

Vacuum Cleaner System Charts

For Dust Collecting *for Model DVC261, DVC265, DVC660, DVC665 only

Hose connection 28

Hose connection 38

Model
VC006GMModel
VC002GL
DVC864L
DVC863L
DVC860L
DVC157LModel
VC3210L
VC2510LModel
VC009G
DVC261Model
DVC750L

Hose 28 mm

1.0 m *143787-2 without front cuffs
 1.5 m A-34235 with front cuffs 22, 38
 3.5 m 195433-3 with front cuffs 22, 24, 38
 5.0 m 195436-7 with front cuffs 22, 24, 38
 5.0 m A-34229 with front cuffs 22, 38



Hose 38 mm

with front cuffs 38
 2.5 m 195434-1
 5.0 m 195435-9



Front cuffs

Front cuffs 38
195545-2Front cuffs 22
195547-8Front cuffs 24
195546-0

Joint 22-38

195548-6

Front cuffs 24
195546-0

Attachments



AWS

Auto-start Wireless System

Wireless unit adapter
199393-1WUT02
199809-6

Converts tool-triggered
 AC vacuum cleaners in the market into
 AWS-compatible vacuum cleaners




Front cuffs, Joint & Hose Connection

28-A Hose 28mm

Supplied with both
Front cuffs 22 and 38

Rear cuffs (free)

Front cuffs 38:
Inner dia. 38.0mm,
Outer dia. 44.2mmFront cuffs 22:
Inner dia. 22.4mm,
Outer dia. 25.0mm

38-A Hose 38mm



Front cuffs 38

Rear cuffs (free)

Front cuffs 38:
Inner dia. 38.0mm,
Outer dia. 44.2mm

Front cuffs 38, Front cuffs 22 and Front cuffs 24 connection


28-A

Hose 28
with Front cuffs 22

28-A

Hose 28
with Front cuffs 38

38-A

Hose 38
with Front cuffs 38

Front cuffs 24



Hose to hose connection

28-A Hose 28 with Front cuffs 38



28-A Hose 28 Rear cuffs



38-A Hose 38 with Front cuffs 38



38-A Hose 38 Rear cuffs



Joint 22-38 connection & size

38-A

Hose with Front cuffs 38



Joint 22-38

Size:
 Inner dia. 22.4mm,
 Outer dia. 25.0mm



*All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights


Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
-INT-

Vacuum Cleaner System charts

For Cleaning *For Model DVC261, DVC265, DVC660, DVC665, VC008G, VC009G, VC011G only

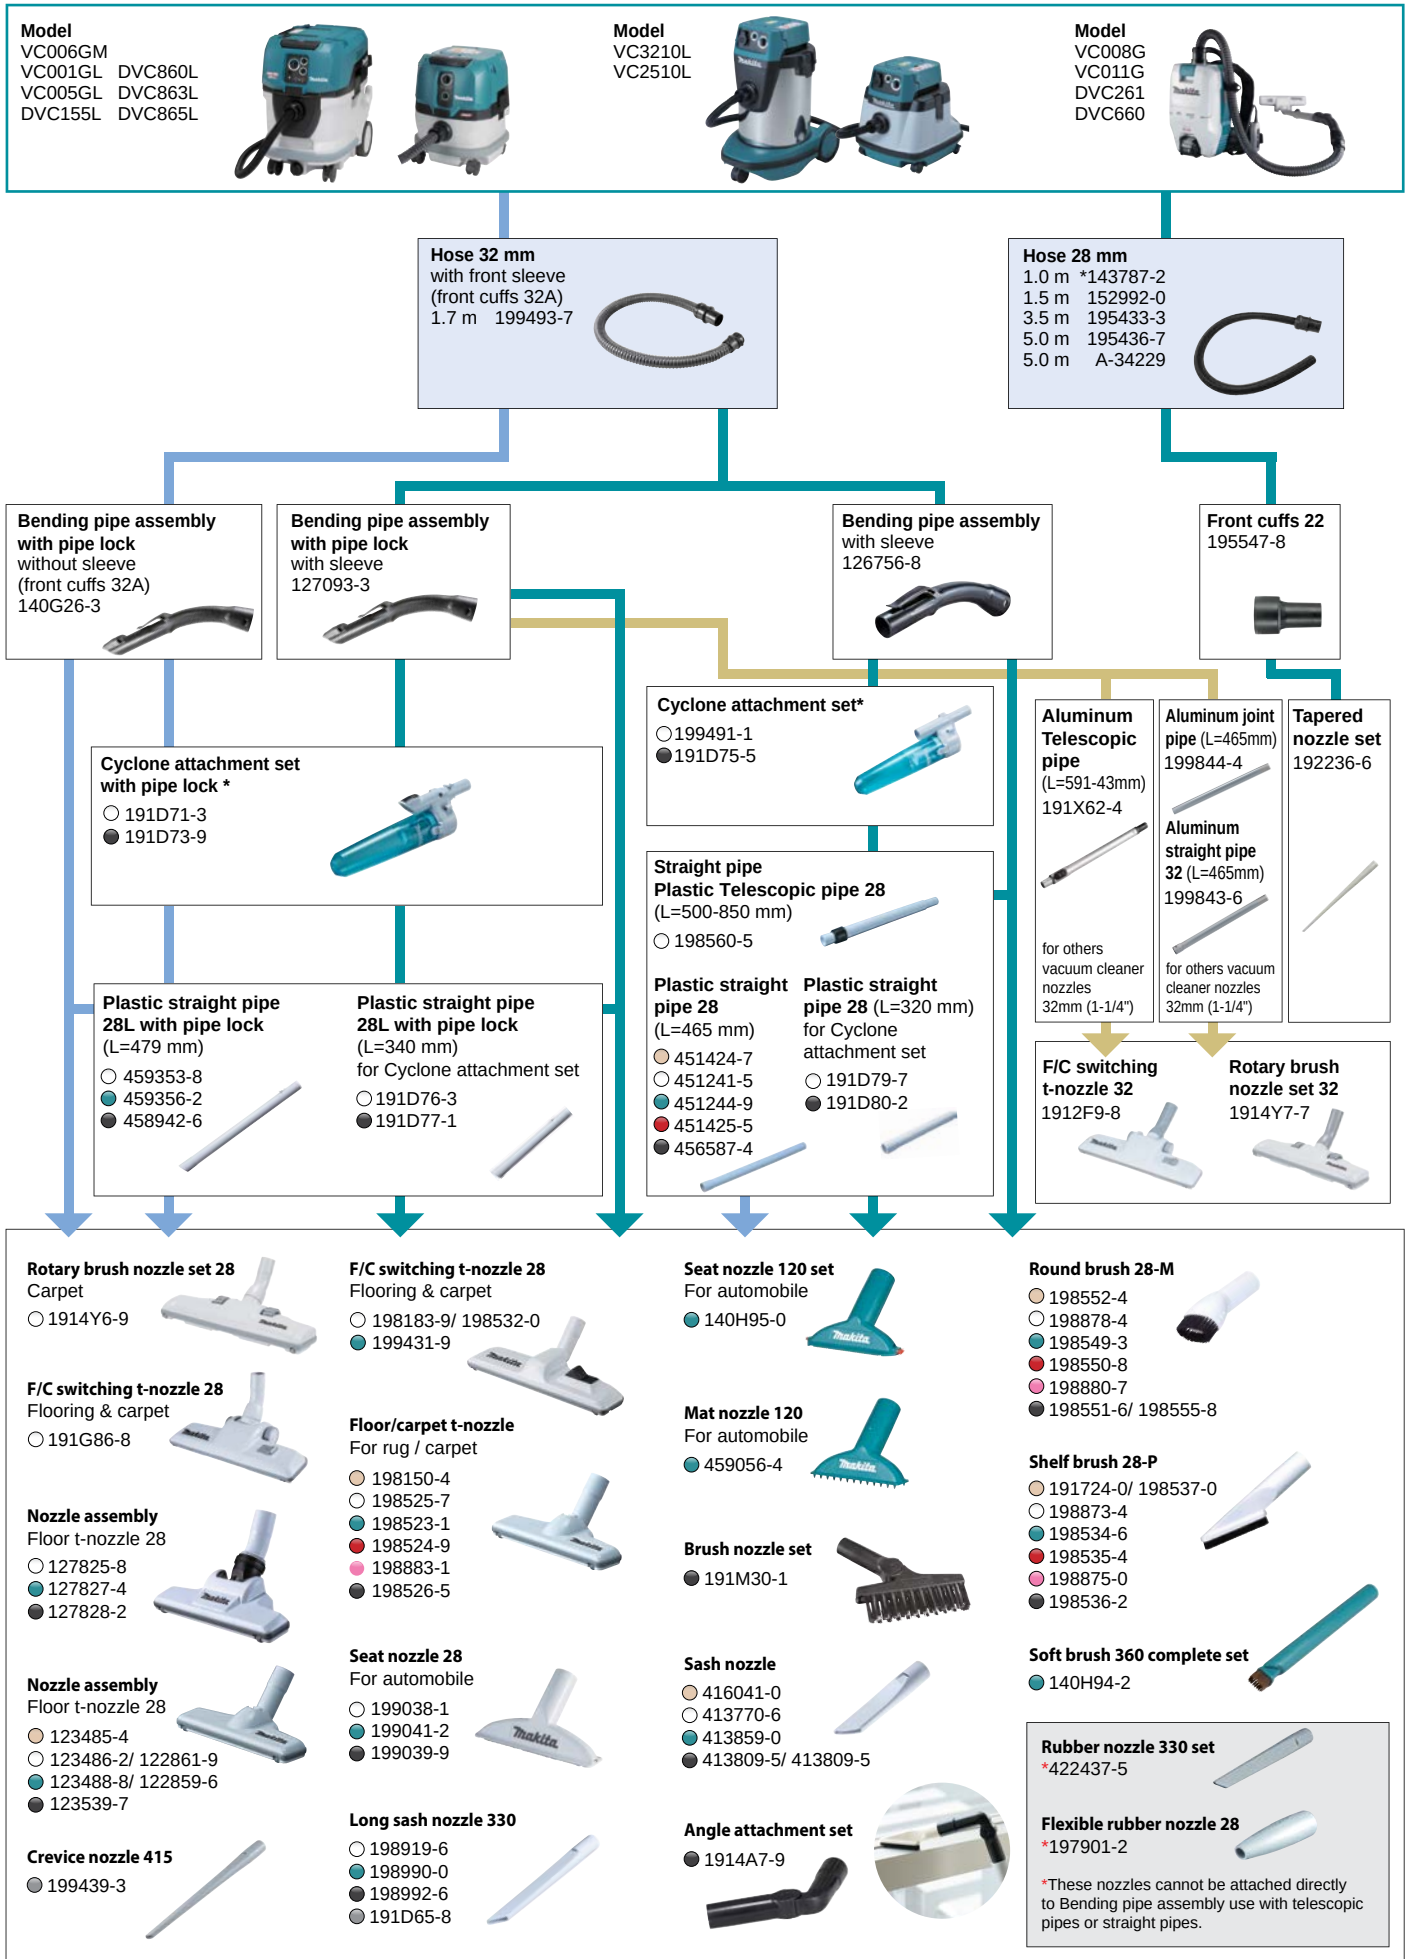

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Makita

Accessory

Vacuum Cleaner System Charts
For Cleaning

Model
VC006GM
VC001GL
VC005GL
DVC155L
DVC860L
DVC863L
DVC865L



Model
VC3211M
VC2211M
VC3210L
VC2510L



Model
VC008G
VC011G
DVC261
DVC660



Hose 38 mm
2.5 m 195434-1
5 m 195435-9



Bent pipe
192562-3



Straight pipe
192563-1



38mm Tip attachments

F/C switching t-nozzle
Flooring & carpet (Dry)
198184-7



Universal type (Dry/ Wet)
195551-7



F/C switching t-nozzle 38
Flooring & carpet (Dry)
191G87-6



Corner nozzle
410306-2



Round brush
191657-9



Model
DCL184
CL121D



Flexible rubber nozzle 28
197901-2



28mm Tip attachments



Blower nozzle complete
140J64-3



38 mm Tip
attachments

28 mm Tip
attachments

Cleaning set
-Hose complete 38-2.5
-Straight pipe
-Bending pipe
-Nozzle assembly
-Corner nozzle
195439-1



System Charts

A



W/ Ø28mm Hose

Model

VC002GL / VC004GL
DVC157L / DVC867L
VC2510L / VC1310LVC3211H /
VC3211M
VC2211M / VC3210LVC008G / VC009G
VC011G / VC012G
DVC660 / DVC665
DVC261 / DVC265

DVC350

W/ Front cuffs



38 24 22

B



W/ Ø38mm Hose

Model

VC001GL / VC003GL
VC005GLDVC155L DVC156L /
DVC860L DVC861L /
DVC865L DVC866L /
DVC750L


W/ Joint 22-38



Demolition hammer & Rotary hammer



A B
Front cuffs
22 or 38



*grip base for dust cup is also necessary

**With Sensomatic chip

	Model	Operation mode	Vacuum attachment set		Cuffs size
			Type	Parts No.	
Electric breaker	HM004G, HM1306, HM1307C, HM1317C, HM1802, HM1812	-	W/o Hose	197168-2	Hose 28 without cuffs
		-	W/ Hose	197148-8	Cuffs 24 or cuffs 38
Rotary hammer	DHR400, HR005G, HR4013C, HR4003C	Drilling / Hammer	-	197148-8	Cuffs 22
	HR5212C, HR5202C	Drilling / Hammer	-	196858-4	Cuffs 22
	HR2670	Chipping / chiseling	-	1914L9-2	Cuffs 22



A B
Front cuffs
22



*grip base for dust cup is also necessary

	Model	Operation mode	Vacuum attachment set		Cuffs size
			Type	Parts No.	
Rotary hammer	All Rotary hammer	Drilling	Dust cup set	1914X3-8	Cuffs 22 + 24
	HR140D, HR166D, DHR165, DHR171, DHR182, DHR202, DHR262, DHR263, HR1840, HR2230, HR2470, HR2810	Drilling	Dust collector set	193472-7	Cuffs 22
	*DHR165, *HR166D, *DHR171, *DHR182, *DHR202, *DHR241, *DHR262, DHR263, *HR1840, *HR1841F, *HR2230, HR2470, HR2810	All	Dust cup set	198362-9	Cuffs 22
	DHR242, DHR280, DHR282, HR001G, HR003G, HR2300, HR2630, HR2631F, HR2652, HR3001C, HR3011F, HR007G	All	Dust cup set	195173-3	Cuffs 22
	DHR281, HR002G, HR2320T, HR2631FT	All	Dust cup set	195179-1	Cuffs 22
	DHR183, HR010G	Drilling	Dust cup set	1911P8-4	Cuffs 22
	HR2670	Drilling	Dust cup set	1914L7-6	Cuffs 22

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Makita
mit

Accessory

System Charts

Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Speciality
Tools

Accessory


Makita

Makita

Circular saw and Plunge Cut Circular Saw

*Inner flange is also necessary.


**with shortlever



Model	Dustnozzle set and Jointset		Cuffs size
	Description	Parts No.	
HS012G, DHS680	Dust nozzle set	196952-2	Cuffs 24
DHS710, DHS782, DHS783, HS7010	Dust nozzle set	196520-1	Cuffs 24
HS009G, HS010G, HS011G	-	-	Cuffs 24
HS013G	Dust nozzle set	450316-7	Cuffs 38
DHS900, DHS901, DSP600, DSP601	-	-	Cuffs 24
N5900B	Joint set	193068-4	Cuffs 38
HS6600	Dust nozzle set	198933-2 / 196520-1	Cuffs 24
HS7600	Dust nozzle set	196520-1	Cuffs 24
HS7010	Dust nozzle set	198933-2	Cuffs 24
SP6000, SP001G	-	-	Cuffs 24

Angle grinder to diamond wheel

*Inner flange is also necessary.



Model	Dust collection wheel guard for diamond wheel		Cuffs size
	Wheel guard type	Parts No.	
100mm Triple notches bearing box models	A	198414-6	Cuffs 22
	C	199294-3	Cuffs 38
100mm Single notch bearing box models	A	198413-8	Cuffs 22
	C	199295-1	Cuffs 38
125mm Triple notches bearing box models	A	198416-2	Cuffs 22
	C	196845-3	Cuffs 38
125mm Single notch bearing box models	A	198415-4	Cuffs 38
	B	192968-5/192972-4	Cuffs 38
	C	196846-1	Cuffs 38
125mm X-Lock models	C	191G05-4	Cuffs 38
125mm Toolless wheel cover (Slide lever style) models	C	191G06-2	Cuffs 38
180mm Triple notches bearing box without brake models	D	*198514-2	Cuffs 38
180mm Twin notches bearing box models & Single notch bearing box models	B	194303-3	Cuffs 38
230mm Triple notches bearing box without brake models	D	198379-2 (M14 spindle)	Cuffs 38
230mm Twin notches bearing box models & Single notch bearing box models	B	194044-1	Cuffs 38
230mm Single notch bearing box models	D	198380-7 (M14 spindle) *198380-7 (M16 spindle)	Cuffs 38
	B	194044-1	Cuffs 38

Angle grinder to cup diamond wheel




Model	Dust collection wheel guard for cup diamond wheel		Cuffs size
	Wheel size	Parts No.	
125mm Single notch bearing box models	125mm	195250-1	Cuffs 38
180mm / 230mm Twin notches bearing box models	180mm	195387-4	Cuffs 38

* All recommended selling price (RSP) shown are for reference only (exclude SST).

System Charts

For Model	Suction Systems and Part No.
Belt Sander BO001CG, BO002CG, BO003CG, BO004CG, BO005CG, BO006CG BO007CG	Front cuffs 22 413Y47-9 
	Direct connection to hose 28
Finishing Sander DBO380, DBO481, 9046, BO3711, BO4556	
Random Orbit Sander BO5030, BO5031, BO5040, BO5041, BO6030, DBO180	
Belt Sander BS001G 9404	
Cordless Drywall Sander DSL801	Front cuffs24 195546-0 
	A Front cuffs 22 
	B Front cuffs 22-38 195548-6 

For Model	Suction Systems and Part No.
Jig Saw JV183D, 4327, 4329, JV0600	 
Cordless Jig Saw DJV180	Dust Nozzle 417853-4 
Jig Saw 4350CT	
Cordless Jig Saw DJV181, DJV182 DJV184, DJV185 JV001G, JV002G JV102D, JV103D	Dust nozzle assembly 126331-0 413F05-1 122C71-6 457801-1 
 	Front cuffs 24 195546-0 
Cordless Multi Tool DTM52, TM001G DTM51 DTM50	Dust attachment set 191R02-6 199627-2 199621-4 
	Multi Tool TM3010C 
	A Front cuffs 22 
	B Front cuffs 22-38 195548-6 



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Accessory

Makita

Accessory
System Charts

- Screwing / Drilling
- Stirring
- Hammer Drilling / Chiselling
- Grinding / Sanding / Polishing
- Cutting
- Sawing
- Milling / Planing
- Fastening / Fixing
- Cleaning
- Lawn Care / Grass Care
- Tree Care / Hedge Care
- Transportation
- Lights
- Comfort / Lifestyle
- Speciality Tools
- Accessory
- Makita

For Model	Suction Systems and Part No.
Angle Cutter 4114S 	Elbow joint 32 192613-2 
Dustless Cutter 4100KB 	Cordless Dustless Cutter DCC500 
Wall Chaser SG1251 	Concrete Planer PC5000C, PC5001C, PC5010C 
Belt Sander 9924DB 	Joint 32 192518-6 

A

Front cuffs
38



B






For Model	Suction Systems and Part No.
Cordless Slide Compound Miter Saw DLS713, DLS714 	
Slide Compound Saw LS0714, LS1018/L, LS1110F 	
Miter Saw LS1030N 	
Miter Saw LS1440 	
Compound Miter Saw LS1040 	A Front cuffs 38*  *Except model: VC008G / VC009G DVC660 / DVC665 DVC261 / DVC265
Cordless Compound Miter Saw DLS600 	
Flip Over Saw LF1000 	
Table Top Miter Saw LH1201FL 	
Slide Compound Saw LS1019/L, LS1219/L 	Front cuffs 24 195546-0 
Cordless Slide Compound Miter Saw LS002G, LS003G, LS004G, DLS111, DLS211 	

B



* All recommended selling price (RSP) shown are for reference only (exclude SST).

System Charts

For Model	Suction Systems and Part No.
Table Saw 2704 	Joint 419093-0 
Table Saw MLT100N 	Dust port JM27000090 
Table Saw 2712 	
Planer 2012NB 	Hood set 193036-7 Outer dia. 76 mm 



*Except model:
VC008G / VC009G
DVC660 / DVC665
DVC261 / DVC265
DVC350



For inner dia. 76 mm
Hose Vacuum Cleaner

For Model	Suction Systems and Part No.
Power Planer KP001G, DKP181, KP0810/C 	
Power Planer DKP180, KP0800 	Nozzle 451329-1 
Power Planer 1911B 	Nozzle for vacuum cleaner 192082-7 
Power Planer KP0800 	



*DVC350
Cannot be used
with Planer models



Nozzle assembly



Model No.	Part No.
KP0800, DKP180	451329-1




Accessory

System Charts

- Screwing / Drilling
- Stirring
- Hammer Drilling / Chiselling
- Grinding / Sanding / Polishing
- Cutting
- Sawing
- Milling / Planing
- Fastening / Fixing
- Cleaning
- Lawn Care / Grass Care
- Tree Care / Hedge Care
- Transportation
- Lights
- Comfort / Lifestyle
- Speciality Tools
- Accessory
- Makita

For Model	Suction Systems and Part No.	
Plate Joiner PJ7000, DPJ180		
Cordless Cut-out Tool DCO181, DCO180	Dust collection cover 193449-2	A Front cuffs 22*  *DVC350 Cannot be used w Router models
		
Cordless Drywall saw DSD180, SD100D		B Front cuffs 22-38  195548-6
		

For Model		Suction Systems and Part No.	
Cordless Router RP001G		Dust nozzle 194934-8	
Router RP1801, RP2303FC, RP2301FC			
3612C	192035-6		
Router RP0900, **RT0700C		Dust nozzle 194733-8	
Cordless Router **RT001G, **DRT50			
** Use with Plunge base assembly			
Trimmer RT0700C,		Dust nozzle 195559-1	
Cordless Trimmer RT001G, DRT50			

A
Front cuffs
38


B


Makita recommend to use 38mm hose when you use Router



*All recommended selling price (RSP) shown are for reference only (exclude SST).

Filter & Dust Bag



for Wet & Dry

Cloth filter or Water filter (Water only)

Compatible with usual Poly bags or Paper filters, allowing for:




- Quick and easy dust disposal
- Lower-running cost compared with paper dust bag




		VC006GM	VC001GL	VC002GL VC005GL	DVC865L DVC860L DVC155L	DVC864L DVC863L DVC157L	VC3211M	VC3210L	VC2510L
		(Wet & Dry)	(Wet & Dry)	(Dry)	(Wet & Dry)	(Dry)	(Wet & Dry)	(Wet & Dry)	(Wet & Dry)
Use as a set	Powder filter set Dry only *HEPA filter for Dry use only	1911B6-0 *1911B7-8 	*191V70-3 		*197166-6 			195441-4 	
	Damper set	1911B4-4 	191V68-0 		195552-5 			195552-5 	
	Pre-filter set	1911B5-2 	191V69-8 		195553-3 		196253-8 		
Cloth filter Wet & Dry			144625-1 	144625-1 191V71-1 (VC005G only)	140248-3 				
Water filter Wet only It is recommended using water filter when picking up large amount of water repeatedly		1910N0-0 	191V67-2 						
Filter bag set 15L 5 pcs for dry dust		35 L: 1910Y4-9 				195557-5 			195557-5
Poly bag set (10 pcs)		1910R3-2 	195432-5 				195440-6 		

To use powder filter, remove the float cage and float by removing the bolts.



Capacity up tank set
DVC860L, DVC861L, DVC865L,
DVC866L, DVC867L
191B56-7, 191B57-5*
* "HEPA filter" Mark on tank



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Accessory

Makita

Accessory

Cordless Cleaner System Charts

With pipe lock Model:

- CL001G ○ ● ● ● ●
 CL002G ○ ● ● ● ●
 CL003G ○ ● ● ● ●
 DCL284F ○ ● ● ● ●
 DCL286F ○ ● ● ● ●
- CL114FD ○ ● ● ● ●
 CL117FD ○ ● ● ● ●



Model:

- DCL180 ○ ● ● ● ●
 DCL181F ○ ● ● ● ●
 DCL182 ○ ● ● ● ●
 CL183D ○ ● ● ● ●
 CL106FD ○ ● ● ● ●
 CL107FD ○ ● ● ● ●
- CL108FD ○ ● ● ● ●
 CL100D ○ ● ● ● ●



Model:

- CL070D ○ ● ● ● ●
 CL072D ○ ● ● ● ●



Cyclone attachment set with pipe lock

- 191D71-3
 ● 191D73-9



Cyclone attachment set

- 199491-1
 ● 191D75-5



Flexible hose set 191E30-3



- Straight pipe with pipe lock**
Plastic straight pipe 28L with pipe lock
 (L=340mm)
 for Cyclone attachment set
- 191D76-3
 ● 191D77-1



Straight pipe 28-J

Plastic Telescopic pipe 28
(L = 500-850 mm)


- 198560-5

Aluminum Telescopic pipe
(L = 590 to 942 mm)

- 140G19-0

Plastic straight pipe 28
(L=465mm)

- 451424-7
 ○ 451241-5
 ● 451244-9
 ● 451425-5
 ● 456587-4

Plastic straight pipe 28 (L=320mm)
for Cyclone attachment set

- 191D79-7
 ● 191D80-2



Flexible hose set 28

- 191496-7
 ○ 198868-7
 ● 198541-9/ 198545-1
 ● 198542-7
 ● 198871-8
 ● 198547-7



28 mm Tip attachments

Nozzle assembly
Floor t-nozzle 28

- 127825-8
 ● 127827-4
 ● 127828-2

Nozzle assembly
For rug / carpet

- 122291-4



Crevice nozzle 415

- 199439-3

Rubber nozzle 330 set
*422437-5

*These nozzles cannot be attached directly to Bending pipe assembly use with telescopic pipes or straight pipes.

F/C switching t-nozzle 28
Flooring & carpet

- 191G86-8

Seat nozzle 28
For automobile

- 199038-1
 ● 199041-2
 ● 199039-9




Round brush 28-M

- 198552-4
 ○ 198878-4
 ● 198549-3
 ● 198555-8

Holder set
199971-7

Model: CL001G, CL002G, DCL284F, DCL180, DCL180F, DCL181F, DCL182, DCL182F, CL114FD, CL107FD

F/C switching t-nozzle 28-L
Flooring & carpet

- 198183-9/ 198532-0
 ● 199431-9

Seat nozzle 120 set
For automobile

- 140H95-0



Shelf brush 28-P

- 198537-0
 ○ 198873-4
 ● 198534-6
 ● 198536-2/ 198540-1a

Nozzle assembly
Floor T-nozzle 28

- 123485-4
 ○ 123486-2/ 122861-9
 ● 123488-8/ 122859-6
 ● 123539-7



Brush nozzle set

- 191M30-1

Soft brush 360
complete set

- 140H94-2

Cleaner stand set
1911L1-0

For holding Makita cordless cleaner in an upright position.

Model: CL001G, CL002G, CL003G, CL100D, CL106FD, CL107FD, CL108FD, CL111D, CL114FD, CL117FD, CL183D, DCL180, DCL181F, DCL182, DCL284F, DCL286F

Floor/carpet t-nozzle
For rug / carpet

- 198150-4
 ○ 198525-7
 ● 198523-1
 ● 198524-9
 ● 198883-1
 ● 198526-5



Sash nozzle 28-O

- 416041-0
 ○ 413770-6
 ● 413859-0
 ● 456586-6/ 413809-5



Angle attachment set

- 1914A7-9



Long sash nozzle 28-N


- 198919-6
 ● 198990-0
 ● 198992-6
 ● 191D65-8



Cordless Cleaner System Charts


Capsule type cleaner

Model: CL001G, GDCL281F, DCL284F, DCL280F, DCL181F, DCL180F, DCL180, CL183D, CL108FD, CL106FD, CL070D

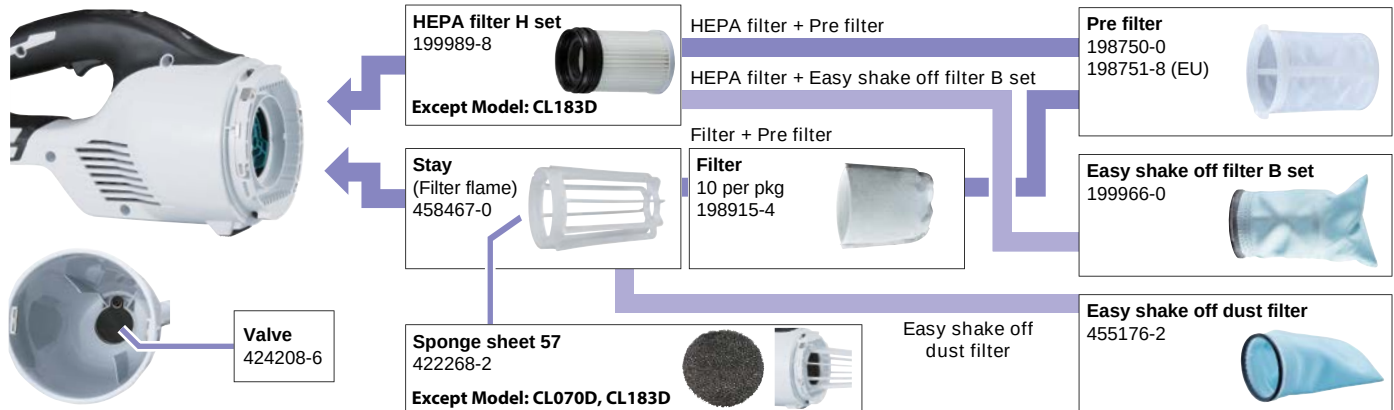

Paper bag type cleaner

Model: CL002G, DCL282F, DCL182, DCL182F, CL114FD, CL121D, CL107FD, DCL184, CL121D

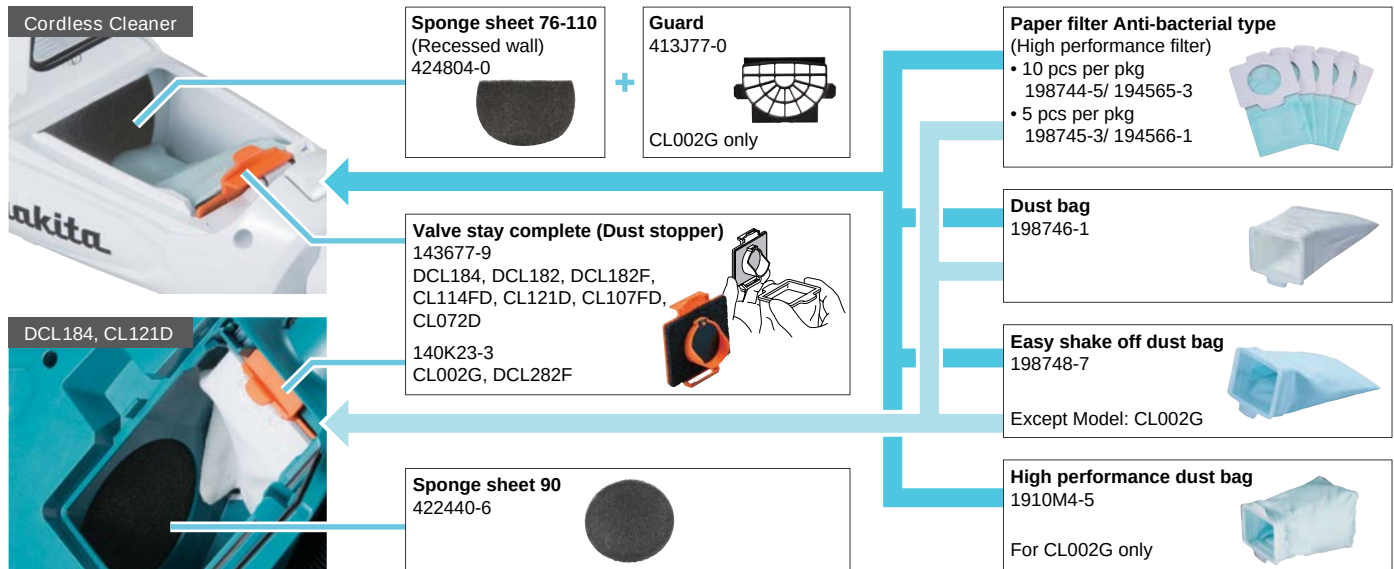

New cyclone unit

Model: CL001G, CL003G, DCL283F, DCL284F, DCL286F, DCL180, DCL181F



Accessory

Cordless Cleaner System Charts

Cordless Upright Cleaner Model: VC010G, DVC560

28 mm Tip attachments

Seat nozzle 28

For automobile

- 199038-1
- 199041-2
- 199039-9



Long sash nozzle 330

- 198919-6
- 198990-0
- 198992-6
- 191D65-8



Seat nozzle 120 set

For automobile
140H95-0

Long Sash nozzle 415

- 199439-3




Mat nozzle 120

For automobile
459056-4

Round brush

- 198552-4
- 198878-4
- 198549-3 / 198553-2
- 198551-6 / 198555-8
- 191D67-4




Brush nozzle set

191M30-1



Shelf brush

- 198537-0
- 198873-4
- 198534-6 / 198538-8
- 198536-2 / 198540-1



Sash nozzle

- 416041-0
- 451240-7
- 451243-1
- 456586-6

Soft brush 360
complete set
140H94-2

Filter bag set

10 pcs set

Standard:

191D63-2

Performance:

191T96-3

Reusable
Dust Bag

191Y86-6



Main filter h set

191E39-5

**HEPA
filter**

Brush complete set

VC010G - 191D69-0

DVC560 - 1910T8-6



Cordless Portable Vacuum Cleaner Model: DVC750L

For Cleaning

Hose Complete

28-2.0m with
Front cuffs 38
140G04-3

38mm Tip Attachments

Wide Nozzle

458891-7

Sash Nozzle

458919-1



Round brush

191657-9

Corner nozzle

410306-2



Joint 22-38


195548-6

Tapered
Nozzle Set

192236-6

Joint 38
418500-028mm Tip
attachments

Dry only

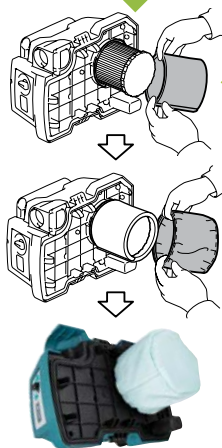Filter complete
(HEPA filter)

Dry 162518-0



Pre filter and Damper set

199827-4

Damper



Pre filter



Wet only



Wet filter set

191M39-3



Shoulder Belt Set

162523-7



Selectable Filter & Dust Bag

Backpack Vacuum Cleaner Model: VC008G, VC009G, VC011G, DVC660, DVC665, DVC260, DVC261, DVC265

VC011G, DVC660, DVC665



Dust bag assembly
191C30-1



Filter bag set (Paper dust bag)
10 per pkg
191C26-2



Main filter H set (HEPA filter)
191D12-9



VC008G, VC009G, DVC260, DVC261, DVC265



Dust bag assembly
197898-5
197899-3(EU)



Filter bag set (Paper dust bag)
10 per pkg
197903-8



Filter set assembly (HEPA filter)
127725-2 Model: DVC260, DVC261
191Y27-2 Model: VC008G, VC009G



Harness cover set

Washable harness cover made of a mesh material for improved breathability

**VC008G, VC009G,
VC011G, DVC660,
DVC665, DVC261,
DVC265**

191Y14-1



Protection cover set

When using Backpack vacuum cleaner in tight spaces etc., Protection cover is very helpful to prevent the scratches on surrounding objects caused by hitting cleaner.

DVC261, DVC265
1910S4-7


VC008G, VC009G
1914H7-8*

*For BO001CG series
with Battery case



Robotic Cleaner Model: DRC200, DRC300

DRC200

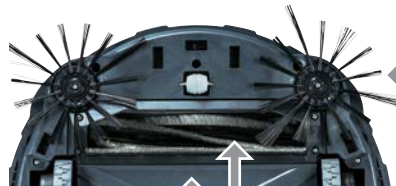

Side brushes
SH00000065



Power brush
SH00000063



Boundary line tape
(15m roll)
SH00000240 (USA, AU)




Turn brush cover
SH00000064



Filter
SH00000213



DRC300

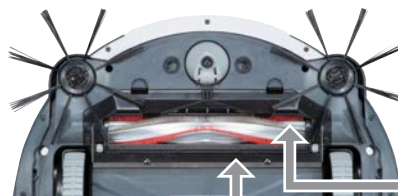

Side brush assembly set
191P26-0 (Soft) for tatami mats, etc
191P28-6 (Standard)



Main brush complete set
for tatami mats, etc
191P20-2 (Soft)
191P22-8 (Standard)



Magnet tape set
191P18-9
5m long,
with double-sided tape



Bottom plate assembly set
191P24-4



Filter H complete set
191P31-7

HEPA
filter



Sponge sheet set
191X35-7

Sponge part to be attached to Bumper for
protection of surrounding objects from damage



* All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory

Accessory

Accessory

Accessory

Accessory

Accessory

Cordless Polisher Scrubber and Cordless Vacuum Sweeper for accessories

Cordless Polisher Scrubber Model: PS001G

Brush 190
Brush bristle type: Soft
Application: For cleaning wooden floors, decks, etc.
1914T0-6



Brush bristle type: Medium
Application: For cleaning general interior floors.
1914T1-4



Brush bristle type: Hard
Application: For cleaning exterior concrete floors and removing grease stains from kitchens and similar areas.
1914T2-2



Brush bristle type: Hard (with abrasive)
Application: For cleaning porcelain tiles and similar surfaces.
1914T3-0



Floor pad	Cleaning ability*2	Cleaning surface	Application
Color*1: White 1914S5-9	Low	Smooth	For surface polishing of resin wax.
Color*1: Red 1914S6-7			
Color*1: Blue 1914S7-5			
Color*1: Brown 1914S8-3	High	Rough	For cleaning of resin wax.
Color*1: Black 1914S9-1			For removing resin wax.

*1 The brighter and lighter the color, the finer the grit; the darker and deeper the color, the coarser the grit (industry standard).

*2 Stain and wax removal power


Accessory bag set
An accessory bag made of water-resistant materials for carrying wet accessories. Capable of storing all accessories for this model.
1915D1-8







Pad holder 175 set
Pad holder for Floor pad 200 (used with Floor pad 200)
Attachment portion for the floor pad: hook and loop fastener
1914S4-1





Various pads can be attached to the hook-and-loop side.



Cordless Vacuum Sweeper Model: VS001G

Multi adapter set

- MAKPAC (all types) can be installed, which is also convenient for storing cleaning accessories.
- Portable power pack PDC01 /1200 /1500 can be installed to improve run time.

1913F5-2



Dust bag set

- Capacity: 47L (12.4 gal)
- Dust bag suitable for collecting bulky waste such as fallen leaves.
- Dust bag can be reused.

1913F7-8





* All recommended selling price (RSP) shown are for reference only (exclude SST).

Front cuffs & joint

Shape	Type	Part No.	RSP (RM)
	Front cuffs 22	195547-8	7.90
	Front cuffs 24	195546-0	11.40
	Front cuffs 38	195545-2	19.80
	Joint 22-38	195548-6	31.00
	Joint 38	418500-0	14.80

Filter & bag

Name	Per pkg.	Related models	Part No.	RSP (RM)
Fleece filter bag (Filter bag)	5	VC2000L	P-72899	218.20
Pre Disposal bag	5		P-70297	290.00
PET Filtecelent	1	VC2512L, VC3011L, VC3012M / L	P-70219	165.40
Pre Disposal bag	5	VC2512L, VC3011L, VC3012M / L	P-70297	290.00

Dust bag for blower, cleaner

Still photo	Name	Related models	Part No.	RSP (RM)
	Dust bag assembly	DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	123241-2	41.10
	Dust bag	DUB187	GB00000185	85.90

Adapter

Still photo	Name	Related models	Reference	Part No.	RSP (RM)
	Adapter pipe 104-72 set	UB002C	104-72	1910M7-9	127.10
	Adapter pipe set MG	UB400MP, UB401MP	80-72	191C15-7	56.80
	Adapter pipe 71 set	DUB362, DUB363	71	191J13-3	66.20
	Adapter pipe 80-72 set	DUB184	80-72	191L13-5	34.00
	Adapter pipe 85-72 set	UB001C, UB001G, UB003C	85-72	191L96-5	71.90

Nozzle for blower, cleaner

*use with adapter

Still photo	Name	Related models	Description	Part No.	RSP (RM)
	Nozzle assembly	DUB185, DUB186, UB100D, UB101D, UB1102, UB1103	Length 0.22m	123245-4	18.20
	Garden nozzle assembly set		Length 0.54m	191G09-6	30.80
	Anchor nozzle set		Use with Nozzle assembly	192236-6	29.40
	Flexible hose set		-	191M34-3	89.10
	Water blowing nozzle set	DUB184	Width 217mm	1915C8-7	105.90
	End nozzle 74 set	UB004C	Diameter 74mm	1914H0-2	89.50
	Flat nozzle set	UB004C	-	1914H1-0	106.40

Still photo	Name	Related models	Description	Part No.	RSP (RM)
	Gutter nozzle set	*DUB184, *DUB362, *UB001C, *UB001G	Length 2.9m	191B03-8	680.40
	Extension nozzle set	DUB184, DUB362, DUB363, UB001C, UB001G, UB002C, UB003C	DUB184, UB001C, UB002C, UB003C, UB001G: use with Adapter pipe	197888-8	67.50
	Flat nozzle set			197889-6	64.00
	T shape vacuume nozzle assy	DUB187	Dust collection can be efficiently performed on flat ground, etc.	GB00000165	37.10

Hose



Description	Size (mm)	Part No.	RSP (RM)
without front sleeve	28 mm - 1 m	143787-2	152.00

Bending pipe assembly

*with Hose 28 sleeve



Description	Part No.	RSP (RM)
For Aluminum Telescopic pipe assembly with lock	*127093-3	72.80

Nozzle assembly



Model	Size (mm)	Part No.	RSP (RM)
DVC350	220	132025-7	23.50
	430	134182-7	65.00

Dust bag

For DVC350.

Part No.	RSP (RM)
122918-6	104.60



Flexible hose set

Total length 95 cm.



Model	Part No.	RSP (RM)
DUB182, UB1100, UB1101	191750-9	TBA

Quick charger

AC only.



Model	Charging Time (approx)	Part No.	RSP (RM)
CL104D, CL105D, CL111D	180 min	DC1001/ 196832-2	128.00

Accessory

Hose stand

For model
VC1310L, VC2211M,
VC2510L, VC3210L,
VC3211M



Part No	RSP (RM)
197323-6	1,241.10

Holder set 10-33

Part No	RSP (RM)
195544-4	5.00



For CL121D, DCL184

Shape	Description	Part No	RSP (RM)
	Mat nozzle 120	459056-4	12.80
	Seat nozzle 120 complete	140H95-0	30.00
	Rubber nozzle 330	422437-5	38.00
	Soft brush 360 complete	140H94-2	21.90

For DCL501

Shape	Description	Part No	RSP (RM)
	Hose	SH00000034	269.80
	Straight pipe (Adjustable length)	SH00000060	330.20
	Nozzle assembly (Flooring & carpet)	SH00000058	92.30
	Crevice nozzle	SH00000042	55.70

Wiper nozzle set

For blowing away.



Model	Part No	RSP (RM)
DUB185, DUB186, UB100D , UB101D, UB1102, UB1103	191M32-7	65.30

Brush nozzle set



Model	Part No	RSP (RM)
DUB185, DUB186, UB100D , UB101D, UB1102, UB1103	191M30-1	58.60

Nozzle assembly, bending long nozzle set for vacuum & blow



Model	Size (mm)	Part No	RSP (RM)
DUB182, DVC350	220	132025-7	23.50
	430	134182-7	65.00

Pipe, end pipe, flat nozzle & others accessory

Model	Item	Part No	RSP (RM)
DUB184	Front Nozzle Set 	183P96-3	35.90
DUB362	Long Nozzle Set 	183R02-0	28.60
DUB363	End Nozzle 72 Set 	183R01-2	25.80
DUB363	Pipe 90-72 Assembly Set 	183R06-2	45.80
UB001G DUB184 DUB362	Shoulder belt 	166094-6	15.00

Cordless dust blower accessories

For model: AS001G, DAS180.

*1 used by attaching to Nozzle 13 and air vent hose.

Item	Description	Part No	RSP (RM)
Nozzle 13 set  	Nozzle diameter Ø 13 mm Nozzle diameter: Ø 13 mm (same as the caliber of the machine). • For blow-off works. • For inflating large play pools, etc.	191X15-3	11.00
Nozzle 7 set  	Nozzle diameter Ø 7.0 mm. For filter cleaning.	191X13-7	11.00
Nozzle 3 set  	Nozzle diameter Ø 3.0 mm.	191X11-1	10.60
Flexible nozzle complete set  	Nozzle diameter Ø 6.0 x 800 (hose) for blowing dust away from OA equipment or narrow spaces where this machine cannot enter.	191X21-8	71.70
Wide range nozzle set  	Nozzle diameter Ø 6.0 mm (each hole) for wide range blow-off.	191X19-5	25.30
Pinch valve nozzle set  	Nozzle diameter Ø 7.0 mm for inflating/ deflating inner tubes and beach balls.	191X17-9	15.50
Long nozzle set  	Nozzle diameter Ø 8.0 mm. • For cleaning anchor holes. • For cleaning narrow spaces that are out of reach. Nozzle 13 set (191X15-3) is also necessary.	191X78-9	59.00
Air vent hose complete set 	Nozzle diameter 13 mm (Same as the caliber of the machine) for inflating/ deflating inner tubes and beach balls. *Remove Dust cap complete from the machine and attach this hose.	191X23-4	131.30
Rubber attachment 20-30 set  	Nozzle diameter 7.0 mm for deflation large play pools and inflatable beds etc. *1 air vent hose complete set (191X23-4) and nozzle 13 set (191X15-3) are also necessary.	191X25-0	23.50
Rubber attachment 65 set  	Nozzle diameter: Ø 65 mm For deflating futon (bedding) compression bag. *1 air vent hose complete set (191X23-4) and nozzle 13 set (191X15-3) are also necessary.	191X27-6	24.40
Filter C complete set  	For use of the machine in a dusty environment. *Remove dust cap complete from the machine and attach this filter.	191X29-2	30.80

Screwing /
Drilling

Stirring

Hammer
Drilling /
ChisellingGrinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
PlaningFastening /
Fixing

Cleaning

Lawn Care /
Grass CareTree Care /
Hedge Care

Transportation

Lights

Comfort /
LifestyleSpecialty
Tools

Accessory



Accessory

Power washer accessories
for DHW080 & HW001G

Item	Model	Part No	RSP (RM)
Trigger gun set	DHW080 HW001G	197842-2	152.80
Variospray nozzle set	HW001G	1912Y4-1	129.00
Variospray nozzle ext. set	HW001G	1912Y5-9	184.00
Variospray lance set	HW001G	1912Y6-7	TBA
Variable nozzle set	DHW080 HW001G	197822-8	66.20
Vario spray lance set	DHW080 HW001G	191U88-8	199.90
Vario spray nozzle set	DHW080	191U86-2	143.10
Variospray lance set	DHW080 HW001G	197876-5	145.50
Cyclone jet nozzle set	DHW080 HW001G	197824-4	69.90
Cyclone guard set	DHW080 HW001G	197864-2	122.40
Under body spray lance set	DHW080 HW001G	197859-5	207.90
	HW1200 HW1300	198909-9	173.70
Extension pipe set (0.9 m / 1.3 m / 1.7 m)	DHW080 HW001G	197870-7	397.10
Rotating brush set	DHW080 HW001G	197831-7	94.20
Wash brush set	DHW080 HW001G	197828-6	47.10
Foam nozzle set	DHW080	197886-2	105.30
	HW001G	1912Y2-5	112.60
Pipe cleaning hose	DHW080 HW001G	10 m - 197837-5	278.20
		15 m - 197840-6	325.00
High pressure extension hose	DHW080 HW001G	5 m - 197845-6	209.50
		8 m - 197847-2	281.50
		10 m - 197850-3	419.50
High pressure hose	DHW001G DHW080	5 m - 126766-5	102.60
	DHW080	10 m - 123784-4 (PVC)	153.30
		10 m - 123651-3 (Rubber)	275.50

Item	Model	Part No	RSP (RM)
Twist prevention joint set	DHW080 HW001G	197867-6	122.20
Self-suction hose set	DHW080 HW001G	197873-1	225.00
Hose assembly set (3 m)	DHW080 HW001G	1910R1-6	173.50
Self-suction hose set (0.6 m)	DHW080 HW001G	1910R2-4	217.70
Accessory joint set	DHW080 HW001G	197853-7	40.00
Absorption connector set	DHW080	197881-2	25.90
		122F22-7	TBA
One touch joint set	DHW080 HW001G	197883-8	25.90
Cleaner pin set	DHW080 HW001G	197879-9	13.10
Shoulder belt	DHW080	162523-7	22.30
Trolley	DHW080	TR00000002	927.30

Power washer accessories
for DHW180

Item	Model	Part No	RSP (RM)
Foam nozzle		LX00000001	56.40
Plastic bottle adapter		LX00000004	38.00
Angle nozzle		LX00000002	75.90
Wheel brush		LX00000003	63.70

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Blade Selection Guide

Blade type/ image											Screwing / Drilling
		Short and soft grass			Tall and hard grass			Bush including tree beginning to grow			Stirring
Nylon cord		←→									Hammer Drilling / Chiselling
Plastic blade		←→									Grinding / Sanding / Polishing
Metal blade			←→								Cutting
			←→								Sawing
				←→							Milling / Planing
Brushcutter blade				←→							Fastening / Fixing
Shredder blade					←→						Cleaning
Saw blade							←→				Lawn Care / Grass Care
Chisel blade							←→				Tree Care / Hedge Care
T.C.T saw blade		←→									Transportation
											Lights
											Comfort / Lifestyle
											Specialty Tools
											Accessory

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Accessory

Brush cutter blade

Hole Dia: 25.4 mm

Blade	Blade dia. / No. of teeth	Thickness	Model No.	Part No.	RSP (RM)
2-tooth blade 	305 mm / 2	2.0 mm	UR012G	195624-6	63.10
4-tooth blade 	230 mm / 4	1.8 mm	DUR368A, DUR368L, DUR369A, DUR369L, UR003G, UR007G, UR017G, UR201C, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	195150-5	53.70
	255 mm / 4	2.0 mm	DUR369A, DUR369L, UR007G, UR012G, UR201C	196895-8	53.50
8-tooth blade 	200 mm / 8	1.4 mm	DUR194	191Y44-2	52.80
3-tooth blade 	230 mm / 3	3.0 mm	DUR368A, DUR368L, DUR369A, DUR369L, UR003G, UR007G, UR101C, UR201C, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	195298-3	92.60
TCT Brush cutter blade 	230 mm / 36	1.25 mm	DUR369A, DUR369L, UR101C, UR201C	D-65981	96.40
	255 mm / 40	1.25 mm	DUR369A, DUR369L, UR003G, UR007G, UR101C, UR201C	D-65997	115.00

Special blade & protection guard chisel blade

For brush and thin tree trunks and new growth. Not available in some countries due to local regulation

Model No.	Blade						Protection guard			
	Blade dia.	Item	Arbor size	Thickness	Part No.	RSP (RM)	Item	Pipe size	Part No.	RSP (RM)
UR012G	225 mm		25.4	1.8 mm	199872-9	169.50		28 mm	199873-7	149.10

Shredder blade


Model No.	Blade						Protection guard			
	Blade dia.	Item	Arbor size	Thickness	Part No.	RSP (RM)	Item	Pipe size	Part No.	RSP (RM)
UR012G	270 mm		25.4 mm	3.9 mm	199874-5	195.90		28 mm	199875-3	114.60

Edger blade



Blade dia. / No. of teeth	Thickness	Model No.	Part No.	RSP (RM)
203 mm / 2	2.5 mm	EE400MP	196745-7	50.70

Rotary scissors

Model No.	Blade				Protection Guard				
	Blade dia.	Item	Part No.	RSP (RM)	Item	Description	Pipe size	Part No.	RSP (RM)
EM407MP	230 mm		A : SY00146013	151.50		Without protector clamp	24 mm	412999-1	49.20
			B : SY00146014	137.90					

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Grass trimmer plastic blade

Grass trimmer plastic blade						Replacement plastic blade			
Still photo	Name	Related models	Thread	Part No.	RSP (RM)	Still photo	per pkg.	Part No.	RSP (RM)
	Plastic blade 230 set ME	UR100D	M8x1.25RH	198848-3	105.10		5	198850-6	30.80
								198851-4	32.20
	Plastic blade 230 set MG	DUR189, DUR194, DUR368A, DUR368L, UR003G	M10x1.25LH	191Y45-0	105.00		12	198426-9	75.00
	Plastic blade 255 set ME	DUR189, DUR190L, DUR191L, DUR368A, DUR368L, DUR369A, DUR369L, DUX60, UR003G, UR007G, UR008G, UR017G, UR201C	M8x1.25RH M8x1.25LH M10x1.25LH	198383-1	130.20				

String trimmer head

Eyelet 2 pcs/ set for Bump & Feed 4L/ 4R/ Z5L, Ultra Auto 4R/ 4L6L Part No. A-15992

Description	Ref.	Size	Thread size	Model No.	Cord/ Line	Part No.	RSP (RM)
	96-M8R	4"	M8 x 1.25RH	DUR189	2.0 mm x 4 m	191D92-5	108.60
	96-M8L	4"	M8 x 1.25LH	DUR187L	2.0 mm x 4 m	191D91-7	108.60
	96-M10L	4"	M10 x 1.25LH	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, DUR368A, DUR368L, DUR369A, DUR369L, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP, EM408MP, EM409MP	2.0 mm x 4 m	191D89-4	108.60
					2.4 mm x 3 m	191D90-9	108.60
	121-M10L	5"	M10 x 1.25LH	UR008G, UR012G	2.4 mm x 4m	191D93-3	156.00
Bump & Feed 	UN-74L	4.4"	M10 x 1.25LH	DUR190L, DUR368A, DUR368L, DUR369A, DUR369L, UR002G, UR003G, UR101C, UR201C, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4 mm x 3.6 m	196324-1	104.30
Bump & Feed 	UN-74L	4.4"	M10 x 1.25LH	BBC231U, BBC300L, BC231UD, BC300LD, EM400MP, EM401MP, BUX361, EBH252U, EBH253U, EM2650UH/LH, EM2651UH/LH, EM2652LH, EM2511LH, EM2510LH, EM2653LH, EM2654LH	2.4 mm x 2 m	195149-0	145.00
Bump & Feed 	76-M8R	3"	M8 x 1.25RH	UR100D	1.65 mm x 8 m	198853-0	112.80
	95-M8L	4"	M8 x 1.25LH	DUR187L, DUR188L, EM2500U/L, EM2600U/L	2.0 mm x 3 m	198386-5	69.10
Bump & Feed 	Bump & Feed ECO 4R	4" Low Profile	M8 x 1.25RH	DUR189	2.0 mm x 3 m	197297-1	84.60
	Bump & Feed ECO 4L	4" Low Profile	M8 x 1.25LH	DUR187L	2.0 mm x 3 m	196589-5	75.90
	Bump & Feed ECO 4L	4" Low Profile	M10 x 1.25LH	DUR192L, DUR368A, DUR368L, DUR369A, DUR369L, UR003G, UR007G, UR008G, UR201C, EM408MP, EM409MP	2.0 mm x 3 m	197296-3	131.30
	Bump & Feed Z5L/ 105-M10L	5"	M10 x 1.25LH	EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4 mm x 3 m	B-05131	159.30
				UR012G	2.7 mm x 3 m	199884-2	166.00

Spool assembly



Model No.	Part No.	RSP (RM)
UR3000	DA00000001	30.00
DUR181	195858-1	25.60
DUR193	191Y39-5	27.60

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling
Stirring
Hammer Drilling / Chiselling
Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory

Thakita

Accessory

Harness

Still photo	Name	Related models	Type	Part no.	RSP (RM)
	Band assembly	DUN500W, DUN501W, DUR181, DUR189, DUR190L, DUR191L, DUR368A, DUR368L, DUX60, UR100D	Single	125516-5	13.80
	Band assembly	DUR189, DUR190L, DUR191L, DUR192L, DUR193, DUR194, DUR368L, DUR369L, DUX18, DUX60, UR003G	Single	127508-0	16.30
	Band assembly	DUA200, UN001G, UR016G, UR017G	Single	122D94-0	26.20
	Band assembly	DUR369A, UR007G	Comfort	122906-3	85.10
	Band assembly set	DUA300, DUA301, UA003G, UA004G	Comfort	191K37-5	115.00
	Sholder harness assy	DUB187	Single	GB00000198	22.40

Four-Leaf spiral nylon cord

Type	Model No.	Dia. (mm)	Length (m)	Part No.	RSP (RM)
	Single	1.65	15	E-01731	24.00
				198860-5	TBA
	Single	2.0	15	E-01769	25.90
	Single	2.4	15	198501-1	86.00

Other nylon cord (round, natural)

	Size	Part No.	RSP (RM)
	1.65 mm x 15 m	DA000000003	24.00
	1.65 mm x 15 m	196148-5	25.00
	2.4 mm x 5 m	B-01971	16.20

Multi tool attachments

Model	Item	Recommended power unit models	Part No.	RSP (RM)	
EM403MP	 Brushcutter Cutting width: 450 mm (String trimmer head) 230mm (Brush cutter blade size) Spindle size: M10 x 1.25LH Arbor size: 25.4 mm Gear ratio EM403MP: 0.74 (14:19) High speed type	DUX60, UX01G	198760-7	707.10	Screwing / Drilling
EM407MP	 Rotary scissors attach Set Cutting width: 230 mm Stone & grass antiscattering brushcutter attachment.	DUX18, DUX60, UX01G	191M57-1	4130.00	Hammer Drilling / Chiselling
	 Replacement blade		SY00146013	151.50	Grinding / Sanding / Polishing
	 Replacement blade		SY00146014	137.90	
EM408MP	 Brushcutter Cutting width: 300 mm (String trimmer head) 230mm (Brush cutter blade size) Spindle size: M10 x 1.25LH Arbor size: 25.4mm Gear ratio: 0.74 (14:19)	DUX18, DUX60, UX01G	191N34-9	704.40	Cutting
EM409MP	 Brushcutter (Narrow guard for String trimmer head) Cutting width: 300 mm Spindle size: M10 x 1.25LH Gear ratio: 0.74 (14:19)	DUX18, DUX60, UX01G	191N46-2	618.60	Sawing
ER400MP	 String trimmer attachment Cutting width: 410 mm Spindle size: M8 x 1.25RH	DUX18, DUX60, UX01G	196073-0	397.50	Milling / Planing
EN424MP	 Ground trimmer Effective cutting length: 330 mm	DUX18, DUX60, UX01G	1913D1-6	1317.30	Fastening / Fixing
	 Shear blade 330 set		1912V6-6	615.30	Cleaning
WA400MP	 Standard equipment: Weeding blade 220 set, blade cover assembly, cap, hex wrench	UX01G, DUX60, DUX18	1913T9-2	1,948.60	Lawn Care / Grass Care
	 Weeding blade 220 set Weeding operation in large areas Working width: 220 mm Working depth: 35 mm		1913L5-4	161.10	Tree Care / Hedge Care
	 Weeding blade 80 set Weeding operation in tight areas Working width: 80 mm Working depth: 50 mm		1913L6-2	157.00	
	 Cultivator blade 170 set Weeding operation while deeply digging into the soil Working width: 170 mm Working depth: 50 mm *with Blade cover assembly		1913L7-0	175.90	Transportation
UB400MP	 Blower Max. Air volume: 16.6 m³/min (UX01G)	DUX18, DUX60, UX01G	191F68-4	1,198.20	Lights
UB401MP	 Blower Max. Air volume: 16.4 m³/min (UX01G)	DUX18, DUX60, UX01G	191P75-7	1,190.00	Comfort / Lifestyle
UB402MP	 Blower Max. Air volume: 6.2 m³/min (UX01G)	DUX18, DUX60, UX01G	1912R9-2	449.50	Specialty Tools
EY403MP	 Pole saw Guide bar length: 30 cm (12") Saw chain: 90PX-46links or 91PX-46links Motor Mount: A41	DUX18, DUX60, UX01G	191T41-8	1,117.00	Accessory
EN401MP	 Pole hedge trimmer angle adjustment Effective cutting length: 490 mm	DUX18, DUX60, UX01G	196341-1	1,949.10	


*All recommended selling price (RSP) shown are for reference only (exclude SST).

Accessory

	Model	Item	Recommended power unit models	Part No.	RSP (RM)
Screwing / Drilling	EN402MP 	Pole hedge trimmer Effective cutting length: 500 mm	DUX18, DUX60, UX01G	1912U0-1	1,224.60
Stringing		Shear blade 500 set 		1912G3-7	524.60
Hammer Drilling / Chiselling	EN410MP 	Pole hedge trimmer straight Effective cutting length: 490 mm	DUX18, DUX60, UX01G	197742-6	1,042.60
Grinding / Sanding / Polishing	EN420MP 	Ground trimmer Effective cutting length: 250 mm	DUX18, DUX60, UX01G	198061-3	1,904.40
Cutting		Shear blade 250 set 		198195-2	266.20
Sawing	KR400MP 	Cultivator Cultivating width: 160 mm	DUX18, DUX60, UX01G	195716-1	1,840.80
Milling / Planing	KR401MP 	Cultivator Cultivating width: 220 mm * Rotor LR set: Part No: 199204-0		195707-2	1,840.80
Fastening / Fixing	BR400MP 	Power brush Working width: 600 mm * Brush wheel (1pc) Part No: XNR0000548	DUX18, DUX60, UX01G	199323-2	2,833.50
Cleaning		Brush wheel 		XNR0000548	504.70
Lawn Care / Grass Care	SW400MP 	Power sweep Working width: 590 mm * Sweeper wheel (1pc) Part No: XNR0000549	DUX18, DUX60, UX01G	199344-4	2,826.40
Tree Care / Hedge Care		Sweeper wheel 		XNR0000549	461.10
Transportation	EJ400MP 	Coffee harvester	DUX18, DUX60, UX01G	197163-2	3,000.40
Lights	EE400MP 	Edger attachment Blade size diameter: 203 mm Hole diameter: 25.4 mm	DUX18, DUX60, UX01G	196752-0	1,003.70
Comfort / Lifestyle		Replacement blade 		196745-7	50.70
Specialty Tools	PF400MP 	Pump Attachment Hose size (Inner diameter) : 25 mm / 1" DUX18 : Max. lift height: 11 m Max, flow rate: 120 l/min DUX60 : Max. lift height: 14 m Max, flow rate: 145 l/min UX01G : Max. lift height: 15 m Max, flow rate: 150 l/min	DUX18, DUX60, UX01G	PF400MP	1,511.30
	LE400MP 	Shaft extension attachment 1.08 m (42-1/2") For Pole saw, Pole hedge trimmer and Coffee harvester	DUX18, DUX60, UX01G	191E23-0	601.90

* All recommended selling price (RSP) shown are for reference only (exclude SST).

Saw Chain and Guide Bar

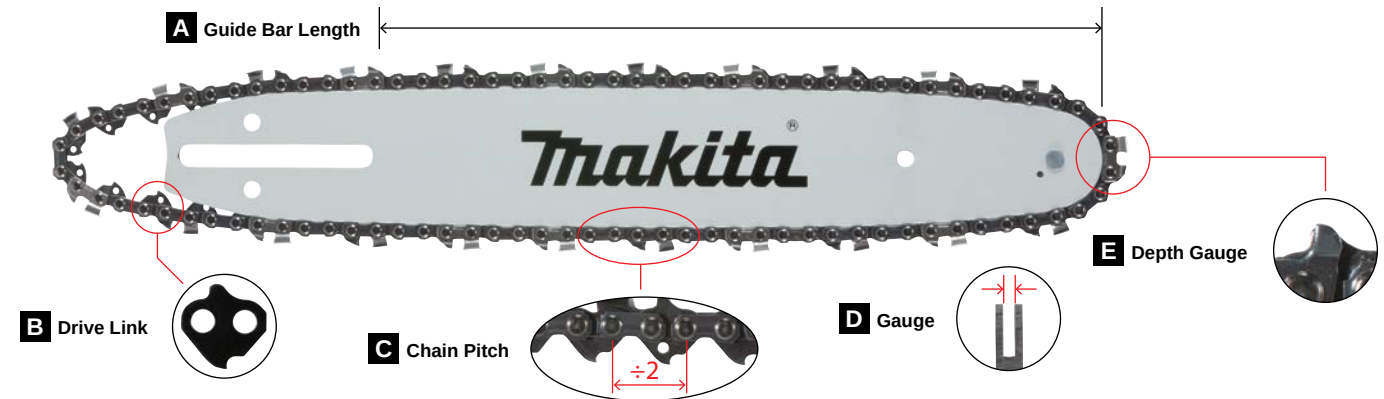


A Guide Bar Length

Guide bar's length is represented by cutting length, which is different from its total length.



B Drive Link

The length of saw chain is determined by counting the number of drive links in the saw chain.




C Chain Pitch

Chain pitch is the size of the chain and it is defined by the distance between any three consecutive rivets divided by two. Pitch is important because the drive sprocket must be the same pitch as the chain.



D Gauge

Chain Gauge is thickness of drive link which will fit into the guide bar groove. Chain gauge must be the same as guide bar gauge.



E Depth Gauge

Depth gauge determines how deep the cutting teeth gets into the wood. Cutting depth can be checked by the gap between top of cutter and depth gauge.



General Saw Chain Character

		Cutting speed			
		Fast			Slow
Chain Pitch	Gauge	0.043" (1.1mm)	0.050" (1.3mm)	0.058" (1.5mm)	0.063" (1.6mm)
	Surface condition				
Fine ↑ Coarse ↓	1/4"	25AP 25F			
	.325"LP	80			
	3/8"LP	90PX	91PX 91F 91VXL		
	.325"		20BPX 95VPX	21BPX 21LPX	22BPX 22LPX
	3/8"		72LPX 72V	73DPX 73LGX 73LPX	75LPX 75LPX
	.404"				27X 59AC

Guide Bar Type

Sprocket Nose Bars

Sprocket nose bars have a rotating sprocket mounted at the tip of the bar. As the chain moves along the bar, the sprocket teeth carry the chain around the tip smoothly with less friction.



Hard Nose Bars(Solid Bar)

High wear resistant stellite has been welded onto the tip. Hard nose bars are made for special applications, such as fire-damaged forests, deserts, or sandy environments.



Carving Bars

Carving bars are made of high-quality steel and high wear resistant stellite has been welded onto the tip. Bar tip is designed to have small radius for precision cutting. The carving bars are made for especially pruning and carving.



Guide Bar Maintenance

Chain Tension

Check the chain tension before use. The saw chain may become loose after many hours of use.



File Bar Edge

File bar edge with a flat file to keep it 90° once a week.




Clean Guide Bar

Clean out chips and sawdust every time when you sharpen or replace saw chain.



Bar Nose Grease


Lubricate a whole sprocket regularly so that the saw chain can rotate with less friction.



Sharpening Saw Chain

Round File and File holder



The file can be guided more easily if a file holder is employed. The file holder has markings for the correct sharpening angle of 30° (align the markings parallel to the saw chain) and limits the depth of penetration (to 4/5 of the file diameter).



Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.

Flat file



Accessory

Chain saws

Guide bar/ saw chain/ guide bar cover/ drive sprocket

*Cutter type: CC Chamfer chisel, SC: Semi chisel, MC ; Micro chisel, FC: Full chisel



Guide Bar						Saw Chain								Bar Cover		Drive Sprocket		
Bar length	Motor Mount	Type	Drive tooth	Part No.	RSP (RM)	No. of drive links	Gauge	Pitch	Type	Cutter type	Part No. (Carton)	RSP (RM)	Low kickback saw chain (ANSI / CSA)	Part No.	RSP (RM)	Type	Part No.	RSP (RM)
Pole Saws Model No: DUA200																		
20 cm/ 8"	A041	Sprocket nose bar	-	1914S3-3	95.50	38	1.1 mm/ .043"	.325" LP	80TXL	MC	1914S1-7	115.30	-	413G28-5	15.30	Sprocket 0.325" LP	227947-5	4.70
Pole Saws Model No: *EY402MP, *EY403MP (Pole saw attachment) DUA300, DUA301, UA003G, UA004G																		
30 cm/ 12"	A041	Sprocket nose bar	7	191G15-1	97.70	46	1.1 mm/ .043"	3/8" LP	90PX	CC	191H01-8	106.20	YES	419288-5	26.80	Sprocket 3/8"LP	226992-7	10.20
									413G23-5		21.70							
30 cm/ 12"			7	191G23-2	96.80	46	1.3 mm/ .050"	3/8" LP	91PX		191H10-7	100.40		419288-5	26.80			
										413G23-5	21.70							
Cordless Chain Saws Model No: DUC101, UC100D																		
10 cm/ 4"	F002	without sprocket	-	1910W0-3	111.00	26	1.1 mm/ .043"	.325" LP	80TXL	MC	1910V6-4	80.20	-	413M40-1	TBA	.325"LP	1911W5-9	7.00
Cordless Chain Saws Model No: DUC150, UC029G																		
15 cm/ 6"	F002	without sprocket	-	1912F1-4	88.70	32	1.1 mm/ .043"	.325" LP	80TXL	MC	1912E8-3	141.30	-	413T67-3	TBA	.325"LP	1911W5-9	7.00
Cordless Chain Saws Model No: DUC254																		
25 cm/ 10"	A041	Sprocket nose bar	-	191T85-8	95.30	46	1.1 mm/ .043"	.325" LP	80TXL	MC	191T89-0	135.50	-	452093-7	14.40	Sprocket .325"LP 7 tooth	1911W5-9	7.00
25 cm/ 10"			-	191G14-3	TBA	40		3/8" LP	90PX	CC	191H00-0	94.60	-	452093-7	14.40	Sprocket 3/8"LP 6 tooth	199063-2	TBA
30 cm/ 12"			7	191G15-1	97.70	46					191H01-8	106.20	-	419288-5	26.80			
													413G23-5	21.70				
30 cm/ 12"	-	191G23-2	96.80	46	1.3 mm/ .050"	91PX	191H10-7	100.40	-	419288-5	26.80	413G23-5	21.70					
Cordless Chain Saws Model No: UC022G																		
35 cm/ 14"	A041	Sprocket nose bar	-	191T87-4	109.50	59	1.1 mm/ .043"	.325" LP	80TXL	MC	191T91-3	228.00	-	419288-5	26.80	Sprocket .325"LP"	191V91-5	45.80
													413G23-5	21.70				
40 cm/ 16"			-	191T88-2	122.60	64					191T92-1	246.40	-	419242-9	TBA			
							413G21-9	TBA										
Cordless Chain Saws Model No: DUC356, DUC406																		
25 cm/ 10"	A041	Sprocket nose bar	-	191T85-8	95.30	46	1.1mm/ .043"	.325" LP	80TXL	MC	191T89-0	135.50	YES	452093-7	14.40	Sprocket .325"LP 7 tooth	1911W5-9	7.00
35 cm/ 14"			8	191T87-4	109.50	59					191T91-3	228.00		419288-5	26.80			
														413G23-5	21.70			
40 cm/ 16"	-	191T88-2	122.60	64	191T92-1	246.40	419242-9	TBA										
25 cm/ 10"	A041	Sprocket nose bar	-	191G14-3	TBA	40	1.1mm/ .043"	3/8" LP	90PX	CC	191H00-0	94.60	YES	452093-7	14.40	Sprocket 3/8"LP 6 tooth	199063-2	TBA
30 cm/ 12"			-	191G15-1	97.70	46					191H01-8	106.20		419288-5	26.80			
													413G23-5	21.70				
35 cm/ 14"			-	191G16-9	119.10	52					191H02-6	75.90		419288-5	26.80			
							413G23-5	21.70										
40 cm/ 16"	-	191G17-7	130.40	56	191H03-4	119.90		419242-9	TBA									
30 cm/ 12"	A041	Sprocket nose bar	-	191G23-2	96.80	46	1.3mm/ .050"	3/8" LP	91PX	CC	191H10-7	100.40	YES	419288-5	26.80			
														413G23-5	21.70			
35 cm/ 14"			-	191G24-0	103.50	52					191H11-5	109.90		419288-5	26.80			
														413G23-5	21.70			
40 cm/ 16"			-	191G25-8	109.00	56					191H12-3	122.80		419242-9	TBA			

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Guide Bar						Saw Chain								Bar Cover		Drive Sprocket						
Bar length	Motor Mount	Type	Drive tooth	Part No.	RSP (RM)	No. of drive links	Gauge	Pitch	Type	Cutter type	Part No. (Carton)	RSP (RM)	Low kickback saw chain (ANSI / CSA)	Part No.	RSP (RM)	Type	Part No.	RSP (RM)				
Cordless Chain Saws Model No: DUC307																						
30 cm/ 12"	A041	Sprocket nose bar	-	191G15-1	97.70	46	1.1 mm/ .043"	3/8" LP	90PX	CC	191H01-8	106.20	YES	419288-5	26.80	Sprocket 3/8"LP 6 tooth	199063-2	TBA				
35 cm/ 14"			-	191G16-9	119.10	52					191H02-6	75.90		413G23-5	21.70							
40 cm/ 16"			-	191G17-7	130.40	56					191H03-4	119.90		419288-5	26.80							
30 cm/ 12"			-	191G23-2	96.80	46	1.3 mm/ .050"	3/8" LP	91PX		191H10-7	100.40		413G23-5	21.70							
35 cm/ 14"			-	191G24-0	103.50	52					191H11-5	109.90		419288-5	26.80							
40 cm/ 16"			-	191G25-8	109.00	56					191H12-3	122.80		413G23-5	21.70							
Cordless Chain Saws Model No: DUC353, DUC355																						
30 cm/ 12"	A041	Sprocket nose bar	7	191G15-1	97.70	46	1.1 mm/ .043"	3/8" LP	90PX	CC	191H01-8	106.20	YES	419288-5	26.80	Sprocket 3/8"LP 6 tooth	199063-2	TBA				
35 cm/ 14"			-	191G16-9	119.10	52					191H02-6	75.90		413G23-5	21.70							
40 cm/ 16"			-	191G17-7	130.40	56					191H03-4	119.90		419288-5	26.80							
30 cm/ 12"			7	191G23-2	96.80	46	1.3 mm/ .050"	3/8" LP	91PX	CC	191H10-7	100.40		413G23-5	21.70							
35 cm/ 14"			-	191G24-0	103.50	52					191H11-5	109.90		419288-5	26.80							
40 cm/ 16"			7	191G25-8	109.00	56					191H12-3	122.80		413G23-5	21.70							
Cordless Chain Saws Model No: UC004G																						
25 cm/ 10"	A041	Sprocket nose bar	-	191T85-8	95.30	46	1.1mm/ .043"	.325" LP	80TXL	MC	191T89-0	135.50	YES	452093-7	14.40	Sprocket .325"LP 7 tooth	191V91-5	45.80				
35 cm/ 14"	A041	Sprocket nose bar	-	191T87-4	109.50	59					191T91-3	228.00		419288-5	26.80							
														413G23-5	21.70							
25 cm/ 10"	A041	Sprocket nose bar	-	191G14-3	TBA	40	1.1mm/ .043"	3/8" LP	90PX	CC	191H00-0	94.60		YES	452093-7	14.40	Sprocket 3/8"LP 6 tooth	191V90-7	23.60			
30 cm/ 12"	A041	Sprocket nose bar	-	191G15-1	97.70	46					191H01-8	106.20			419288-5	26.80						
35 cm/ 14"	A041	Sprocket nose bar	-	191G16-9	119.10	52					191H02-6	75.90			413G23-5	21.70						
30 cm/ 12"	A041	Sprocket nose bar	-	191G23-2	96.80	46	1.3mm/ .050"	3/8" LP	91PX	CC	191H10-7	100.40			YES	419288-5				26.80	Sprocket 3/8"LP 6 tooth	191V90-7
35 cm/ 14"	A041	Sprocket nose bar	-	191G24-0	103.50	52					191H11-5	109.90	413G23-5			21.70						
Cordless Chain Saws Model No: UC016G																						
35 cm/ 14"	A041	Sprocket nose bar	-	191T87-4	109.50	59	1.1mm/ .043"	.325" LP	80TXL	MC	191T91-3	228.00	YES	419288-5	26.80	Sprocket .325"LP 7 tooth	191V91-5	45.80				
40 cm/ 16"			-	191T88-2	122.60	56					191T92-1	246.40		413G23-5	21.70							
30 cm/ 12"			-	191G15-1	97.70	46	1.1mm/ .043"	3/8" LP	90PX	CC	191H01-8	106.20		419288-5	26.80				Sprocket 3/8"LP 6 tooth	191V90-7	23.60	
35 cm/ 14"			-	191G16-9	119.10	52					191H02-6	75.90		413G23-5	21.70							
40 cm/ 16"			-	191G17-7	130.40	56					191H03-4	119.90		419288-5	26.80							
30 cm/ 12"			-	191G23-2	96.80	46	1.3mm/ .050"	3/8" LP	91PX	CC	191H10-7	100.40		413G23-5	21.70							
35 cm/ 14"			-	191G24-0	103.50	52					191H11-5	109.90		419288-5	26.80							
40 cm/ 16"			-	191G25-8	109.00	56					191H12-3	122.80		413G23-5	21.70							

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Screwing / Drilling

Stirring

Hammer Drilling / Chiselling

Grinding / Sanding / Polishing

Cutting

Sawing

Milling / Planing

Fastening / Fixing

Cleaning

Lawn Care / Grass Care

Tree Care / Hedge Care

Transportation

Lights

Comfort / Lifestyle

Specialty Tools

Accessory



Accessory

Guide Bar						Saw Chain								Bar Cover		Drive Sprocket		
Bar length	Motor Mount	Type	Drive tooth	Part No.	RSP (RM)	No. of drive links	Gauge	Pitch	Type	Cutter type	Part No. (Carton)	RSP (RM)	Low kickback saw chain (ANSI / CSA)	Part No.	RSP (RM)	Type	Part No.	RSP (RM)
Electric Chain Saws Model No: UC3541A, UC4041A																		
30 cm/ 12"	A041	Sprocket nose bar	-	191G15-1	97.70	46	1.1 mm/ .043"	3/8" LP	90PX	CC	191H01-8	106.20	-	419288-5	26.80	Sprocket 3/8"LP 6 tooth	221526-1	7.20
35 cm/ 14"			-	191G16-9	119.10	52					191H02-6	75.90		413G23-5	21.70			
40 cm/ 16"			-	191G17-7	130.40	56					191H03-4	119.90		419242-9	TBA			
30 cm/ 12"			-	191G23-2	96.80	46	1.3 mm/ .050"	91PX	CC	191H10-7	100.40	419288-5		26.80				
35 cm/ 14"			-	191G24-0	103.50	52				191H11-5	109.90	413G23-5		21.70				
40 cm/ 16"			-	191G25-8	109.00	56				191H12-3	122.80	419288-5		26.80				
												413G23-5		21.70				
												419242-9	TBA					
Electric Chain Saws Model No: UC3551A, UC4051A																		
30 cm/ 12"	A041	Sprocket nose bar	7	191G23-2	96.80	46	1.3 mm/ .050"	3/8" LP	91PX	CC	191H10-7	100.40	YES	419288-5	26.80	Sprocket 3/8"LP 6 tooth	221521-1	TBA
35 cm/ 14"			-	191G24-0	103.50	52					191H11-5	109.90		413G23-5	21.70			
40 cm/ 16"			-	191G25-8	109.00	56					191H12-3	122.80		419242-9	TBA			

File and file holder

For chain saw
*with grip



Saw chain type	Round file				File and File handle and File holder	
	Size	Part No.	Qty	RSP (RM)	Part No.	RSP (RM)
25F, 25AP, 80TXL, 91P, 91PX, 91PXL, 91VXL, M41, M43	4.0 mm 5/32"	*744003-1	1	16.20	-	
		-			D-70948	55.90
					198457-8	74.20
90PX, 90SG	-	-			D-70954	55.90
95VPX/ TXL, 20BPX/ LPX, 21BPX/ LPX, 22BPX/ LPX, 082, 086, 686, 484	-	-			D-70960	55.90
72DPX/ LPX, 73DPX/ LPX, 75DPX/ LPX	-	-			D-70976	55.90
72DPX/ LPX/ APX/ EXL/ EXJ/ LGX/ JGX/ JPY/ RDV, 73DPX/ LPX/ EXL/ EXJ/ LGX/ JGX/ JPY/ RDV, 75DPX/ LPX/ EXL/ EXJ/ LGX/ JGX/ JPY/ RDV, 496, 093, 099	-	-			D-70982	55.90

Flat file, depth gauge

For all saw chain
Depth gauge: .025" / 0.64 mm

Flat file and File handle and Depth gauge	
Part No.	RSP (RM)
D-70998	45.30



Spike bumper

Model	Part No.	RSP (RM)
DUC254	199067-4	11.00



Angled attachment set for pole saw

Chain oil

Item	Size	Part No.	RSP (RM)
With Makita chain oil, chain oiling is formulated to adhere to the bar and chain and to reduce wear. Adhesion additive helps keep sap and pitch from clinging to the bar and chain. (Not available in Austria)	100 ml	182229-1	16.20
		199897-3	20.80
	1 L	195093-1	59.00



Model No.	Part No.	RSP (RM)
UA003G, UA004G, DUA300, DUA301	1910J6-0	323.10

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Hook holder for extension cord



Models	Type	Description	Part No.	RSP (RM)
BO001CG, BO003CG, BO005CG, BO006CG	A	Arm band complete set	194679-8	30.40
DUP361, DUP362	B	Cord holder complete set	194677-2	11.30

Weeding nozzle with cover



Model No.	Part No.	RSP (RM)
DUS054, US053D	AB45127080	158.40

Shear blade & blade cover for grass shear



Model No.	Cutting width	1. Blade Assembly		2. Blade Cover		3. Grass Receiver	
		Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)
DUM604 UM600D	160 mm	195267-4	363.50	452055-5	15.50	457426-1	20.40
UM110D	110 mm	191N23-4	120.40	-	-	454880-0	TBA

Conversion from hedge trimmer to grass shear



Model No.	Cutting width	1. Blade Assembly		2. Blade Cover		3. Clank Cover	
		Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)
UH201D	160 mm	195267-4	363.50	-	-	-	-
	110 mm	191N23-4	120.40	191N25-0	TBA	452198-3	TBA

Conversion from grass shear to hedge trimmer



Model No.	1. Blade Assembly			2. Blade Cover		3. Chip Receiver	
	Surface Treat	Part No.	RSP(RM)	Part No.	RSP(RM)	Part No.	RSP(RM)
DUM111 DUM604 UM600D	NICKEL PLATING	198408-1	138.00	458342-0	21.90	198401-5	35.50

Long attachment handle

Extension Handle kit
*with grass shear blade




Model No.	Part No.	RSP (RM)
DUM604, UM110D, UM600D, *UH201D	198486-1	322.00
	195187-2	381.70

Shear blade & blade cover

Blade type

A: Curving blade

Optimum blade shape for smooth cutting

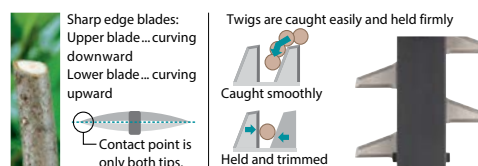

B: High grade blade

Upper/ Lower blade teeth with 3

sharpened edges for clean cut.



C: Stain-free blade

Non-electrolyzed nickel plating

Evenly and strongly adhered surface coating that features high anti-abrasion surface for long lasting coating.

Sap on the blade
(after 10 hour trimming of Boxwood)



Cordless hedge trimmer								
Model No.	Blade size (mm)	Blade type	Blade Assembly		Blade Cover		Chip Receiver	
			Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)
DUH506	500	C	1914G4-7	312.40	413L91-8	19.00	1910T1-0	210.40
DUH507	500	C	1911J1-6	425.90	413L91-8	19.00	1910T1-0	210.40
DUH601	600	A	191R53-9	714.40	412911-1	52.80	191R51-3	252.20
DUH754S	750	A	191Y05-2	769.10	412770-3	TBA	191D34-9	222.60
UH020G	500	-	1914G4-7	312.40	413L91-8	19.00	1910T1-0	210.40
UH004G	600	A	191R53-9	714.40	412911-1	52.80	191R51-3	252.20
UH006G	600	B	191R55-5	764.40	412911-1	52.80	191R51-3	252.20
UH014G	750	A	191Y05-2	769.10	413B99-2	TBA	191D34-9	222.60
UH201D	200	C	198408-1	138.00	458342-0	21.90	198401-5	35.50

Pole Hedge trimmer (Cordless, Petrol, Multi tool attachments) *Attached to Blade assembly							
Model No.	Blade size (mm)	Blade Assembly		Blade Cover		Chip Receiver	
		Part No.	RSP (RM)	Part No.	RSP (RM)	Part No.	RSP (RM)
DUN461W, UN460WD	460	191P00-8	289.90	413720-1	TBA	191T43-4	92.60
DUN500W	500	191C14-9	393.40	458413-3	TBA	-	-
DUN600L	600	191C13-1	449.80	458414-1	TBA	-	-
UN001G	600	1914E7-7	499.70	458414-1	TBA	-	-

Accessory

Hedge trimmer attachment, petrol hedge trimmer & petrol pole hedge trimmer

Model No.	Blade size (mm)	Part Neme	Part No.	RSP (RM)
EN401MP	490	Grease vessel set	197439-7	56.60
		Shear blade	725187-4	134.00
EN420MP	250	Shear blade	725197-1	73.70
		Blade cover	458345-4	23.50
		Shear blade assembly set	198195-2	266.20
EN402MP	500	Shear blade 500 set	1912G3-7	524.60
		Blade cover 500	413R17-6	TBA

Grease vessel set


Description	Size	Part No.	RSP (RM)
For Pole hedge trimmer and Multi tool attachment (Cultivator, Power brush and Power sweep) GREASE NO.0	80 ml	197439-7	56.60
For string trimmer, Brushcutter and Hedge trimmer (GREASE NO.2)	80 ml	199450-5	60.00

Pruning shear blade

Shear blade (U)

Shear blade (L)

Do not re-use Stop Ring E-4 when reassembling, Stop Ring E-4

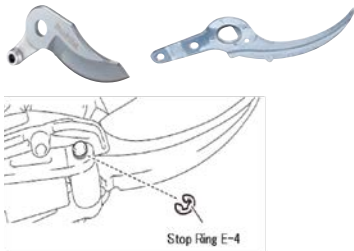

*With Stop Ring E-4 (P/N:961011-9)
**Hex socket button head screw M3x6 P/N:266183 & Shoulder bolt M8 P/N:251573-8 are also necessary

Model No.	Type	*Shear blade (U)		Shear blade (L)	
		Part No.	RSP (RM)	Part No.	RSP (RM)
DUP361	Standard	197366-8	358.00	197749-2	369.90
DUP362				197367-6	328.20
UP100D	Standard	1911W2-5	72.40	1911W1-7	67.80

Backpack mist blower

Model No.	Item	Part No.	RSP (RM)
PM001G	Deflector set	198248-7	TBA
	You can discharge the mist upward or downward		
PM001G PDC1200 UB002C	Sternum strap	196733-4	12.70

Wheelbarrow attachment





*Can be used by attaching to Dump unit installed on Base unit (Wheelbarrow body).

Model No.	Item		Part No.	RSP (RM)
DCU180		Carrier set (Pipe deck)	199116-7	1,262.20
		Pipe frame carrier, Variable-size loading platform Frame size (L x W): 850mm x 660-980mm		
		Bucket set	198494-2	975.50
		Loading platform of dump bucket type Bucket capacity: 90L		
DCU603 DCU604 DCU605		Auxiliary wheel attachment set	191A01-6	776.00
		Dump bucket 200 set	191B69-8	3,493.30
		Loading platform of dump bucket type Bucket capacity: 200L (Heaped capacity)		
		Dump unit set	1914G7-1	TBA
		Damp unit for Pipe frame carrier or Dump bucket 200		
		Carrier set	191B67-2	2,218.00
		Pipe frame carrier, Variable-size loading platform Frame size (L x W): 625-1,015mm x 945-1,090mm		
		Flat bucket set	1911B3-6	4,726.00
		Includes Flat bucket and Flat bucket base. (equipped with a capped nozzle for draining liquid) Bucket capacity: 295L (Heaped capacity)		

Wheelbarrow wheel

Model No.	Item		Part No.	RSP (RM)
DCU601 DCU602 DCU603 DCU604 DCU605		Tire 330 (single) set	1911K4-7	575.10
		For pavement or concrete floor (Tire (13x5.00-6), Tube & Divided type rim set)		
		Gray tire 330 (single) set	1911K5-5	592.60
		For painted floor (Tire (13x5.00-6), Tube & Divided type rim set)		
		Gray tire 210 (single) set	1911K6-3	405.30
		For painted floor (Tire (2.00-4), Tube & Divided type rim with hub bearingset)		


Standard blade

Model No.	Item	Cutting Width (mm)	Part No.	RSP (RM)
DLM330	Blade 330 	330	GB00000042	36.00
DLM382	Blade 380 set 	380	191D41-2	111.90
LM004G	Blade 430 set 	430	1913H4-8	130.40
DLM432	Blade 430 set 	430	191D43-8	70.40
	Blade 430 set 		197761-2	69.00
DLM460	Blade 460 set 	460	199367-2	76.20
DLM462	Blade 460 set 		191D51-9	115.10
DLM480 LM001J	Blade 480 set 	480	191V97-3	120.80
DLM532 DLM533 LM001C LM002G LM004J	Blade 530 set 	530	191D52-7	179.00
	Blade 530 set 		191V96-5	123.80

Collecting grass blade

Model No.	Item	Cutting Width (mm)	Part No.	RSP (RM)
DLM460	Blade 460 set 	460	1910N1-8	TBA
			191W86-4	TBA
DLM532 DLM533 DLM539 LM001C LM002G LM002J LM004J	Blade 530 set 	530	191W87-2	256.40

Mulching blade

Model No.	Item	Cutting Width (mm)	Part No.	RSP (RM)
LM004G	Mulching blade 430 set 	430	1913H6-4	111.90
DLM462 DLM466	Blade 460 set 	460	191Y63-8	TBA
DLM480	Blade 480 set 	480	191Y64-6	191.30
DLM532 DLM533 DLM539 LM001C LM002G LM002J LM004J	Blade 530 set 	530	191Y65-4	202.60

Robotic mower blade

Model No.	Item	Description	Part No.	RSP (RM)
RM350D	Blade set G 	Blade 9pics, Special screw: 9pics set	1913M9-3	156.20

Accessory for robotic mower

Model No.	Item	Description	Part No.	RSP (RM)
RM350D	Wire 150M set G 	For laying the boundary and guide wires. Copper-covered [copper-clad] aluminum 150m	1913N2-4	474.80
	Wire 50M set G 	For laying the boundary and guide wires. Copper-covered [copper-clad] aluminum 50m	1913Y3-9	153.50
	Peg set G 	50 pcs set	1913N6-6	75.30
	Terminal block set G 	5 pcs set	1913N8-2	107.00

Mulching plug set for lawn mower

Model No.	Item	Part No.	RSP (RM)
LM004G	Mulching plug 430 set 	1913H8-0	55.30

Scarifier blade

Model No.	Item	Part No.	RSP (RM)
UV001G	Scarifying blade set 	1913J5-0	462.80
	Dethatching blade set 	1913J7-6	444.00

Machine grease

Model No.	Item	Capacity (g)	Part No.	RSP (RM)
DUH501, DUH502, DUH506, DUH601, DUH602, DUH604S, DUH606, DUH751, DUH752, DUH754S, DUR369A, DUR369L, DUR369N, DUX60, UH004G, UH005G, UH006G, UH007G, UH008G, UH009G, UH013G, UH014G, UN001G, UR006G, UR007G, UR008G, UR016G, UR017G, UR101C, UR201C, UR202C	Grease vessel set 	85	199450-5	60.00

Pump adapter

Model No.	Item	Part No.	RSP (RM)
DMP180 DMP181 MP001G MP100D	French valve adapter 	TE00000334	3.80
		TE00000594	TBA
	Swim ring adapter 	TE00000333	3.50
	Ball adapter 	TE00000592	TBA
DMP180 MP100D	British valve adapter 	TE00000335	3.50
		TE00000597	4.60
		TE00000346	5.00

Accessory

Model No.	Item	Part No	RSP (RM)
DMP181 MP001G	Air chuck 	TE00000796	123.70
		TE00000691	106.60

Filter set

Item	Model No.	Name	TYPE	Part No.	RSP (RM)
	DFV214A DFV215A	Filter set	NON-WOVEN	198642-3	150.20
		Filter (20 pcs)			

Lamp shade

Model	Part No	RSP (RM)
DML809	GM00002286	87.80
DML811	GM00002287	59.80
ML009G	GM00002358	70.80



Anti-glare film

Model	Part No	RSP (RM)
ML005G	GM00002359	41.90



Strap

Model	Part No	RSP (RM)
DML812	GM00002239	12.70
DML817, ML011G, ML107	SE00001178	19.60



Accessory for vacuum pump

Item	Model No.	Name	Part No.	RSP (RM)
	DVP180	Hose packing (6 pcs)	AS000AI158	21.60
		Vacuum gauge 	AS00XP808M	243.40
		Vacuum hose	AS0AI154MK	201.60
-	DVP181	Vacuum pump oil	AS0VP083MK	101.00
	DVP180 DVP181	Adapter	AS0Y06110K	53.10

Flexible shaft set for concrete vibrator VR001G



Size	Part No	RSP (RM)
Ø 32 - 1,200	1910E1-5	1,505.70
Ø 32 - 1,700	1910E2-3	1,579.10
Ø 32 - 2,400	1910C2-9	1,634.20
Ø 38 - 1,200	1910E3-1	1,498.20
Ø 38 - 2,400	1910C4-5	1,586.20

Battery case set for concrete vibrator VR001G



Type	Description	Part No	RSP (RM)
L	for BL4050F, BL4080F	1910J1-0	401.30

Mixing blade

*With Bolt & Nut M8

Item	Mixing Blade			Bolt			Shaft			
	Size (mm)	Part No.	RSP (RM)	Bolt Size	Part No.	RSP (RM)	Bolt size of Power Mixer	Size (mm)	Part No.	RSP (RM)
Model No.: DUT130, UT1305, UT001G										
	130	A-43670	63.70	M8 x 18	265220-5	23.40	M12	L=584 D=12	168349-5	82.20
Model No.: DUT130, UT1305, UT2204, UT001G										
	150	*A-43686	131.70	-	-	-	M12	L=584 D=12	168349-5	82.20
Model No.: DUT130, UT1305, UT001G										
	165	A-43692	71.70	M8 x 18	265220-5	23.40	M12	L=584 D=12	168349-5	82.20
Model No.: UT2204, UT001G										
	220	A-43717	147.10	*M8 x 16	265440-1	2.20	M12	L=584 D=12	A-43773	130.80

Accessory for grease gun DGP180

Variable accessories for increased maneuverability.

Item	Size	Part No	RSP (RM)
Adapter set (1 pc) 	NPT1/8, ~69 Mpa	191W61-0	43.40
Adapter set (3 pcs) 		191A78-1	299.10
Extension pipe set 	NPT1/8, ~69 Mpa Overall length: 160 mm	1911M9-1	70.80
Lock on adapter set 	-	1915N4-2	266.80
Angle adapter set 	~69 Mpa	191A77-3	464.40
Barrel assembly 	A set for 400 g grease cartridge	191B12-7	456.00
Cartridge barrel 	A set for 400 g grease cartridge	191F24-4	415.30
Flexible hose 1200 set 	Length: 1.2 m	191A79-9	513.50
		191W58-9	185.10
Flexible hose 600 set 	Length: 0.6 m	191A80-4	381.00

*All recommended selling price (RSP) shown are for reference only (exclude SST).

Holder for caulking gun CG100D & DCG180

Item	Type	Part No	RSP (RM)
Holder set 300 ml 	A	196351-8	138.70
Holder set 600 ml 	B	1911T4-0	TBA
		196352-6	331.80
Holder set 800 ml 	C	197195-9	269.40
Holder set 400 ml 	D	191P89-6	389.10

Battery adapter & battery converter

Item	Name	Related models	Part No.	RSP (RM)
1.6 m 	Battery adapter set	BO001CG, BO003CG, BO005CG, BO006CG, BO007CG	1914H3-6	198.00
5.0 m 			1914H5-2	241.90
	Interchangeable adapter ADP10 set	Model ADP10 is an interchangeable adapter developed for use with XGT charger to charge LXT Li-Ion batteries.	191C11-5	454.00

Harness for battery adapter

Item	Name	Related models	Part No.	RSP (RM)
	Harness set	BO001CG, BO003CG, BO005CG, BO006CG, BO007CG	1914H8-6	165.90

Cigar socket cable

Item	Name	Related models	Part No.	RSP (RM)
	Cigar lighter dc 12-24V	CW001G, CW003G	WL00000002	53.10

Shoulder strap

Item	Name	Related models	Part No.	RSP (RM)
	Ring set	TW001G	191M83-0	142.60
	Tool catcher set (with strap)	DTW251, DTW300, DTW301, DTW302	197941-0	72.80
	Shoulder belt set	DVC750L	162523-7	22.30
	Shoulder belt (Tool box)	DF333D	161576-3	19.00
	Tool catcher set (with strap)	DTD152, DTD171, DTS141, DTW190, DTW251, DTW253, DTW300, DTW301, DTW302, TW202D	197941-0	72.80

Tool catcher

Still photo	Related models	Part No.	RSP (RM)
	DHR183, HR010G	1911K0-5	26.20
	DTW300, DTW301, DTW302, TW005G	191K57-9	244.60
	DHR182	199593-3	126.80

Heat gun accessories

Model	Shape	Part No	RSP (RM)
DHG181 DHG180 HG5030	Glass protection nozzle 	PR00000028	31.70
	Wide-slot nozzle 	PR00000029	30.40
	Reflector nozzle 	PR00000030	39.00
	Reduction nozzle 20 	PR00000031	32.80
	Overlap welding nozzle 	PR00000032	71.30
	Solder sleeves reflector 	PR00000033	85.30
	Welding nozzle 	PR00000034	30.80
	Pressure roller 	PR00000035	52.20
	Welding rods 	ABS PR00000036	TBA
		HDPE PR00000037	TBA
		PP PR00000038	TBA
HG5030	Speed welding nozzle 	PR00000039	36.20

Accessory

Shear wrench sleeve

For model 6922NB, DWT310, WT001G.



Bolt Size	Outer Sleeve				Inner Sleeve		
	Hex Size	L (mm)	Part No	RSP (RM)	L (mm)	Part No	RSP (RM)
M16	27	35	764362-7	123.20	36	764416-0	325.60
		81	764367-7	392.80	82	764356-2	709.10
		100	764406-3	1,649.70	100	764400-5	2794.80
M20	32	37	764361-9	120.80	38	764417-8	307.90
M22 7/8"	36 1-7/16"	39	153909-6	168.80	39	764418-6	425.90
		85	764364-3	321.60	85	764352-0	587.50
3/4"	1-1/4"	37	764361-9	120.80	-	-	-
5/8"	1-1/16"	35	764362-7	123.20	-	-	-

For model 6924N

Bolt Size	Outer Sleeve				Inner Sleeve		
	Hex Size	L (mm)	Part No	RSP (RM)	L (mm)	Part No	RSP (RM)
M22	36	49	194033-6	321.90	48	194310-6	544.70
M24	41	49	194034-4	288.40	49	194311-4	542.20

Extension handle kit for DTR180 & DTR181

Part No	RSP (RM)
191M27-0	1,113.50



Tie wire set

For model DTR180, DTR181.



Size	Package	Type	Wire length / Bobbin	Part No	RSP (RM)
Ø 0.8 mm	50 pcs/ box	Standard	Approx 100 m	199137-9	1,000.00
		Galvanized	Approx 100 m	191A57-9	1,521.70
		Poly Coated	-	191J59-9	2,169.00

Coffee maker accessories

For model DCM501.

Item	Part No	RSP (RM)
Cup 	KF00000020	40.60

Light stand (tripod)



Model	Description	Height	Set Screw	Part No	RSP (RM)
DML809 DML811 ML003G ML005G ML009G		1,300 - 2,000 mm	-	GM00002378	1,104.40
DML809 DML811 ML003G ML005G	Up to two lights can be mounted 	Flat bar	M10 bolt & nut	GM00002379	221.70

Magnet attachment




Model	Part No	RSP (RM)
ML105, ML104	GM00001714	96.40

Battery adapter & battery converter

Type	Battery Type	For Model	Part No	RSP (RM)
PDC01 	LXT 18V Battery x4	LXT 18V Model	191A62-6	5,014.40
		LXT 18V x2 Model Direct connection 36V Model	191A67-6	4,367.30
BAP001G 	XGT 40Vmax	XGT 40Vmax	1913E8-9	607.10
BAP182 	LXT 18V Batteryx2	LXT 18V x2 Model	197581-4	1,109.10
BAP18C 	LXT 18V Batteryx2	LXT 18Vx2 Model *Specially for cleaner use	191M50-5	319.90

Battery adapter

Item	Model	Part No	RSP (RM)
40Vmax Adapter Set 	PDC01 PDC1200 PDC1500	191N62-4	1,079.00
18V x2 Adapter Set 	PDC01 PDC1200 PDC1500	191J51-5	1,119.50
18V Adapter Set 	PDC01	191A53-7	TBA

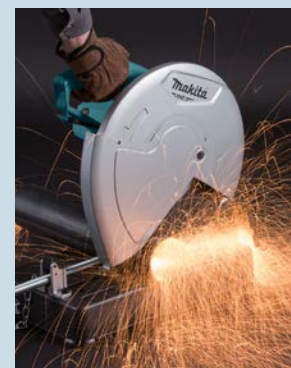
Screwing /
Drilling

Stirring

Hammer
Drilling /
Chiselling

Grinding /
Sanding /
Polishing

Cutting

Sawing

Milling /
Planing

Fastening /
Fixing

Cleaning

Lawn Care /
Grass Care

Tree Care /
Hedge Care

Transportation

Lights

Comfort /
Lifestyle

Specialty
Tools

Accessory

M6501B 6.5 mm (1/4")

RM 243

85

High Speed Drill

• Ideal for drilling smaller holes in wood & steel.


Standard Equipment:
Chuck Key


Continuous Rating Input	230 W
Capacity	Steel: 6.5 mm (1/4") Wood: 9 mm (11/32")
No Load Speed (RPM)	0 - 4,500
Dimensions (L x W x H)	203 x 63 x 171 mm (8 x 2-1/2 x 6-3/4")
Net Weight	0.95 kg (2.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M6000B 10 mm (3/8")

RM 203

64

Drill

• Powerful 350 W motor for continuous operation.


Standard Equipment:
Chuck Key, Chuck Key Holder


Continuous Rating Input	350 W
Capacity	Steel: 10 mm (3/8") Wood: 20 mm (13/16")
No Load Speed (RPM)	0 - 3,000
Dimensions (L x W x H)	230 x 66 x 176 mm (9 x 2-5/8 x 6-15/16")
Net Weight	1.2 kg (2.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M6001B 10 mm (3/8")

RM 221

85

Drill

• Powerful 450 W motor for continuous operation.


Standard Equipment:
Chuck Key


Continuous Rating Input	450 W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	0 - 3,000
Dimensions (L x W x H)	229 x 64 x 175 mm (9 x 2-1/2 x 6-7/8")
Net Weight	1.3 kg (2.9 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M6200B 13 mm (1/2")

RM 442

303

Drill

• Powerful 800 W motor with variable speed for improved mixing and drilling performance.


Standard Equipment:
Chuck Key, Top Grip


Continuous Rating Input	800 W
Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	0 - 700
Dimensions (L x W x H)	267 x 86 x 388 mm (10-1/2 x 3-3/8 x 15-1/4")
Net Weight	2.7 kg (6.0 lbs)
Power Supply Cord	2.0 m (6.6 ft)


M6600XB

RM 600

303

Mixer

• Powerful 800 W motor for improved mixing and drilling performance.


Standard Equipment:
Mixing Blade, Shaft,
Top Grip, Wrenches


Continuous Rating Input	800 W
Blade Diameter	165 mm (6-1/2")
No Load Speed (RPM)	0 - 700
Dimensions (L x W x H)	280 x 86 x 388 mm (11 x 3-3/8 x 15-1/4")
Net Weight	2.6 kg (5.7 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M8701X3B

RM 750

459

Combination Hammer


Standard Equipment:
Side Grip, Depth Gauge, Drill Chuck, SDS-Plus
Chisel Assortment 3pcs Set (D-30134)


Continuous Rating Input	800 W
Impact Energy	EPTA-Procedure 05/2009: 2.3 J
Capacity	Concrete : 26 mm (1") Core Bit: 6.8 mm (2-11/16") Diamond Core Bit (Dry Type): 80 mm (3-1/8") Steel: 13 mm (1/2") Wood : 32 mm (1-1/4")
Impacts per minute (ipm)	0 - 4,500
No Load Speed (RPM)	0 - 1,200
Dimensions (L x W x H)	362 x 71 x 194 mm (14-1/4 x 2-13/16 x 7-5/8")
Net Weight	2.7 kg (6.0 lbs)
Power Supply Cord	4.0 m (13.1 ft)

M8600B 17 mm (11/16") Hex Shank

RM 1,062

105

Demolition Hammer

• Satisfactory chipping performance.


Standard Equipment:
Bull Point, Side Grip


Continuous Rating Input	900 W
Impact Energy	7.2 J
Impacts Per Minute (IPM)	2,900
Dimensions (L x W x H)	406 x 99 x 232 mm (16 x 3-7/8 x 9-1/8")
Net Weight	5.4 kg (12 lbs)
Power Supply Cord	2.5 m (8.2 ft)

M8103B 13 mm (1/2")

RM 281

85

Hammer Drill


Standard Equipment:
Chuck Key, Side Grip,
Chuck Key Holder


Continuous Rating Input	430 W
Capacity	Concrete 13 mm (1/2") Steel 13 mm (1/2") Wood 18 mm (11/16")
Impacts Per Minute (IPM)	0 - 33,000
No Load Speed (RPM)	0 - 3,000
Dimensions (L x W x H)	255 x 72 x 193 mm (10 x 2-13/16 x 7-5/8")
Net Weight	1.8 kg (3.9 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M0801B 16 mm (5/8")
RM 254

85

Hammer Drill

• 2-mode operation for hammering with rotation or rotation only.



Standard Equipment:
Chuck Key, Side Grip



Continuous Rating Input	500 W
Capacity	Concrete 16 mm (5/8") Steel 13 mm (1/2") Wood 20 mm (13/16")
Impacts Per Minute (IPM)	0 - 48,000
No Load Speed (RPM)	0 - 3,200
Dimensions (L x W x H)	261 x 69 x 195 mm (10-1/4 x 2-3/4 x 7-5/8")
Net Weight	1.7 kg (3.7 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M0900B | **M0910B** 100 mm (4")
RM 195 | RM 200

459

Angle Grinder

• High performance and durability.

M0900B

Top Slide Switch

4"



Standard Equipment:
Lock Nut Wrench



Continuous Rating Input	540 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	M0900B 251 x 118 x 97 mm (9-7/8 x 4-5/8 x 3-13/16") M0910B 251 x 118 x 93 mm (9-7/8 x 4-5/8 x 3-5/8")
Net Weight	1.6 kg (3.5 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9509B | **M9513B** 100 mm (4")
RM 289 | RM 284

325

Angle Grinder

• Powerful 850 W motor for the most demanding applications.

M9509B

Slide Switch

4"



Standard Equipment:
M9509B: Side Grip, Lock Nut Wrench
M9513B: Side Grip



Continuous Rating Input	850 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	M9509B 276 x 118 x 101 mm (10-7/8 x 4-5/8 x 4") M9513B 273 x 118 x 101 mm (10-3/4 x 4-5/8 x 4")
Net Weight	1.8 kg (3.9 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9000B 180 mm (7")
RM 610

204

Angle Grinder

• Powerful 2,000 W motor for the most demanding applications.

7"



Standard Equipment:
Side Grip, Lock Nut Wrench



Continuous Rating Input	2,000 W
Wheel Diameter	180 mm (7")
No Load Speed (RPM)	8,500
Dimensions (L x W x H)	466 x 200 x 138 mm (18-3/8 x 7-7/8 x 5-7/16")
Net Weight	5.4 kg (12.0 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9200B
RM 237

419

Finishing Sander

• 14,000 OPM for fast and smooth finish sanding.



Standard Equipment:
Abrasive paper



Continuous Rating Input	180 W
Pad Size	112 x 102 mm (4-3/8" x 4")
Abrasive Paper Size	114 x 140 mm (4-1/2 x 5-1/2")
Orbits Per Minute (OPM)	14,000
Dimensions (L x W x H)	110 x 112 x 133 mm (4-5/16 x 4-3/8 x 5-1/4")
Net Weight	0.9 kg (2 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M8100B 16 mm (5/8")
RM 342

85

Hammer Drill

Standard Equipment:
Side Grip, Chuck Key,
Depth Gauge



Continuous Rating Input	710 W
Capacity	Concrete 16 mm (5/8") Steel 13 mm (1/2") Wood 30 mm (1-3/16")
Impacts Per Minute (IPM)	0 - 48,000
No Load Speed (RPM)	0 - 3,200
Dimensions (L x W x H)	296 x 77 x 202 mm (11-5/8 x 3 x 8")
Net Weight	2.1 kg (4.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9506B | **M9512B** 100 mm (4")
RM 268 | RM 262

459

Angle Grinder

• Powerful 720 W motor for the most demanding applications.

M9506B

Slide Switch

4"



Standard Equipment:
Side Grip, Lock Nut Wrench



Continuous Rating Input	720 W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	M9506B 261 x 118 x 101 mm (10-1/4 x 4-5/8 x 4") M9512B 258 x 118 x 101 mm (10-1/8 x 4-5/8 x 4")
Net Weight	1.6 kg (3.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9002B 125 mm (5")
RM 379

303

Angle Grinder

• High performance and durability.

5"



Standard Equipment:
Side Grip, Lock Nut Wrench



Continuous Rating Input	1,050 W
Wheel Diameter	125 mm (5")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	361 x 140 x 124 mm (14-1/4 x 5-1/2 x 4-7/8")
Net Weight	2.8 kg (6.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9202B
RM 342

419

Random Orbit Sander

• Rocker on/off switch for efficient operation.



Standard Equipment:
Abrasive Paper



Continuous Rating Input	240 W
Pad Size	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.8 mm (1/8")
Dimensions (L x W x H)	127 x 123 x 142 mm (5 x 4-7/8 x 5-5/8")
Net Weight	1.1 kg (2.4 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9201B
RM 270

64

Finishing Sander

• Compact and lightweight body for better handling.



Standard Equipment:
Abrasive Paper



Continuous Rating input	180 W
Pad Size	93 x 185 mm (3-5/8 x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8 x 9")
Orbits Per Minute (OPM)	12,000
Dimensions (L x W x H)	214 x 92 x 147 mm (8-3/8 x 3-5/8 x 5-3/4")
Net Weight	1.4 kg (3.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9204B 125 mm (5")

RM 379

419

Random Orbit Sander

- Available with dust bag and also connectable to vacuum cleaners without adapter.



Standard Equipment:
Dust Bag, Abrasive Paper



Continuous Rating Input	240 W
Pad Size	123 mm (4-7/8")
Abrasive Paper Size	125 mm (5")
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.8 mm (1/8")
Dimensions (L x W x H)	153 x 123 x 144 mm (6 x 4-7/8 x 5-5/8")
Net Weight	1.2 kg (2.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M9400B 100 mm (4")

RM 904

153

Belt Sander

- Powerful 940 W motor for faster material removal.



Standard Equipment:
Abrasive Belt, Dust Bag (1233280),
Carbon Plate, Step



Continuous Rating Input	940 W
Belt Size	100 x 610 mm (4 x 24")
Belt Speed	380 m/min (1,250 ft/min)
Dimensions (L x W x H)	354 x 175 x 169 mm (14 x 6-7/8 x 6-5/8")
Net Weight	6.2 kg (13.7 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M0400B 110 mm (4-3/8")

RM 332

303

Cutter

- Powerful 1,200 W motor.



Standard Equipment:
Wrench, Hex Wrench



Continuous Rating Input	1,200 W
Blade Diameter	110 mm (4-3/8")
Max Cutting Capacity	90°: 32 mm (1-1/4")
No Load Speed (RPM)	13,800
Dimensions (L x W x H)	224 x 195 x 164 mm (8-7/8 x 7-5/8 x 6-1/2")
Net Weight	2.5 kg (5.6 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M4100B 110 mm (4-3/8")

RM 401

303

Cutter

- Compact and lightweight for reduced operator fatigue.



Standard Equipment:
Wrench, Hex Wrench, Water Supply Set



Continuous Rating Input	1,200 W
Blade Diameter	110 mm (4-3/8")
Max Cutting Capacity	90°: 32 mm (1-1/4")
No Load Speed (RPM)	13,000
Dimensions (L x W x H)	227 x 209 x 166 mm (8-15/16 x 8-1/4 x 6-1/2")
Net Weight	2.9 kg (6.4 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M2401B 355 mm (14")

RM 820

203

Portable Cut-off

- Large cutting capacity; Cuts up to 127mm (5") round and 102mm (4") x 194mm (7-5/8") rectangular.



Standard Equipment:
Abrasive Cut-Off Wheel, Hex Wrench



Continuous Rating Input	2,000 W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Dimensions (L x W x H)	500 x 280 x 620 mm (19-3/4 x 11 x 24-3/8")
Net Weight	13.7 kg (30.2 lbs)
Power Supply Cord	2.5 m (8.2 ft)

M2403B 355 mm (14")

RM 846

203

Portable Cut-off

- High performance and durability at less expense.



Standard Equipment:
Cut-Off Wheel, Hex Wrench



Continuous Rating Input	2,200 W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,900
Dimensions (L x W x H)	515 x 280 x 640 mm (20-1/4 x 11 x 25-1/4")
Net Weight	13.8 - 15.3 kg (30.4 - 33.7 lbs)
Power Supply Cord	2.5 m (8.2 ft)

M9800B

RM 442

459

Multi Tool

- Lightweight design.



Standard Equipment:
Hex Wrench



Oscillations Per Minute (OPM)	15,000 - 22,000
Oscillation Angle	Left 1.6° Right 1.6° Total 3.2°
Dimensions (L x W x H)	283 x 68 x 98 mm (11-1/8 x 2-11/16 x 3-7/8")
Net Weight	1.2 - 1.3 kg (2.7 - 3.0 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M5801B 185 mm (7-1/4")

RM 506

303

Circular Saw

- High performance and durability.



Standard Equipment:
TCT Saw Blade, Guide Rule, Hex Wrench



Continuous Rating Input	1,050 W
Blade Diameter	185 mm (7-1/4")
Max Cutting Capacity	90°: 66 mm (2-5/8") 45°: 44 mm (1-3/4")
No Load Speed (RPM)	4,900
Dimensions (L x W x H)	284 x 231 x 243 mm (11-1/8 x 9-1/8 x 9-9/16")
Net Weight	3.7 kg (8.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M2300B 255 mm (10")

RM 1,293

JM23000123

Compound Miter Saw

- Powerful 1,500 W motor.



Standard Equipment:
Wrench, Dust Bag, Triangular Rule,
Vise Assembly, Set Plate, Vercicle Vise



Continuous Rating Input	1,500 W
Miter Angle	45° L / 45° R
Bevel Angle	45° L
Max Cutting Capacity	90° Miter: 75 x 130 mm (2-15/16 x 5-1/8") 45° Miter, L/R: 75 x 90 mm (2-15/16 x 3-9/16")
No Load Speed (RPM)	4,200
Dimensions (L x W x H)	610 x 485 x 515 mm (24 x 19-1/8 x 20-1/4")
Net Weight	14.7 kg (32.5 lbs)
Power Supply Cord	2.5 m (8.2 ft)

M4301B

RM 331

64

Jig Saw

- Powerful 450 W motor.



Standard Equipment:
Jig Saw Blade (B-10), Hex Wrench



Continuous Rating Input	450 W
Max Cutting Capacity	at 90° Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	0 - 3,100
Dimensions (L x W x H)	214 x 75 x 202 mm (8-3/8 x 2-15/16 x 8")
Net Weight	1.9 kg (4.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M4302B

RM 695

411

Jig Saw

- *Heavy duty aluminum gear housing for increased durability.*



Standard Equipment:

2x Jig Saw Blade (B-13 & No. 51), Hex Wrench



Continuous Rating Input	450 W
Max Cutting Capacity at 90°	Wood: 55 mm (2-3/16") Steel: 6 mm (1/4")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	0 - 3,100
Dimensions (L x W x H)	219 x 85 x 191 mm (8-5/8 x 3-3/8 x 7-1/2")
Net Weight	2.5 kg (5.5 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M3700B 6 mm (1/4")

RM 310

411

Trimmer

- *Compact and lightweight body for better handling.*



Standard Equipment:

Trimmer Guide, Straight Guide, Templet Guide, Straight Bit, Chip Deflector, Wrench



Continuous Rating Input	530 W
Collet Capacity	6 mm or 1/4"
Plunge Capacity	0 - 42 mm (0 - 1-5/8")
No Load Speed (RPM)	35,000
Dimensions (L x W x H)	82 x 90 x 199 mm (3-1/4 x 3-1/2 x 7-7/8")
Net Weight	1.4 kg (3.1 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M3702B 6 mm (1/4")

RM 389

411

Trimmer

- *Super smooth rack-and-pinion depth adjustment.*



Standard Equipment:

Collet Cone, Wrench, Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector



Continuous Rating Input	530 W
Collet Capacity	6 mm or 1/4"
Plunge Capacity	0 - 42 mm (0 - 1-5/8")
No Load Speed (RPM)	35,000
Dimensions (L x W x H)	82 x 90 x 211 mm (3-1/4 x 3-1/2 x 8-5/16")
Net Weight	1.5 kg (3.3 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M3601B 6 mm (1/4"), 8 mm (3/8")

RM 589

106

Router

- *Powerful 900 W motor.*



Standard Equipment:

Straight Guide, Straight Bit (733238-9), Wrench



Continuous Rating Input	900 W
Collet Capacity	6 mm (1/4") 8 mm (3/8")
Plunge Capacity	0 - 35 mm (0 - 1-3/8")
No Load Speed (RPM)	27,000
Dimensions (L x W x H)	256 x 110 x 218 mm (10-1/8 x 4-5/16 x 8-5/8")
Net Weight	2.7 kg (6.0 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M4000B

RM 284

85

Blower

- *Compact and lightweight increased operator comfort.*



Standard Equipment:

Nozzle Assembly, Sash Nozzle



Continuous Rating Input	530 W
Air Volume	1.2-2.9 m³/min
No Load Speed (RPM)	8,500 - 16,000
Dimensions (L x W x H)	427 x 161 x 212 mm (16-3/4 x 6-3/8 x 8-3/8")
Net Weight	1.5 kg (3.4 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M4501B

RM 578

303

Recipro Saw

- *Powerful 1,010 W motor for improved performance.*



Continuous Rating Input	1,010 W
Length of Stroke	28 mm (1-1/8")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Dimensions (L x W x H)	457 x 98 x 170 mm (18 x 3-7/8 x 6-11/16")
Net Weight	3.2 kg (7 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M3701B 6 mm (1/4")

RM 315

411

Trimmer

- *Aluminium housing for higher durability.*



Standard Equipment:

Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit (733238A9), Chip Deflector, Wrench

Continuous Rating Input	530 W
Collet Capacity	6 mm or 1/4"
Plunge Capacity	0 - 42 mm (0 - 1-5/8")
No Load Speed (RPM)	35,000
Dimensions (L x W x H)	82 x 90 x 199 mm (3-1/4 x 3-1/2 x 7-7/8")
Net Weight	1.6 kg (3.4 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M3600B 12 mm (1/2")

RM 831

203

Router

- *Conveniently located plunge lock lever for efficient operation.*



Standard Equipment:

Straight Guide, Templet Guide, Guide Holder, Collet Sleeve, Straight Bit, Wrench



Continuous Rating Input	1,650 W
Collet Capacity	12 mm (1/2")
Plunge Capacity	0 - 60 mm (0 - 2-3/8")
No Load Speed (RPM)	22,000
Dimensions (L x W x H)	284 x 148 x 300 mm (11-1/8 x 5-7/8 x 11-3/4")
Net Weight	5.5 kg (12.2 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M1902B 82 mm (3-1/4")

RM 382

411

Planer

- *High performance and durability.*



Standard Equipment:

Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Guide Rule



Continuous Rating Input	580 W
Planing Width	82 mm (3-1/4")
Planing Depth	1 mm (1/32")
No Load Speed (RPM)	16,000
Dimensions (L x W x H)	285 x 157 x 160 mm (11-1/4 x 6-3/16 x 6-5/16")
Net Weight	2.8 - 2.9 kg (6.1 - 6.4 lbs)
Power Supply Cord	2.0 m (6.6 ft)

M4001B

RM 432

303

Blower

- *Two tools in one; quickly converts to a vacuum for added versatility.*



Standard Equipment:

Nozzle, Dust Bag



Continuous Rating Input	600 W
Max Air Volume	0 - 4.1 m³/min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed (RPM)	0 - 16,000
Dimensions (L x W x H)	480 x 185 x 178 mm (18-7/8 x 7-1/4 x 7")
Net Weight	1.9 - 2.0 kg (4.3 - 4.5 lbs)
Power Supply Cord	2.0 m (6.6 ft)

Recommended Batteries Chart

★ Recommended ○ Compatible × Not Applicable

Model	8.0 Ah BL4080H	8.0 Ah BL4080F	5.0 Ah BL4050F	4.0 Ah BL4040F	4.0 Ah BL4040	2.5 Ah BL4025	2.0 Ah BL4020
AC001G	×	★	★	★	★	○	○
AS001G	○	○	○	★	★	★	★
BS001G	×	×	★	★	★	★	★
CE001G	★	★	★	★	○	×	×
CE002G	★	★	★	★	○	×	×
CE004G	★	★	★	★	○	×	×
CF003G	×	★	★	★	★	★	★
CL001G	×	×	○	★	★	★	★
CL002G	×	×	○	★	★	★	★
CL003G	×	×	○	★	★	★	★
CL004G	×	×	○	★	★	★	★
CS002G	○	○	★	★	★	★	★
CW003G	×	★	★	★	★	★	★
DA001G	×	★	★	★	★	★	○
DF001G	★	★	★	★	★	★	★
DF002G	○	○	○	★	★	★	★
DG001G	×	★	★	★	★	★	○
DG002G	×	★	★	★	★	★	○
FN001G	○	○	○	○	○	★	★
GA003G	○	○	★	★	★	★	○
GA005G	○	○	★	★	★	★	○
GA011G	○	○	★	★	★	★	○
GA013G	○	○	★	★	★	★	○
GA021G	○	○	★	★	★	★	○
GA023G	○	○	★	★	★	★	○
GA027G	○	○	★	★	★	★	○
GA029G	○	○	★	★	★	★	○
GA035G	○	○	★	★	★	★	○
GA036G	○	○	★	★	★	★	○
GA037G	★	★	★	★	○	○	×
GA038G	★	★	★	★	○	○	×
GA048G	○	○	★	★	★	★	○
GA055G	○	○	★	★	★	★	○
GD001G	○	○	★	★	★	★	★
GD002G	○	○	★	★	★	★	★
GP001G	×	○	○	★	★	★	★
HM001G	○	★	★	★	★	○	○
HM002G	★	★	★	★	★	○	○
HM004G	★	★	★	★	★	○	○
HP001G	★	★	★	★	★	★	★
HP002G	○	○	○	★	★	★	★
HR001G	○	○	○	★	★	★	★
HR002G	○	○	○	★	★	★	★
HR003G	○	○	○	★	★	★	★
HR005G	★	★	★	★	★	○	○
HR006G	★	★	★	★	★	○	○
HR007G	○	○	○	★	★	★	★
HR008G	○	○	★	★	★	○	○
HR010G	○	○	○	★	★	★	★
HS004G	★	★	★	★	★	○	○
HS009G	★	★	★	★	○	○	○
HS011G	★	★	★	★	○	○	○
HS012G	○	○	○	★	★	★	★
HS013G	★	★	★	★	○	×	×
HW001G	★	★	★	★	○	○	○
JR001G	○	○	○	★	★	★	★
JR002G	○	○	★	★	★	★	★
JV001G	×	×	×	★	★	★	★
JV002G	×	×	×	★	★	★	★
KP001G	○	○	○	★	★	★	★
LM002G	★	★	★	★	★	○	○
LM004G	★	★	★	★	★	★	★
LS002G	○	○	★	★	★	★	○
LS003G	★	★	★	★	★	○	○
LS004G	★	★	★	★	★	○	○
ML001G	×	★	★	★	★	★	★
ML002G	×	×	×	★	★	★	★
ML005G	×	★	★	★	★	★	★
ML006G	×	★	★	★	★	★	★
ML007G	×	★	★	★	★	★	★

Model	8.0 Ah BL4080H	8.0 Ah BL4080F	5.0 Ah BL4050F	4.0 Ah BL4040F	4.0 Ah BL4040	2.5 Ah BL4025	2.0 Ah BL4020
ML009G	×	★	★	★	★	★	★
ML011G	×	★	★	★	★	★	★
ML012G	×	★	★	★	★	★	★
MP001G	×	×	★	★	★	★	★
PB002G	○	○	○	★	★	★	★
PM001G	★	★	★	★	×	×	×
PS001G	○	○	○	★	★	★	★
PT001G	×	×	○	○	○	★	★
PV001G	○	○	★	★	★	★	○
RP001G	○	○	★	★	★	★	★
RT001G	×	×	×	★	★	★	★
SP001G	★	★	★	★	★	★	○
ST002G	○	○	○	★	★	★	★
TD003G	○	○	○	★	★	★	★
TD004G	×	○	○	★	★	★	★
TM001G	○	○	○	★	★	★	★
TW002G	○	○	○	★	★	★	★
TW005G	○	○	○	★	★	★	★
TW007G	○	○	○	★	★	★	★
TW009G	★	★	★	★	○	×	×
TW010G	★	★	★	★	○	×	×
TW011G	○	○	○	★	★	★	★
UA003G	★	★	★	★	★	○	○
UA004G	★	★	★	★	★	○	○
UB001G	★	★	★	★	★	★	○
UB002G	○	○	○	★	★	★	★
UC004G	×	×	○	★	★	★	○
UC016G	★	★	★	★	○	×	×
UC022G	×	×	★	★	○	×	×
UC029G	×	×	×	★	★	★	★
UC030G	★	○	○	○	×	×	×
UH004G	○	○	○	★	★	★	★
UH006G	○	○	○	★	★	★	★
UH014G	×	×	○	★	★	★	★
UH020G	○	○	○	★	★	★	★
UN001G	★	★	★	★	★	★	★
UR003G	★	★	★	★	★	★	○
UR007G	★	★	★	★	★	★	○
UR008G	★	★	★	★	★	★	○
UR012G	★	★	★	★	○	○	○
UR014G	★	★	★	★	○	○	○
UR017G	×	×	★	★	★	★	★
UT001G	★	★	★	★	★	○	○
UV001G	★	★	★	★	★	★	○
UX01G	★	★	★	★	★	○	○
VC001GL	★	★	★	★	★	○	○
VC002GL	★	★	★	★	★	○	○
VC005GL	★	★	★	★	★	○	○
VC006GM	★	★	★	★	★	○	○
VC008G	★	★	★	★	★	★	★
VC009G	★	★	★	★	★	★	★
VC010G	★	★	★	★	★	★	★
VC011G	★	★	★	★	★	★	★
VC013GL	★	★	★	★	★	★	★
VR001G	★*	★*	★*	★	★	○	○
VS001G	★	★	★	★	★	★	★
WT001G	×	×	★	★	★	★	○

*Only applicable with Battery Case L set

Carbon Brush List

Carbon Brush	Part Number	Applicable Model									
CB-51	181021-2	4300BV	6016	N1900B							
CB-64	191627-8	4327	4329	6412	6413	4327M	BO3710	BO5041	GD0603	GV5010	GV6010
		JV0600K	M0600B	M4301B	M9201B						
CB-65	191628-6	6905B									
CB-85	191998-3	HP1630	M0801B	M4000B	M6001B	M6501B	M8100B	M8103B			
CB-100	181030-1	6906	9215SB	9924DB							
CB-106	181410-1	1911B	M3601B	RP0900							
CB-132	191972-1	KP0810	UC3541A	UC4041A							
CB-153	181044-0	1805N	2012NB	2416S	2704	3501N	3600H	3612BR	4107R	5008MG	5016B
		5402	9401	HS0600	LF1000	LS0714	LS1019L	LS1030N	LS1040	LS1219L	LS1440
		M9400B	N5900B	TW1000	UC3551A	UC4051A					
CB-174	196018-8	HS6100									
CB-203	191953-5	HW1200	HW1300	LC1230	LW1400	LW1401	M2400G/B	M2401B	M2403B	M3600B	M3602B
		RP1801	RP2301FC	RP2303FC							
CB-224	191T31-1	GA7070	GA7082	GA9070	GA9082						
CB-253	194547-5	GA6020C	PC5000C	PC5001C							
CB-260	191D85-2	GA4051R									
CB-264	1910M3-7	GA5091	GA5092								
CB-303	191963-2	2107F	4100KB	4100NH	4100NH2	4100NH3	4131	5806B	6305	6924N	9237C
		9404	9903	CA5000X	GA5010	GA5020	GA6010	GV7000C	HS6600	HS7010	HS7100
		HS7600	JN3201	JR3050T	JR3051T	JR3061T	JR3070CT	JS3201	M0400G/B	M1100G/B	M4001G/B
		M4100B	M4501B	M5801B	M6200B	M6600G/B	M9002B	PV7000C	SP6000J	UB1103	UT1305
		UT2204									
CB-318	191978-9	9563C	9565CR/PC	GA4040C	GA4041C	GA4541C	GA5041C	GA5080R	GD0800C	GD0801C	GD0811C
		PC5010C	PK5001C	PO5000C	PO6000C	PW5001C	SA5040C	SG1251J			
CB-325	194074-2	9553HBG	9553HNG	9556HNG	9556HN/NB	9556HPG	9556PB	9557HNG	9557NBG	9557HPG	9558HNG
		9558NBG	9558HPG	BO6050J	GA4040	GA4540	GA4540R	GA5040	GA6040	GD0600	GD0601
		HR2320T	HR2470	HR2611FT	HR2630	HR2631FT	HR2652	HR2810	M9509B	M9511G/B	M9513B
		HR2670									
CB-411	191940-4	3709	3901	4403	6922NB	9031	9911	DF0300	DS4012	DS5000	HP0300
		JN1601	KP0800X	M1901G/B	M1902B	M3700B	M3701B	M3702B	M4302B	M9503G/B	M9504G
		RT0700C	TD0101F	TW0200	TW0350						
CB-419	191962-4	4350CT	4351CT	9035H	BO4510H	BO4556	BO4901	BO5031	DA3010F	DP2010	FS2300
		FS2500	FS2700	FS4200	FS6300	HP1230	HP2050	HR1830	HR2020	JS1300	M9200G/B
		M9202B	M9204B	TD0100							
CB-459	194722-3	GA4030	GA4030R	GA4031	GA4034	GA4530	GA4530R	GA5030	GA5030R	GA5034	HR1840
		HR1841F	JS1601	JS1602	M0900B	M0910B	M8700G/B	M8701X3B	M9506B	M9508G/B	M9512B
		M9800B	PJ7000	TM3000C	TM3010C						
475	1914L5-0	DP4021									
	JM23000123	LS1201FL	LS1018L	M2300B	MLT100						
	UD00EBD002	HB350									
Auto Cut-out Carbon Brush											
CB-105	181038-5	9045B	HM0810TA	M8600B							
CB-155	181048-2	HM1201									
CB-173	195483-8	VC1310L	VC2211M	VC2510L	VC3210L	VC3211M					
CB-175	195844-2	HM1203C	HM1213C	HM1214C	HM1307C	HM1317C	HR4501C	HR4511C	HR5202C	HR5212C	HR5211C
CB-204	191957-7	4112HS	4114S	GA7020	GA7040R	GA7050	GA9020	GA9040R	GA9050	GS5000	GS6000
		HM1306	HM1810	M9000B	M9001G/B						
CB-218	197129-2	GA7060	GA7060R	GA7061R	GA7062	GA7063R	GA9060	GA9060R	GA9061R	HM1501	HM1511
		HM1812									
CB-350	194160-9	HK1820	HM0870C	HM0871C	HR3001C	HR3011FC	HR3200C	HR3210C	HR3530	HR4001C	HR4002
		HR4003C	HR4013C	HR4030C							
CB-353	197208-6	DVC150L	DVC151L	DVC860L							
Carbon Brush for Cordless Tool											
CB-5	198887-3	DTD156									
CB-430	191971-3	DCO180	DCS550	DCS552	DGA402	DGA452	DGD800	DGD801	DHR165	DJN161	DJS101
		DJS161	DJV180	DPB180	DPJ180	DSS501	DUB361	DUC122			
CB-440	194427-5	DDA351	DDF458	DDF482	DFR550	DHP458	DHP482	DJS130	DSC162	DSC191	DPP200
		DTW152	TD091D								
CB-441	194435-6	DHR202	DHR241	DHS630	DJR181	DJR186	DKP180	DLS713	DSS610	DTW450	
CB-442	194928-3	DHR263	DHS710	DUC252	DUH651	BUH650/ UH650D		BUH550/UH550D			
CB-448	196854-2	DTD149	DTD152	DTW251							



12 MONTHS WARRANTY

Waranti 12 bulan • 12个月保修期

* Applicable on all Makita Tools, except heat gun (period of 6 months warranty)

* Untuk semua Makita Tool, kecuali Heat Gun (waranti 6 bulan) | *有效于所有 Makita 工具, 热风枪除外 (享有6个月保修)

Makita Standard Warranty

Piawaian Waranti Makita • Makita 保修服务说明

Every Makita Product is thoroughly inspected and tested before leaving the factory. Subject to the following terms and conditions, the Product (Tool, Battery, Charger) is warranty against defective materials and manufacturing defects for a period of twelve (12) months from the date of purchase (applicable for purchases made from 1st October 2017 onwards) as evidenced from the sale or tax invoice (with tool serial number) and Makita Authorised Service Centre or Makita Service Centre undertakes, at our option, to repair or replace, free of charge.

Conditions of warranty

This warranty will NOT cover or shall be null & void in any of the following events even during the warranty period:-

1. Damage resulting from normal wear and tear (Carbon brush/ holder/ cap, switch, gear, grinding/ cutting wheels, bits, saw blades, etc.,)
2. Damage resulting from use of improper accessories, non genuine replacement parts, disassembly, tampering, alteration and repairing in any way that affects its performance.
3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
4. Abnormal voltage or the usage of generator, wrong usage not in accordance with the Operating Manual.
5. If the serial number on the tool, seal on the battery and charger has been defaced or removed.
6. If the receipt or invoice that display the date of purchase could not be present.

Setiap produk Makita diperiksa dan diuji dengan teliti dari kilang. Waranti produk (Alat, Bateri, Pengcas Bateri) tertakluk kepada terma dan syarat berikut, sekiranya terdapat kecacatan pada bahan atau kerosakan disebabkan pembuatan dari kilang dalam tempoh 12 bulan bermula dari tarikh pembelian (untuk pembelian bermula dari 1hb Oktober 2017), dengan bukti pembelian pada resit atau invoice bercukai (dengan nombor siri alat), terikat kepada keputusan Pusat Servis diiktiraf oleh Makita atau Pusat Servis Makita untuk membaiki secara percuma.

Syarat-syarat waranti

Waranti ini TIDAK akan meliputi atau akan dibatalkan & tidak sah sekiranya berlaku salah satu kejadian yang berikut semasa berada dalam tempoh waranti:-

1. Kerosakan akibat daripada haus dan lusuh biasa (karbon/ pemegang/ tukup, suis, gear, cakera mencanai/ memotong, mata gerudi, bilah gergaji, dll.,)
2. Kerosakan akibat daripada penggunaan aksesori yang tidak sesuai, alat ganti yang tidak asli, pembukaan, perbuatan merosakkan, pengubahan dan pembaikan yang mempengaruhi prestasinya.
3. Kerosakan akibat kecuai, kemalangan, bencana, penyimpanan atau penyelenggaraan yang tidak wajar, penyalahgunaan yang jelas disebabkan oleh beban yang melebihi kemampuannya.
4. Voltan tidak normal atau penggunaan penjana, cara penggunaan yang salah dan tidak mengikut Manual Operasi.
5. Jika nombor siri pada alat, balut/ cap pada bateri dan pengcas tercacat atau ditanggalkan.
6. Jika resit atau invoice yang memaparkan tarikh pembelian tidak dapat ditunjukkan.

每个 Makita 产品生产制造都经过彻底检查和测试并严格把关确认品质。根据以下保修条件, 产品保修 (工具, 电池, 充电器) 涵盖材质和生产上的瑕疵, 于销售单据 (附上工具生产编号) 与税收发票上所显示的购买日期起十二 (12) 个月内 (从1-10-2017选购开始), 以 Makita 授权服务中心或 Makita 服务中心的判断为准而提供无收费维修。

保修规定

Makita 均不承担基于以下违反保修行为而造成的产品故障、工作异常或损坏的责任。

1. 正常消耗零件。(例如: 碳刷/支架/盖, 开关, 齿轮, 研磨/切割片, 钻头, 锯片等)。
2. 使用不正确的配件, 更换非原装零件, 拆除和改造等任何影响其性能而引起的损坏。
3. 因人为疏忽, 意外, 灾难, 不正确的保管或保养, 滥用和误用, 超出工具负荷能力等原因导致的损坏。
4. 使用非工具所规定电压和发电机, 未按说明书安装及使用工具。
5. 工具上的编号, 电池和充电器上的印章已被污损或除去。
6. 无法提供销售单据或税收发票。

** Makita reserved the rights of amend conditions of warranty without prior notice. In the event of differences arising between the English, Bahasa Malaysia and Chinese versions, the English version shall prevail.
Makita berhak untuk meminda syarat-syarat waranti pada bila-bila masa tanpa sebarang notis. Jika terdapat perbezaan antara bahasa, maka maklumat versi Bahasa Inggeris harus digunakan.
Makita 保留修改保修规定的权利, 恕不另行通知。如果内容有任何差异或不一致, 概以英文版本为准。



Please visit our website for contact of nearest
AUTHORISED SERVICE CENTRE
www.makita.my/Customer-Services/

Sila layari laman web kami untuk maklumat Pusat Servis Diiktiraf
请浏览我们的网页以获取授权服务中心的详细信息



MAKITA SERVICE CENTRE
SERVIS & BAIK-PULIH 售后服务及维修
www.makita.my/makita-service-centre/



PRODUCT RANGE
SIRI PRODUK 产品系列
www.makita.my/cordless-tools-batteries/



ACCESSORIES
AKSESORI 配件
www.makita.my/accessories/



ABOUT US
MENGENAI KAMI 公司简介
www.makita.my/makita-malaysia/



LATEST INFO & PROMOTION
INFO & PROMOSI TERKINI 最新信息和促销
www.makita.my/news-events/



E-CATALOGUE
KATALOG PRODUK 商品目录
<https://www.makita.my/catalogue/>



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my

PRINTED IN MALAYSIA 2025.12/A3