


**High Power
Durability
Digital Communication**



XGT
40V Li-ion max

XGT
40V Li-ion max **XGT X2**
80V max

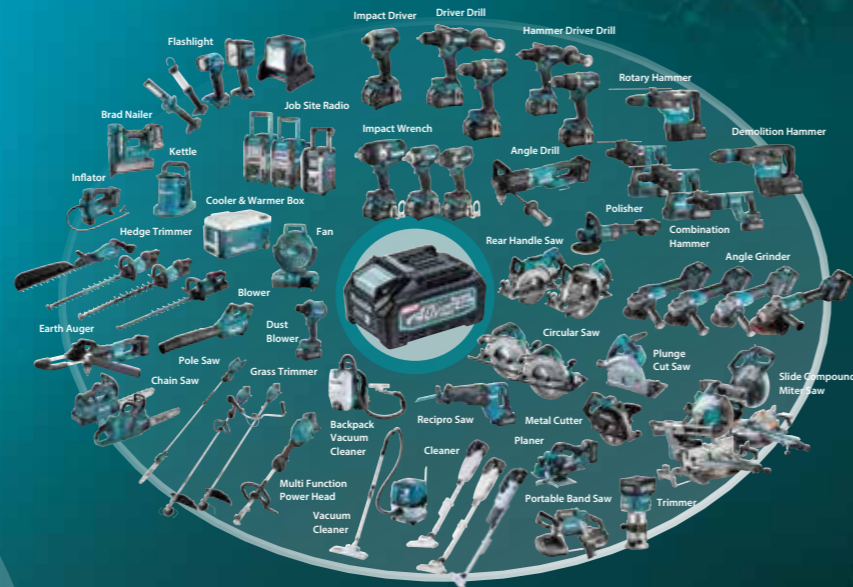

Accessories (optional)

Flexible shaft

Size	Part No.
ø32-1.2m	1910E1-5
ø32-1.7m	1910E2-3
ø32-2.4m	1910C2-9
ø38-1.2m	1910E3-1
ø38-2.4m	1910C4-5

photo: 1910C4-5

Adapter set (40Vmax)

Part No. 191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Battery case H set

Part No. 1910J4-4
For PDC01 and PDC1200



Battery case L set

Part No. 1910J1-0
For BL4050F, BL4080F



Portable Power Pack (use with Adapter set and Battery case H set)

PDC01 Powered by up to four 18V LXT batteries



PDC1200 Powered by 36V-40Vmax built-in battery



Charger: DC4001

VR001GZ

Cordless Concrete Vibrator

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah
(5.0Ah & 8.0Ah only applicable with battery case L set)



Standard Equipment: Wrench

* GZ: Without Charger & Battery



Vibrations Per Minute (VPM)	Power mode: 15,500 Normal mode: 12,000
Dimensions (L x W x H)	282x112x258mm (11-1/8x4-3/8x10-1/8")
Net Weight	4.8 - 7.8kg (10.6 - 17.2lbs)
Continuous Usage Time (approx.)	Power mode: 35 min Normal mode: 50 min with BL4040 Ø 32 mm - 1.2 m shaft

Like us on Facebook
MAKITA MALAYSIA

*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

12 MONTHS WARRANTY



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

www.makita.my
makita@makita.my



PRODUCT DETAILS
Models and specs may vary by country

BL MOTOR XPT



Suitable for a wide range of jobsites



Power mode

For a wide range of concrete compaction, such as of soil floors, pillars, and mat foundations.

Vibration per minute

15,500 min⁻¹

Work amount (on a full battery charge)

35 min

(With ø32mm-1.2m shaft and BL4040 battery)

Normal mode

Ideal for delicate works, such as step finishing or closure of temporary construction openings, where concrete is required not to flow out of the mold.

Vibration per minute

12,000 min⁻¹


Work amount (on a full battery charge)

50 min

(With ø32mm-1.2m shaft and BL4040 battery)

Constant speed control

allows for stable compaction work.

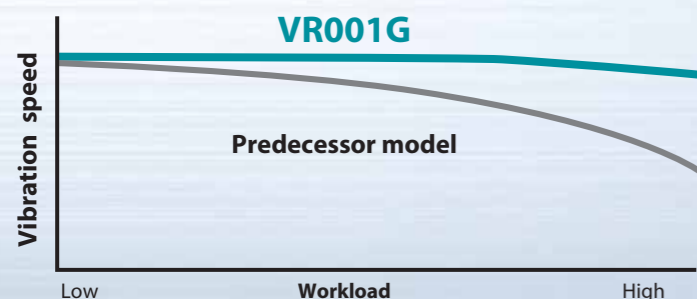

Switch cover

protects switch trigger and lock-on button from being blocked by adhered and hardened material such as concrete.



Lock-on button

Switch trigger

Various Battery covers

are available for all recommended or compatible batteries



The supplied Battery cover is compatible with BL4020/ BL4025/ BL4040.

The following Battery covers are also available as an option:

- Battery case L set for BL4050F/BL4080F
- Battery case H set for PDC01/PDC1200

XPT eXtreme Protection Technology

