



Cordless Bar Light ML012G / DML818



40V L^{Li-ion} max

18V LITHIUM-ION



ML012G



ML012G



DML818

Continuous use
on a full battery charge

ML012G

High / Medium / Low

4.5 / 9.5 / 20h

Battery: BL4025

DML818

High / Medium / Low

4 / 9.5 / 19h

Battery: BL1850B

ML012G



ML012G



PRODUCT
DETAILS

Models and specs
may vary by country



XPT

DML818



DML818



PRODUCT
DETAILS

Models and specs
may vary by country



XPT

Bar type light for wide area illumination

For wide area illumination, we use a long bar type light consisting of two LED light bars, each of which is covered with a light-diffusing plastic lens.



Max luminous flux
1,700 lm
with all 42 LEDs on

ML012G

Foldable

- LED light bar section can be folded in half, allowing for double-sided illumination when folded.
- Compact for transportation or storage




Illuminating angle adjustment by rotating LED light bar

By rotating LED light bar clockwise maximum 90 degrees or counterclockwise maximum 180 degrees, user can adjust the illuminating angle to 7 angles.




Telescopic hook

- Clip on each end of Telescopic hook holds the LED light bar section securely.
- Telescopic hook allows user to attach the appliance to the hood, back door and more of vehicles, making it ideal for use as a worklight in automotive workshops.



Illuminating angle adjustment with Telescopic hook attached

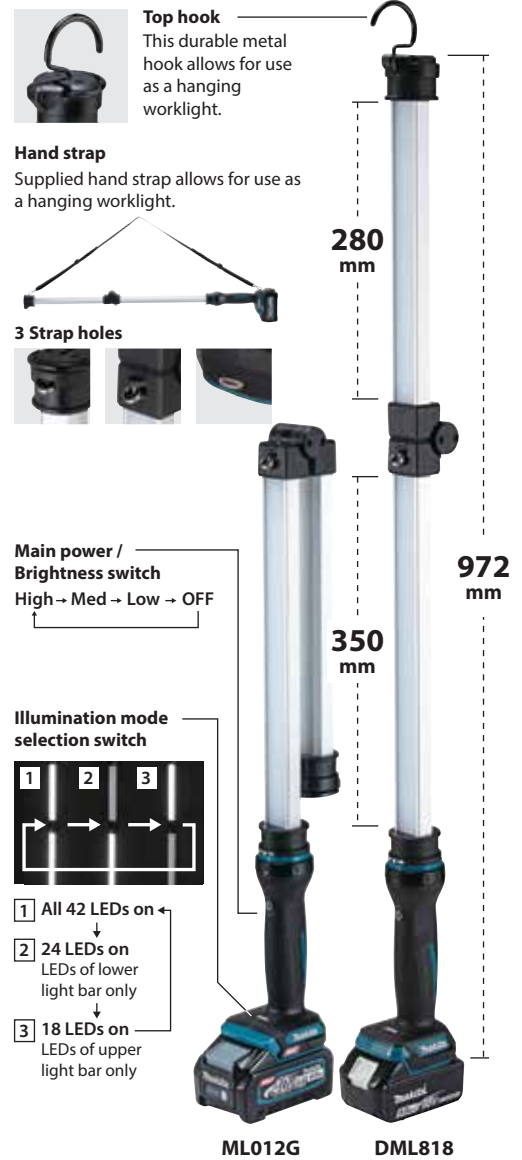

Top hook
This durable metal hook allows for use as a hanging worklight.

Hand strap

Supplied hand strap allows for use as a hanging worklight.




3 Strap holes



Main power / Brightness switch

High → Med → Low → OFF

Illumination mode selection switch



- 1 All 42 LEDs on
- 2 24 LEDs on LEDs of lower light bar only
- 3 18 LEDs on LEDs of upper light bar only

ML012G

DML818

Continuous use Illuminating with both lower and upper LED light bars (with all 42 LEDs on)

Model No.	ML012G					DML818					
	40V max					18V					
Battery	BL4020	BL4025	BL4040/F	BL4050F	BL4080F	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B
Brightness setting											
High (1,700 lm)	3.5 h	4.5 h	7.0 h	8.5 h	14 h	1.3 h	1.7 h	2.4 h	3.0 h	4.0 h	5.0 h
Medium (800 lm)	7.5 h	9.5 h	15 h	19 h	31 h	2.8 h	3.5 h	5.0 h	7.0 h	9.5 h	11 h
Low (400 lm)	16 h	20 h	32 h	40 h	65 h	5.5 h	7.5 h	10 h	15 h	19 h	23 h

DML818 | ML012G

Cordless Bar Light

- Supplied Telescopic hook allows user to attach the appliance to the hood, back door and more of vehicles, making it ideal for use in automotive industry.



40V max *Recommended batteries (40V max)
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah

18V

Standard Equipment:
Telescopic Hook, Hand Strap

- Without Charger & Battery



Luminous Flux	High: 1,700 Med: 800 Low: 400 lm
Brightness Setting	3
Dimensions (L x W x H)	DML818 972 x 80 x 101 mm (38-1/4 x 3-1/8 x 4") ML012G 972 x 85 x 100 mm (38-1/4 x 3-3/8 x 3-15/16")
Net Weight	1.1 kg (2.4 lbs)
Continuous Usage Time (approx.)	DML818 with BL1850B Low: 19 hrs Med: 9.5 hrs High: 4 hrs ML012G with BL4025 Low: 20 hrs Med: 9.5 hrs High: 4.5 hrs

Like us on Facebook
MAKITA MALAYSIA

*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No. 12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my