

Cordless Hole Puncher PP001G

XGT 40V max Li-ion


Automatic punch return

After a punching cycle is completed, hydraulic pressure automatically pulls off the punch from workpiece and returns it to the initial position to enable efficient continuous hole punching.

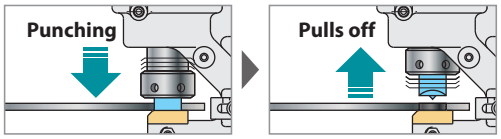

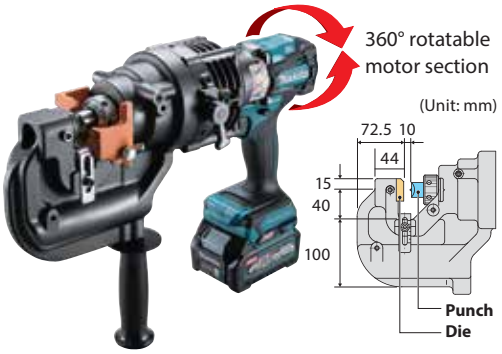

Compact design

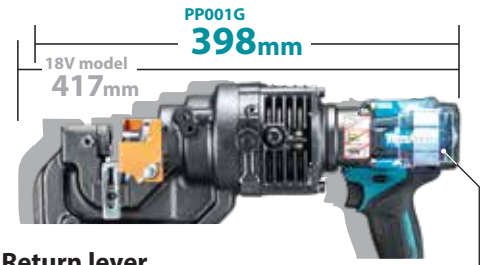

Return lever



BL MOTOR

Portable and hydraulic (No need for hydraulic pressure hose)

High-efficiency punching



Working time reduced by about

46%

compared with our 18V model

Max punching capacity
Cutting material: General steel (SS400)

ø20 t9mm

ø19 t10mm

PRODUCT DETAILS
Models and specs may vary by country
PP001G

Compatible with various steel materials

Punching capacity

Flat bar	Max: 80mm x t9 (Center punching)	**Channel**	Min: 75mm x 40mm Max: 125mm x 65mm (Flange punching)
Angle	Min: 40mm x 40mm x t3 Max: 80mm x 80mm x t9	**H-steel**	Min: 100mm x 100mm Max: 300mm x 150mm



Accessories (optional)

Combination of punch and die

· Punching holes through a thin structural metal plate may cause deformation of the plate and burr on the holes.
· If you need precision punching, see the tables below to select an optimum combination of punch and die.

● Round punching

Punch  **Die** 

● Round punching										
Punch		Die		Cutting material		Die		Cutting material		
Hole size (mm)	Part No.	Hole size	Part No.	Mild Steel	Aluminum	Hole size	Part No.	Mild Steel	Stainless Steel (Inox)	Channel
6	SC05340040	SA6	SC00000202	t2-t3.2	t2-t3.2	SB6	SC00000203	t2-t4	t3-t4	-
6.5	SC05340050	SA6.5	SC00000204	t2-t3.2	t2-t3.2	SB6.5	SC00000205	t2-t6	t3-t4	-
8	SC05340060	SA8	SC00000206	t2-t3.2	t2-t3.2	SB8	SC00000207	t2-t6	t3-t4	-
8.5	SC05340070	SA8.5	SC00000208	t2-t3.2	t2-t3.2	SB8.5	SC00000209	t2-t6	t3-t4	-
10	SC05340080	SA10	SC00000210	t2-t3.2	t2-t3.2	SB10	SC00000211	t2-t6	t3-t4	t8
11	SC05340090	SA11	SC00000212	t2-t3.2	t2-t3.2	SB11	SC00000213	t3-t9	t3-t6	t8
12	SC05340100	SA12	SC00000214	t2-t3.2	t2-t3.2	SB12	SC00000215	t3-t9	t3-t6	t8
13	SC05340110	SA13	SC00000216	t2-t3.2	t2-t3.2	SB13	SC00000217	t3-t9	t3-t6	t8
14	SC05340120	SA14	SC00000218	t2-t3.2	t2-t3.2	SB14	SC00000219	t3-t9	t3-t6	t8
15	SC05340130	SA15	SC00000220	t2-t3.2	t2-t3.2	SB15	SC00000221	t3-t9	t3-t6	t8
16	SC05340140	-	-	t2-t3.2	t2-t3.2	SB16	SC05332710	t3-t9	t3-t6	t8
18	SC05340150	SA18	SC00000222	t2-t3.2	t2-t3.2	SB18	SC00000223	t3-t9	t3-t6	t8
19	SC05340170	-	-	-	-	SB19	SC05332740	t3-t9	t3-t6	t8
20	SC05340160	SA20	SC05352500	t2-t3.2	t2-t3.2	SB20	SC05352510	t3-t9	t3-t6	t8

● Round punching						
Punch		Die		Cutting material		
Hole size (mm)	Part No.	Hole size	Part No.	Mild Steel	Stainless Steel (Inox)	Channel
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
12	SC05340400	SB12	SC00000215	t10	t3-t6	t10
13	SC05340410	SB13	SC00000217	t10	t3-t6	t10
14	SC05340420	SB14	SC00000219	t10	t3-t6	t10
15	SC05340430	SB15	SC00000221	t10	t3-t6	t10
16	SC05340440	SB16	SC05332710	t10	t3-t6	t10
18	SC05340450	SB18	SC00000223	t10	t3-t6	t10
19	SC05340460	SB19	SC05332740	t10	t3-t6	t10
20	-	-	-	-	-	-



Hydraulic oil ISO46

Part No.
SC00000106
35mL



PP001GZK

Cordless Hole Puncher

40Vmax

*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah, 8.0Ah (H)



Cutting Capacity	General steel : Ø 20 (thick 9 mm) Stainless steel : Ø 20 (thick 6 mm)
Dimensions (L x W x H)	398 x 129 x 315 mm (15-5/8 x 5-1/8 x 12-3/8")
Net Weight	11.6 - 12.8 kg (25.6 - 28.2 lbs)

Standard Equipment:
Punch, Die, Bar for Fastening Nuts,
Hex Wrench, Wrench

• GZK: With Carrying Case, Without Charger & Battery

BL MOTOR

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) I Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
Tel: 07-364 9406 I Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
Tel: 082-496 800 I Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 I Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:

www.makita.my