





**High Power  
Durability  
Digital Communication**



Continuous run time  
Push-Drive / Self-propelled  
**76/56 min**  
Battery: BL4080F x2 on a full battery charge

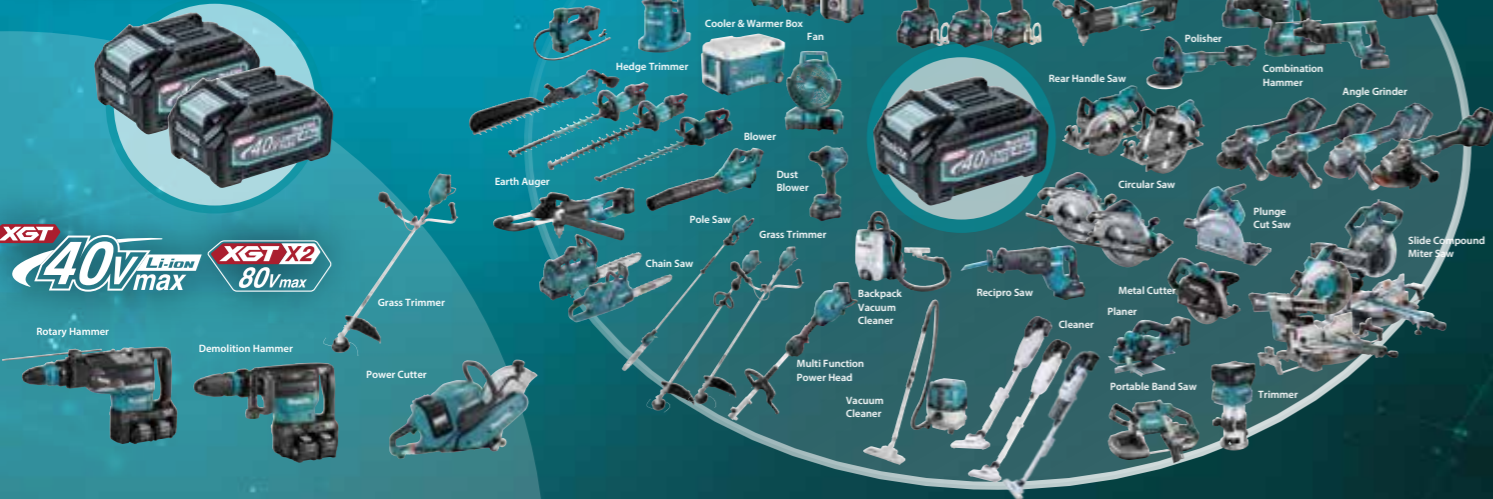

**Accessories (optional)**

Blade type	Part No.	Applications and features
 2-tooth blade	191V96-5	Standard blade for grass collection and mulching
 Collecting blade	191W87-2	Longer and higher blade tip generates larger amount of airflow, providing more efficient discharge of grass clippings. This blade, therefore, enables clog-free collection of grass clippings even in mowing a large amount of grass.
 Mulching blade	191Y65-4	This blade cuts grass clippings into small particles and scatters them evenly on the ground for mulching. The blade is, therefore, designed to generate a proper volume of airflow enough to circulate grass clippings in the cutting deck.

**LM002GZ** 530 mm (21")

**Cordless Lawn Mower**

**40Vmax**



\*Recommended batteries  
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



VIDEO CLIP  
Models and specs may vary by country

Standard Equipment:  
Blade, Mulching Plug,  
Socket Wrench, Rod, Discharge Chute

\*GZ: Without Charger & Battery



Max Output	1,900 W
Cutting Width	534 mm (21")
Cutting Height	20 - 100 mm (13/16 - 3-15/16")
Grass Box Capacity	70 L
No Load Speed (RPM)	Normal Mode: 2,800 Noise Reduction Mode: 2,300
Propelling Speed	1.5 - 5.0 km/h
Wheel Size	Front / Rear: 230 mm (9")
Dimensions (L x W x H)	1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2")
Net Weight	29.5 - 34.7 kg (65.0 - 76.5 lbs)
Continuous Usage Time (approx.)	95 min (push-drive)   60 min (self-propelled) Moving Area 3,400 m <sup>2</sup> (push-drive) 2,500 m <sup>2</sup> (self-propelled) with BL4080F x2

Like us on Facebook  
**MAKITA MALAYSIA**

\*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



**Makita Power Tools (Malaysia) Sdn. Bhd.** Co. Registration No.: 201301001778 (1031615-M)

**HQ & Service Centre**  
Lot 824, Jalan Subang 5, Subang Industrial Area,  
47500 Subang Jaya, Selangor.  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

**Johor (Johor Bahru) Service Centre**  
No. 12 & 14, Jalan Rosmerah 2/9,  
Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07-364 9406 | Fax: 07-364 9407

**Sarawak (Kuching) Service Centre**  
Lot 1227, Lorong Demak Indah 2A,  
Demak Laut Industrial Area, Phase 2A,  
93050 Kuching Sarawak.  
Tel: 082-496 800 | Fax: 082-496 900

**Sabah (Kota Kinabalu) Service Centre**  
Lot 19, Jalan Buah Duku,  
Kolombong Light Industrial Estate, Off Jalan Kolombong,  
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
Tel: 088-388 278 | Fax: 088-388 279



[www.makita.my](http://www.makita.my)  
makita@makita.my



## Excellent performance in heavy duty applications

### Mowing area

on a full battery charge (With BL4080F x2 battery)

The results of mowing area and run time when mowing grass from 20mm differs by the density of grass, the cutting height, etc.

**LM002G (534mm)**



**BL  
MOTOR**

New outer rotor motor optimized for lawn mower



### Higher mowing performance

The blade is designed so that it tilts towards the front side of the mower when attached, preventing double-cutting for reduced current consumption.



### Higher mowing performance

Optimum blade design for less rotational speed reduction of the blade



Powered by 40Vmax  
XGT Li-ion battery  
(two in parallel or one)

### Automatic battery switching

If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to the other one.

### Grass level indicator




**Cutting, Collecting, Mulching\*<sup>2</sup>, Rear discharge, Side discharge\*<sup>3</sup>**

\*<sup>2</sup> Mulching plug required. \*<sup>3</sup> Discharge chute required.

### Self-propelled type with a speed range of 1.5-5.0km/h

- On/off switch lever for self-propelled function
  - Quick acceleration (0.5s to full speed)
  - Self-propelled speed: 1.5-5.0km/h
- The lowest speed has been reduced to enable the machine to turn in a small space.

Approx speed range: km/h	Main application
1.5-2.5	Mowing a small area around tree, near obstacle, etc where lawn mower is required to turn in a small space
2.5-4.0	Heavy-duty applications such as mowing on slope, cutting dense and long grass, etc
4.0-5.0	Light- to medium-duty mowing on flat ground

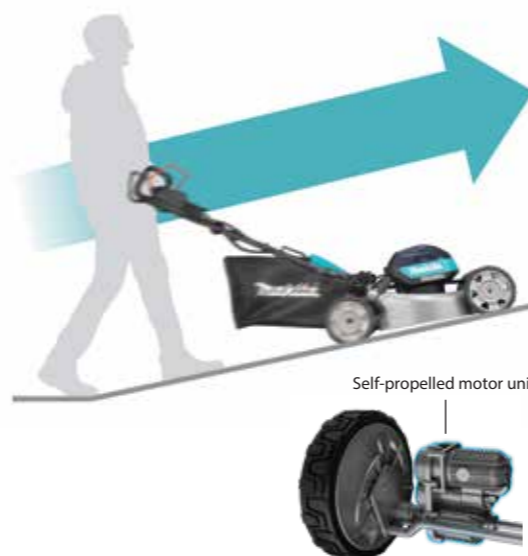

Cutting height is adjustable by one handle  
20-100mm



Variable speed control lever



Rigid foldable handle



The inside of cutting deck can be washed.  
(Self-propelled section must not get wet with water.)



Large wheel  
front/rear ø230mm



Vertical storage

### 3 Cutting mode selection

Selectable according to operating environment:

- Normal mode
- Soft no-load mode
- Noise reduction mode



High water-resistance allows to operate the machine even if it is wet with water.