

Accessories (optional)

Dump bucket 200 set

Part No. 191B69-8
Loading platform of dump bucket type
*Can be used by attaching to Dump unit installed on Base unit (Wheelbarrow body).



Carrier set

Part No. 191B67-2
• Pipe frame carrier
• Variable-size loading platform
*Can be used by attaching to Dump unit installed on Base unit (Wheelbarrow body).



Flat bucket set

Part No. 1911B3-6
Includes Flat bucket* and Flat bucket base.
*equipped with a capped nozzle for draining liquid



Dump unit set

Part No. 191B63-0
Dump unit for Pipe frame carrier or Dump bucket 200

Tire 330 (single) set

Part No. 1911K4-7
For lawn and pavement
• Tubed tire
• Color: Black
• Includes one tire.



Gray tire 330 (single) set

Part No. 1911K5-5
For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.
• Tubed tire
• Color: Gray
• Includes one tire.



Gray tire 210 (single) set

Part No. 1911K6-3
For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.
• Tubed tire
• Color: Gray
• Includes one tire.



Battery Powered Wheelbarrow

DCU603 / DCU604 / DCU605



DCU603Z

Battery Powered Wheelbarrow

• 4-wheel barrow (with front-wheel drive system) for stable load-carrying even with heavy loads.
• High water-resistance allows to operate the machine even if it is wet with water.



Dump Bucket

Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed, during operation: 1,480 x 730 x 820 - 1,030 mm (58-1/4 x 28-3/4 x 32-1/4 - 40-1/2")
Net Weight	122 - 124 kg (269 - 273 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

• Z: Without Charger & Battery



DCU604Z

Battery Powered Wheelbarrow

• 4-wheel barrow (with front-wheel drive system) for stable load-carrying even with heavy loads.
• High water-resistance allows to operate the machine even if it is wet with water.



Pipe Frame Carrier

Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed, during operation: 1,450 - 1,600 x 730 - 1,080 x 820 - 1,030 mm (57-63 x 28-3/4 - 42-1/2 x 32-1/4 - 40-1/2")
Net Weight	119 - 120 kg (262 - 265 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

• Z: Without Charger & Battery



DCU605Z

Battery Powered Wheelbarrow

• 4-wheel barrow (with front-wheel drive system) for stable load-carrying even with heavy loads.
• High water-resistance allows to operate the machine even if it is wet with water.



Flat Bucket

Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed, during operation: 1,440 x 730 x 820 - 1,030 mm (56-3/4 x 28-3/4 x 32-1/4 - 40-1/2")
Net Weight	104 - 106 kg (229 - 234 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

• Z: Without Charger & Battery



DCU603



DCU604



DCU605

DCU603

Manual dump
+ Dump bucket



DCU604

Manual dump
+ Pipe frame carrier



DCU605

Flat bucket



Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No. 12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my



Powered by two 18V LXT batteries in series

on flat ground (0 - 3 degrees) | on slope (3 - 12 degrees)

Max load capacity **300kg** | **180kg**

Traveling distance **7.2km**
with BL1860B x 4

Traveling speed change

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds (1.5/3.5/5.0 km/h)	1 speed (1.0 km/h)



Max climbing ability **12°**

High power Brushless motor **BL MOTOR**

1 Hand brake lever

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.


2 Electric brake plus Electromagnetic brake

Electric brake

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

Electromagnetic brake

- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.

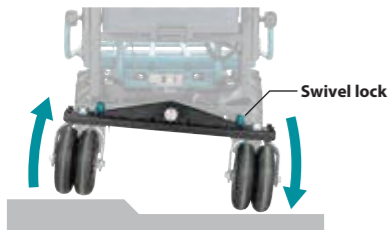

Driving wheels (Front wheels) touch the ground stably.

Rear wheel axle is designed to tilt to enable Front wheels (driving wheels) to stably touch the ground for reliable driving even on bumpy road surfaces.

Double tires (Rear wheels only)

Double tires, each of which rotates independently, improve swivel performance.



Headlights

- turn on/off by pressing a light button on the battery box.
- turn off automatically with no operation for 10 minutes.



Tool-less handle height adjustment

Handle height can be adjusted according to user's height without tool simply by turning 2 knob screws.



Two or four batteries can be installed for a 2-series / 2-parallel connection for a secure amount of work.



Wet Guard / IPX4-compatible

High water-resistance allows to operate the machine even if it is wet with water.



DCU603

Manual dump + Dump bucket

- Rust-free plastic bucket accepts wet loads.
- Inside bottom and front faces are angled for easy dump operation.



Manual dump designed for increased efficiency in unloading



Bucket capacity

Heaped capacity

200 L

Full liquid capacity

100 L

DCU604

Manual dump + Pipe frame carrier

Ideal for container boxes or bagged materials



Manual dump

High unloading efficiency



Telescopic loading platform




DCU605

Flat bucket

- Rust-free plastic bucket accepts wet loads.
- Optimal for operations not requiring dump function such as feeding in stables



Capped nozzle for draining liquid is convenient when carrying liquid or cleaning the bucket.



Bucket capacity

Heaped capacity

295 L

Full liquid capacity

250 L

There is no screw on the inside of the bucket, allowing for smooth unloading operation using tool such as a clay-spade.

