



# Cordless Angle Grinder GA048G 100 mm



# 40V Li-ion max



**i**  
PRODUCT  
DETAILS  
Models and specs  
may vary by country

GA048G

No load speed

**11,000 min<sup>-1</sup>**

**BL MOTOR AFT XPT**

High work efficiency that exceeds the competing models has been achieved by using "Highly rigid, integrated drum type motor housing" and "Anti-vibration construction" to be compatible with high-speed BL motor.

No load speed **11,000 min<sup>-1</sup>**

**BL MOTOR**

**Integrated drum type motor housing**




**Anti-vibration construction**

Rubber damper is located between Motor housing and Main handle.

**AFT Active Feedback sensing Technology**

Shuts down the tool, if the rotation speed suddenly slows down.

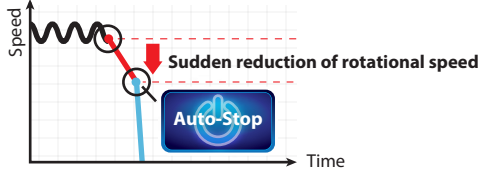


**Anti-restart function**



**Electric brake**

**Slide lever style wheel cover**



**Paddle switch**

**Excellent maneuverability**

the motor housing is designed as slim as possible, allowing for a variety of gripping options<sup>2</sup> to provide excellent maneuverability.

<sup>2</sup>User can grip the tool with his/her thumb or fingers placed not only on the main handle but also on the motor housing.



**XPT**

is engineered for improved dust and water resistance

**Extreme Protection Technology**



**Accessories (optional)**

**Cutting W.C.A set**  
Part No. 191V54-1

for abrasive cut-off wheel (wheel cover attachment)



**Rubber pad**  
Part No. 743009-6

for abrasive disc



**Sanding lock nut**  
Part No. 224502-4

for abrasive disc and rubber pad



**Vibration proof grip**  
Part No. 194514-0



**Grip 35 set**  
Part No. 158237-4



**GA048GZ 100 mm (4")**

**Cordless Angle Grinder**

High work efficiency that exceeds the competing models has been achieved by using "Highly rigid, integrated drum type motor housing" and "Anti-vibration construction" to be compatible with high-speed BL motor.



**40V<sup>max</sup>** \*Recommended batteries 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

**Paddle Switch**



Standard Equipment:  
Wheel Cover, Cutting Wheel Cover Attachment, Vibration Proof Grip, Lock Nut Wrench 20, Grinding Wheel 100X6X16 (A-80852)

\*GZ: Without Charger & Battery



Wheel Diameter	100 mm (4")
Max Abrasive Wheel Thickness	6.4 mm (1/4")
Hole Diameter	16 mm (5/8")
Cutting Depth	21 mm (13/16")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	343 x 117 x 144 mm (13-1/2 x 4-5/8 x 5-5/8")
Net Weight	2.8 - 5.2 kg (6.2 - 11.5 lbs)
Work Amount (approx.)	8 cuts with BL4040, concrete cutting 20 mm depth x 600 mm width with Diamond Wheel

Follow us on Facebook  
**MAKITA MSIA**

\*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

**12 MONTHS WARRANTY**

**Makita Power Tools (Malaysia) Sdn. Bhd.** Co. Registration No.: 201301001778 (1031615-M)

**HQ & Service Centre**

Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

**Johor (Johor Bahru) Service Centre**

No. 12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor  
Tel: 07-364 9406 | Fax: 07-364 9407

**Sarawak (Kuching) Service Centre**

Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak  
Tel: 082-496 800 | Fax: 082-496 900

**Sabah (Kota Kinabalu) Service Centre**

Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah  
Tel: 088-388 278 | Fax: 088-388 279



[www.makita.my](http://www.makita.my)  
✉ makita@makita.my