

Portable Power Pack

Portable Power Pack

High energy capacity of 1,500Wh PDC1500

Charger
DC4001
Charging time
PDC1500: 450 min.



Energy capacity of 1,200Wh PDC1200

Charger
DC4001
Charging time
PDC1200: 360 min.



XPT

High water-resistance allows to operate the machine even if it is wet with water.



Battery Powered

Blower
UB003C



Grass Trimmer
UR101C
UR201C
UR202C



Backpack Blower
UB004C



Lawn mower
LM001C



Adapter set

40Vmax

Part No.
191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

18Vx2

Part No.
191J51-5



Adapter between Battery box of Portable power pack and Product on 18Vx2 LXT platform

Accessories (optional)

End nozzle 74 set Part No. 1914H0-2

A nozzle suitable for blowing away wet fallen leaves or other heavy objects



Flat nozzle set Part No. 1914H1-0

A nozzle for blowing off fallen leaves adhering to the ground



UB004CZ

Battery Powered Backpack Blower

• High blower performance similar to 65 cc class engine backpack blower.



*Not compatible with PDC01



Standard Equipment:
End Nozzle, Flat Nozzle

• CZ: Without Charger & Battery



Air Volume	Boost Mode: 20.9 m ³ /min	Cruise Control Mode 1: 8.5 Mode 2: 15.2 Mode 3: 19.7 m ³ /min
Max Air Velocity	Boost Mode: 80.7 m/s	Cruise Control Mode 1: 33.2 Mode 2: 59.0 Mode 3: 76.3 m/s
Average Air Velocity	Boost Mode: 67.6 m/s	Cruise Control Mode 1: 27.3 Mode 2: 49.1 Mode 3: 63.8 m/s
No Load Speed (RPM)	Boost Mode: 23,800	Cruise Control Mode 1: 10,500 Mode 2: 18,000 22,500
Dimensions (L x W x H)	460 x 575 x 585 mm (18-1/8 x 22-5/8 x 23")	
Net Weight (with battery)	16.5 - 18.6 kg (36.4 - 41.0 lbs)	
Continuous Usage Time (approx.)	45 - 140 min with PDC1200 cruise control lever	

Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

12 MONTHS WARRANTY



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448 03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900


Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

www.makita.my
makita@makita.my



Battery Powered Backpack Blower UB004C Portable Power Pack PDC1500

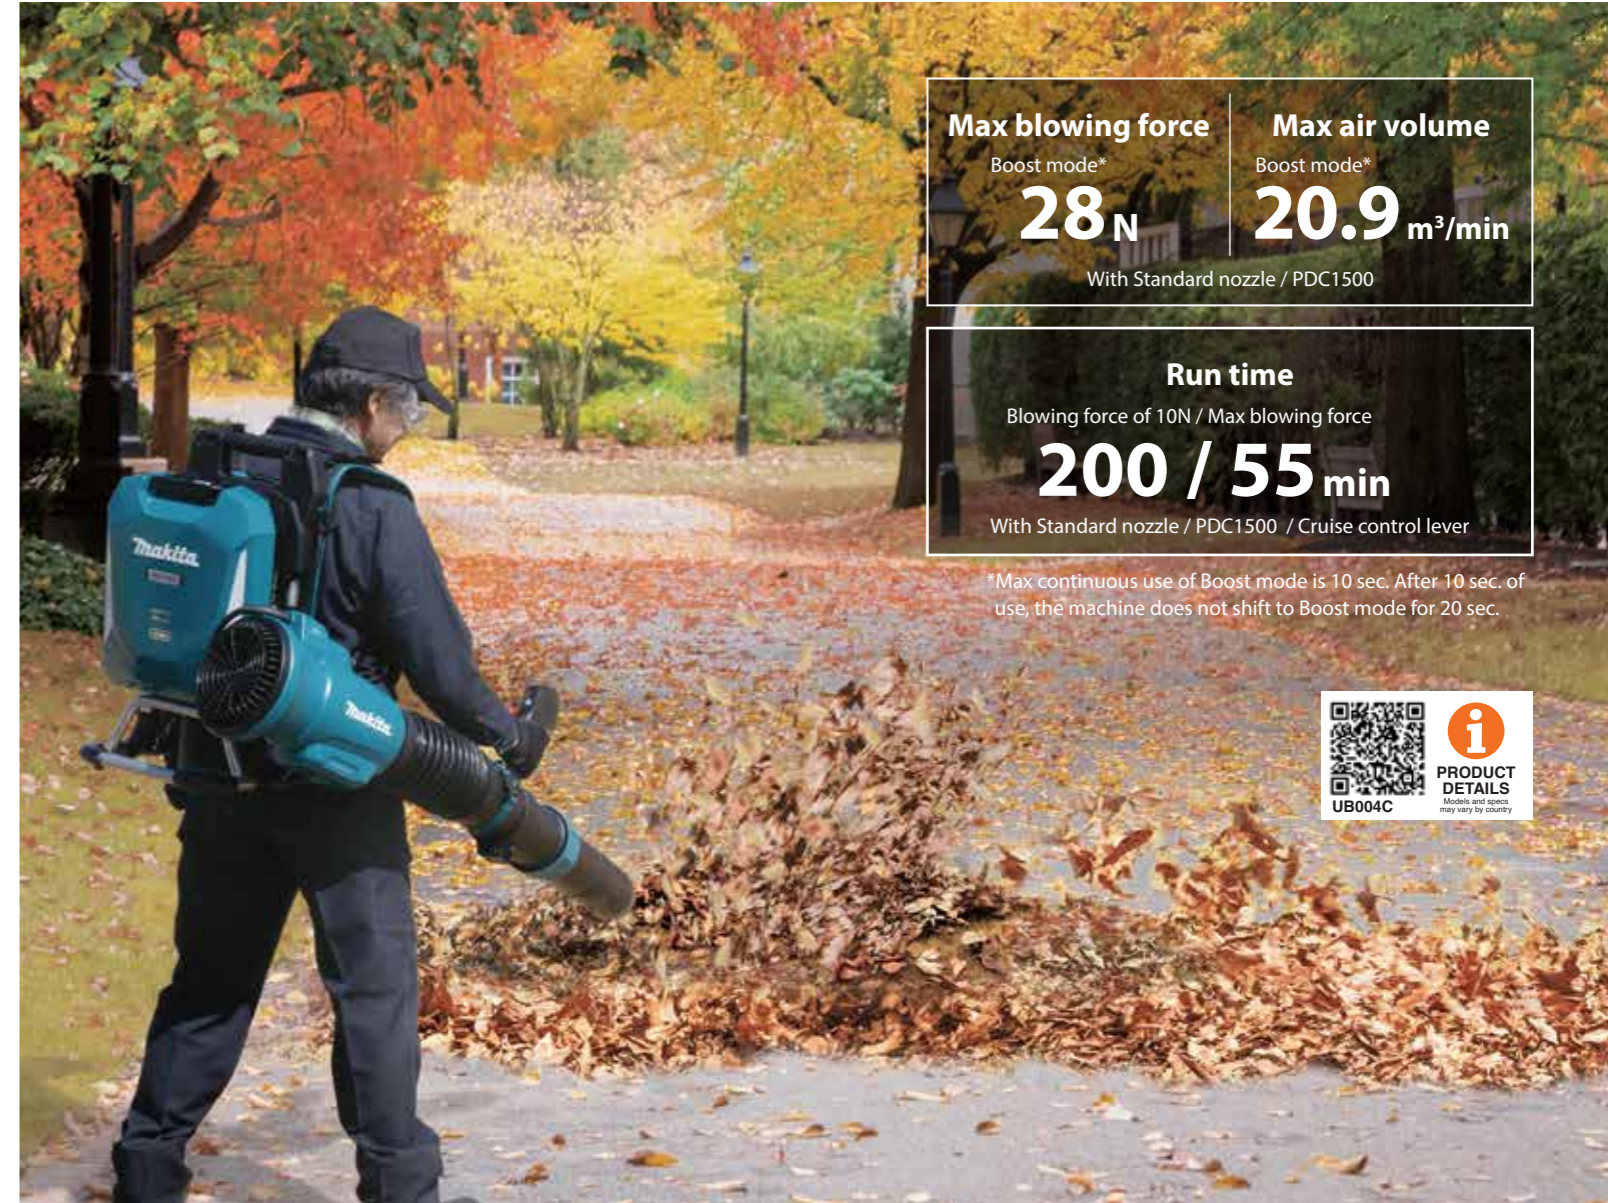

Max blowing force

Boost mode*

28 N

Max air volume

Boost mode*

20.9 m³/min

With Standard nozzle / PDC1500

Run time

Blowing force of 10N / Max blowing force

200 / 55 min

With Standard nozzle / PDC1500 / Cruise control lever

*Max continuous use of Boost mode is 10 sec. After 10 sec. of use, the machine does not shift to Boost mode for 20 sec.



PRODUCT
DETAILS
Models and specs
may vary by country

With End nozzle 74



With Flat nozzle





High blowing force of 25N and Max blowing force of 28N in Boost mode (with a time limit)



High power

The airflow path from Fan has been changed from a curved line in Predecessor model to a straight line, increasing blowing efficiency by approx 10%.



Max blowing force
Boost mode*

28 N

Max air volume
Boost mode*

20.9 m³/min

Max air velocity
Boost mode*

80.7 m/s

With Standard nozzle / PDC1500

*Max continuous use of Boost mode is 10 sec. After 10 sec. of use, the machine does not shift to Boost mode for 20 sec.



Connector

High blower performance similar to 65 cm³ class engine backpack blower

1,500Wh high capacity

Portable Power Pack
PDC1500

Quick removal/attachment

allows for the battery to be easily removed or attached to the main unit.



Reflectors

keep operator visible from a distance even in the dark.



4-LED fuel gauge

indicates the battery status by four green LEDs.



XPT

eXtreme Protection Technology / IPX4 compatible

High water-resistance allows to operate the machine even if it is wet with water.



Improvements for more comfortable backpacking experience

- Redesigned backpack harness section for more comfortable backpacking experience
- Mesh fabric for belts for improved breathability
- Shoulder belt material and shape have been redesigned to reduce the stress on user's shoulders



Variable speed control by trigger + Cruise control lever

- Trigger can be fixed at a desired position by user
- The machine can shift to Boost mode by pulling Trigger fully from the position where Trigger stops in the halfway position



Position-adjustable grip

The grip position is adjustable forward/backward and left/right to suit user's size or work posture

