


Also available
Concrete Vibrator series

VR001G Tool only
without Flexible shaft
Flexible shafts from ø28 to ø38
are suitable for a wide range of
jobsites



Accessories (optional)

Screed Blade

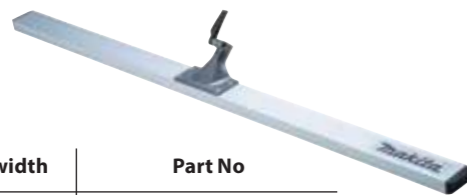

	Working width	Part No
Blade 900	900mm	1917D5-2
Blade 1400	1,400mm	1917D4-4
Blade 1800	1,800mm	1917D3-6

Battery case



	Compatible battery	Part No
Battery case L set	BL4050F / BL4080F / BL4080H	1910J1-0

VL001GZ

Cordless Screed

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah
(5.0Ah, 8.0Ah & 8.0Ah (H) only applicable
with battery case L set)



Vibrations Per Minute (VPM)	11,000
Dimensions (L x W x H)	1,562 x 935 / 1,435 / 1,836 x 258 mm (61-1/2 x 36-3/4 / 56-1/2 / 72-1/4 x 10-1/8")
Net Weight	5.3 kg (11.7 lbs)
Continuous Usage Time (approx.)	150 min with BL4040F Blade 1800 mm



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 3824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Roamerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279


FOLLOW MAKITA MALAYSIA:



www.makita.my

**Excellent maneuverability
for efficient concrete finishing**

Covers large work areas

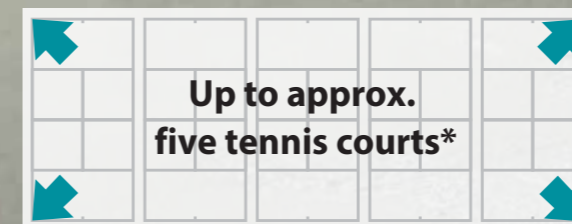

Up to approx.
five tennis courts*

* When screeding at approx. 10 seconds per meter,
with 1,400 mm blade and BL4040 battery

Runtime¹

With BL4040F, Blade1800

About **150 min**

¹ On a full battery charge

Lightweight
at 6.2 kg
With BL4040F,
Blade 1800



Three screed blade lengths for a wide range of job sites and applications

Screed Blades (Optional accessory)

	Working width
Blade 900	900mm
Blade 1400	1,400mm
Blade 1800	1,800mm



Powerful, stable vibration

Vibrations per minute:


11,000 VPM

High-power brushless motor



Constant speed control

maintains stable vibration at low battery levels

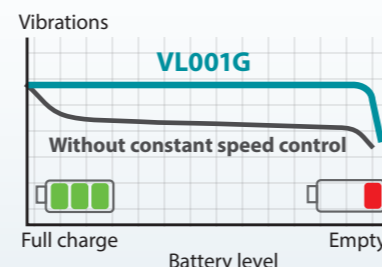

Tool-less installation and removal

Simply insert the shaft tip into the blade, then turn the lock lever.



Three blade options to suit different site sizes and applications, from exterior concrete work to residential foundations.

(Optional accessory)



Large work area

Working width
1,800
mm

Working width
1,400
mm

Working width
900
mm

Small work area



Lightweight

at **6.2** kg

With BL4040F,
Blade 1800

Designed to reduce operator fatigue and strain.

Vibration level

8.6 m/s²

Long rubber grip

The wide rubber grip helps reduce vibration transmitted to the hands, even when the operator changes grip positions to suit the task.



Concrete placement process (example)



Unloading fresh concrete



Spreading the concrete



Compacting with a vibrator



Leveling with the screed



Surface finishing



Completed after curing

Reduces uneven concrete strength and cracking


The vibrating blade settles the aggregate and brings cement paste evenly to the surface, helping minimize variations in strength and reduce cracking.

Brings cement paste evenly to the surface

Settles the aggregate

After leveling

Before leveling

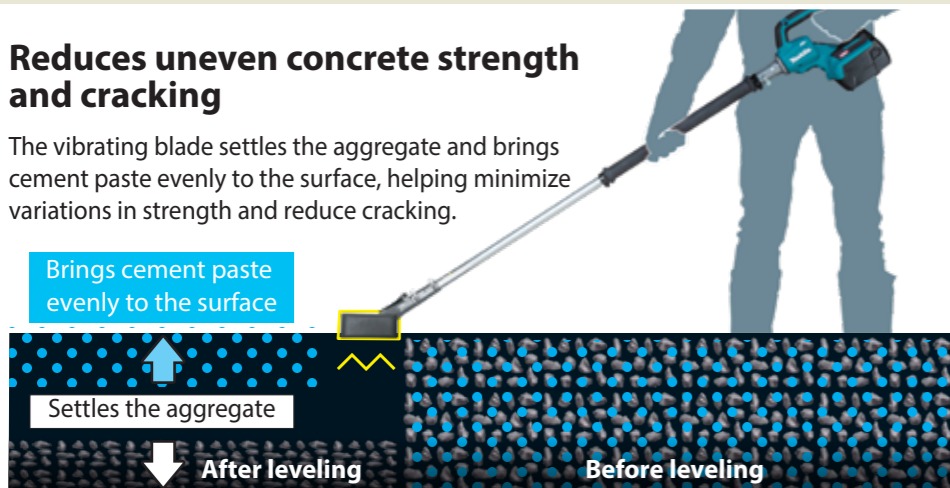

The blade is washable.



Protection against concrete intrusion



Battery cover

Trigger
Lock-on button
Switch cover

Low battery indicator



Compact loading

The tool body and blade can be easily attached and removed without tools for space-saving loading and transport.



Water-resistance compatible with XPT



(eXtreme Protection Technology)

