



# Cordless Worklight ML009G



Powered by:

- 40Vmax XGT Li-Ion battery
- 18V LXT Li-Ion battery  
(two in parallel or one)



40Vmax



18V



40Vmax 18V



ML009G



PRODUCT  
DETAILS

Models and specs  
may vary by country



Luminous flux  
**10,000 lm**  
Max.



**Luminous flux**  
**10,000 lm**  
 Max.

**IP65 certified**  
 dust and  
 water  
 resistance




**Battery capacity warning function**

Automatically notifies the user about a decrease in battery capacity with a reduction in illuminance



**Carrying handle**

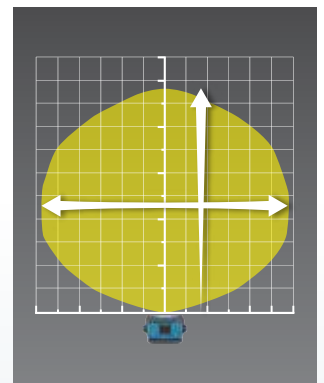

**3 brightness settings**

with memory function that remembers the brightness setting last time you power off



**High:**  
 10,000 lm



**Medium:**  
 4,000 lm



**Low:**  
 2,000 lm



**Angle adjustment**

Knob for free adjustment of light angle enables the light source to rotate from -30° to 210° to a desired angle

**Distance**

**Front:** 9.7 m (approx.)

**Side:** 11.4 m (approx.)

**ML009GX**

**Cordless Worklight**

• LED color is daylight white, which is similar to the natural light and ideal for working spaces



**40Vmax**  
**18V**



Standard Equipment:  
 Anti-glare Film

• Without Charger & Battery

<b>Luminous Flux</b>	High: 10,000lm   Mid: 4,000lm Low: 2,000lm
<b>illuminance</b>	at 1 m from the light source: High: 4,300   Mid: 1,900   Low: 1,000 lx at 3 m from the light source: High: 500   Mid: 230   Low: 110 lx at 5 m from the light source: High: 150   Mid: 75   Low: 55 lx
<b>Dimensions (L x W x H)</b>	248x386x305mm (9-3/4x15-1/4x12")
<b>Net Weight</b>	6.4 - 9.9kg (14.1 - 21.8lbs.)
<b>Continuous Usage Time (approx.)</b>	Low: 14 hrs   Mid: 6.5 hrs   High: 2.4 hrs with BL4040 x2

Like us on Facebook  
**MAKITA MALAYSIA**

\*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



**Makita Power Tools (Malaysia) Sdn. Bhd.** Co. Registration No.: 201301001778 (1031615-M)

**HQ & Service Centre**  
 Lot 824, Jalan Subang 5, Subang Industrial Area,  
 47500 Subang Jaya, Selangor  
 Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
 03-8022 1443 (Service)

**Johor (Johor Bahru) Service Centre**  
 No.12 & 14, Jalan Rosmerah 2/9,  
 Taman Johor Jaya,  
 81100 Johor Bahru, Johor.  
 Tel: 07-364 9406 | Fax: 07-364 9407

**Sarawak (Kuching) Service Centre**  
 Lot 1227, Lorong Demak Indah 2A,  
 Demak Laut Industrial Area, Phase 2A,  
 93050 Kuching Sarawak.  
 Tel: 082-496 800 | Fax: 082-496 900

**Sabah (Kota Kinabalu) Service Centre**  
 Lot 19, Jalan Buah Duku,  
 Kolombong Light Industrial Estate, Off Jalan Kolombong,  
 Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
 Tel: 088-388 278 | Fax: 088-388 279



[www.makita.my](http://www.makita.my)  
 ✉ makita@makita.my