



Cordless Driver Drill  
Cordless Hammer Driver Drill



**40V** Li-Ion  
**max**



DF003G



PRODUCT  
DETAILS

Models and specs  
may vary by country



HP003G



PRODUCT  
DETAILS

Models and specs  
may vary by country

## Enhanced efficiency in heavy-duty tasks with three-speed modes

Work efficiency  
increased by

about **2 times\***  
(Medium speed mode)



Cordless Driver Drill  
**DF003G**  
13 mm (1/2")



Cordless  
Hammer Driver Drill  
**HP003G**  
13 mm (1/2")

\*SPAX screw driving (ø8 x 400 mm) into Douglas Fir  
Compared to our previous model



# Max. torque 180 N·m



SPAX screw driving (ø8 x 400 mm) into Douglas Fir  
With BL4040F battery

**HP/DF003G**  
\* Medium speed mode


**210**

Our previous model **100**  
\* Low speed mode

Slow Drilling speed Fast

## High-speed rotation at 2,400 min<sup>-1</sup>

Three-speed modes: Adjustable according to the task and material

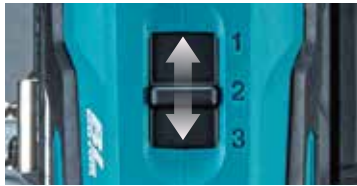

Smooth switching with a distinct click

Rotation speed (min <sup>-1</sup> )	
Low	0 - 650
Medium	0 - 1,800
High	0 - 2,400

## 4-LED job light

Positioned below the grip for wide coverage




High brightness / Wide area

About 1-hour runtime in light mode

## 41 electronic clutch settings in low mode

For precise fastening in a variety of applications



Easy jog dial adjustment with digital display

## AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.

Automatically stops



## Soft start (in Low-speed mode)

Reduces kickback when starting with high-inertia bits

**XPT**

## High water-resistance

### DF003GZ 20 mm (13/16")

#### Cordless Driver Drill

40Vmax



\*Recommended batteries 4.0Ah (F), 5.0Ah



Standard Equipment:  
Belt Clip, Screw, Bit,  
Bit Holder, Grip Assembly

\* GZ: Without Charger & Battery



**BL MOTOR XPT AFT**

Capacity	Steel: 20 mm (13/16")   Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 92 mm (3-5/8") Wood (Hole Saw): 152 mm (6") Siding Board: 220 mm (8-5/8") 13 mm (1/2")
----------	---

Chuck Capacity	13 mm (1/2")
----------------	--------------

No Load Speed (RPM)	High: 0 - 2,400   Low: 0 - 650
---------------------	--------------------------------

Max Fastening Torque	Hard: 150 N·m (1,330 in lbs) Soft (Low): 88 N·m (780 in lbs)
----------------------	---

Max Torque	180 N·m (1,590 in lbs)
------------	------------------------

Dimensions (L x W x H)	196 x 86 x 284 mm (7-3/4 x 3-3/8 x 11-1/8")
------------------------	--

Net Weight	2.8 - 4.0 kg (6.2 - 8.8 lbs)
------------	------------------------------

Work Amount (approx.)	180 holes with BL4040F Drilled 30 mm thick Douglas-fir with Ø 65 mm self-feeding bit (high speed)
-----------------------	---

### HP003GZ 20 mm (13/16")

#### Cordless Hammer Driver Drill

40Vmax



\*Recommended batteries 4.0Ah (F), 5.0Ah



Standard Equipment:  
Depth Gauge, Belt Clip, Screw,  
Bit, Bit Holder, Grip Assembly

\* GZ: Without Charger & Battery



**BL MOTOR XPT AFT**

Capacity	Steel: 20 mm (13/16")   Wood (Auger Bit): 50 mm (2") Wood (Hole Saw): 152 mm (6")   Masonry: 20 mm (13/16") 13 mm (1/2")
----------	--

Chuck Capacity	13 mm (1/2")
----------------	--------------

Impacts Per Minute (IPM)	High: 0 - 36,000   Med: 0 - 27,000   Low: 0 - 9,750
--------------------------	---

No Load Speed (RPM)	High: 0 - 2,400   Med: 0 - 1,800   Low: 0 - 650
---------------------	---

Max Fastening Torque	Hard: 150 N·m (1,330 in lbs)   Soft: 28 N·m (250 in lbs)
----------------------	--

Max Torque	180 N·m (1,590 in lbs)
------------	------------------------

Clutch Torque Setting	High: 25   Med: 30   Low: 41
-----------------------	------------------------------

Dimensions (L x W x H)	197 x 86 x 284 mm (7-3/4 x 3-3/8 x 11-1/8")
------------------------	--

Net Weight	2.8 - 4.0 kg (6.2 - 8.8 lbs)
------------	------------------------------

Work Amount (approx.)	180 holes with BL4040F Drilled 30 mm thick Douglas-fir with Ø 65 mm self-feeding bit (high speed)
-----------------------	---

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

#### HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,  
47500 Subang Jaya, Selangor.  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

#### Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,  
Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07-364 9406 | Fax: 07-364 9407

#### Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,  
Demak Laut Industrial Area, Phase 2A,  
93050 Kuching Sarawak.  
Tel: 082-496 800 | Fax: 082-496 900

#### Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,  
Kolombong Light Industrial Estate, Off Jalan Kolombong,  
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my