



Cordless Tower Light ML014G



40V LXT max

18V LITHIUM-ION

Max. luminous flux 15,000 lm




PRODUCT
DETAILS
Models and specs
may vary by country

ML014G



For lighting at worksites
without a power source

Continuous use (approx)	at Min luminous flux	at Max luminous flux
with BL4080F + BL18120	48 h	3.6 h
with BL4080F	28 h	2 h
with BL18120	20 h	1.6 h

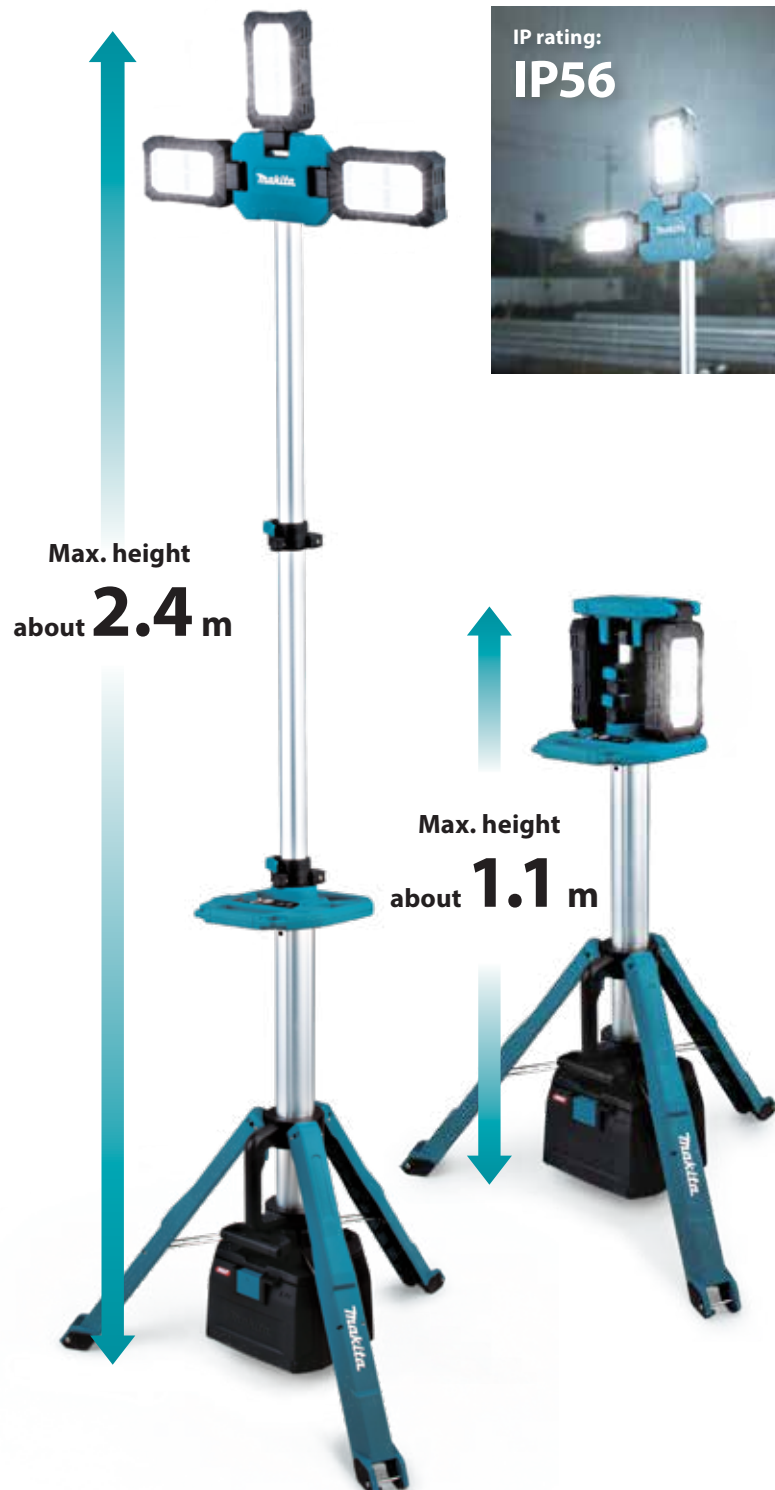

IP rating:
IP56

Max. height
about **2.4 m**

Max. height
about **1.1 m**


Adjustable light angle

The light angle is easily adjustable to suit your application, providing optimal illumination.

**The light head rotates 180°
Vertically**




Horizontally

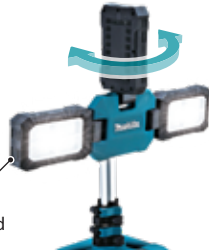

**Light base rotates 180°
Vertically**



Illumination range (Single-sided)

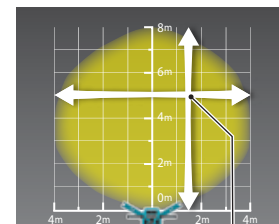

**Forward Direction
about 8 m**

With soft-start illumination



Downward



Single-sided



360°



Excellent portability

Lightweight Body &
Integrated Tripod

Lightweight
9.5 kg (tool only)

Height
(folded)
about 1 m



Manually adjustable height

The setup height of light head can be adjusted
from 1,085 to 2,430mm.



Easy tripod setup by slide handle



Brightness adjustment dial

(Stepless: 1,100 - 15,000lm)



Power button

**Battery capacity
warning lamp**

Desired battery can be discharged first.
(by pressing and holding the power button).

Battery: 40Vmax/ 18V LXT



Upto two battery can be installed:

- Only one XGT or 18V LXT
- Two; One XGT and One 18V LXT in parallel connection

Anti-Tipping Design

To prevent accidental tipping, the
tripod can be secured to ground
with hook stakes.
(Use commercially available hook
stakes.)



ML014G

Cordless Tower Light

40Vmax

18V



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah,
4.0Ah (F), 5.0Ah,
8.0Ah, 8.0Ah (H)



Standard Equipment:
Shoulder Belt

• Without Charger & Battery



Luminous Flux	1,100 - 15,000 lm
illuminance	at 1 m from the light source: 400 - 5,000 lx at 5 m from the light source: 16 - 200 lx
LED Type	Color: Daylight white Color temperature: 5,000 K
Brightness Setting	Stepless (Dial)
Dimensions (L x W x H)	Folded position : 290 x 265 x 1,035 mm (11-3/8 x 10-3/8 x 40-3/4") Extended position : 780 x 680 x 1,085 - 2,430 mm (30-3/4 x 26-3/4 x 42-3/4 - 95-1/2")
Net Weight	12.8 kg (28.2 lbs.)
Continuous Usage Time (approx.)	3.6 - 48 hrs with BL4080F + BL18120

