



Accessories (optional)

Trimmer Head
Part No. 1911Y3-7

Cord/Line: 2.7mm
Ref.: 121SP
Spline-engaged with the sleeve of Cutter shaft



Shoulder strap assembly



Four-leaf Spiral Nylon cord

Red

Size	Part No.
2.7mm x 15m	E-01828



UR014GZ

Cordless Grass Trimmer

• High output power equivalent to that of 35 cc class engine models.



40Vmax Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
Nylon Cutting Head, Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt

• GZ: Without Charger & Battery



Cutting Width	Nylon cutting head: 450 mm (17-3/4")
No Load Speed (RPM)	4,000 - 5,000
Spindle Size	M10 x 1.25LH
Dimensions (L x W x H)	1,890 x 330 x 304 mm (74-1/2 x 13x12")
Net Weight	5.5 - 6.7 kg (12.1 - 14.8 lbs)
Continuous Usage Time (approx.)	18 min with BL4050F at normal mode low speed

Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

12 MONTHS WARRANTY

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448 03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
✉ makita@makita.my



Max Output
1.5 kW (with BL4080F)



High power as 35cc engine tool



UR014G
Loop-Handle
Exclusively for use with nylon cutting head

Trigger switch

High output power



BL MOTOR

Max Output
1.5 kW
(with BL4080F)

High-torque mode

- Applicable to heavy duty operation.
- Recommended for heavy-duty operation where particularly high torque is required, such as shredding operation.

Low noise

Model UR014G (w/ Nylon cutting head) **93 dB(A)**

Guaranteed value according to European Outdoor Noise Directive 2000/14/EC (with the blade which generates the highest noise levels)

Run Time

Model UR014G **51-18 min**
Low speed - Max. speed

with Nylon cutting head and BL4050F on a single full battery charge / No load

IPX4-compatible



Enhanced Dust and Drip-proof Performance

Rigid ø25.4mm shaft pipe

ensures high rigidity equivalent to that of 35 mL class


Compatible with ø450mm Nylon cutting head



AFT

Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

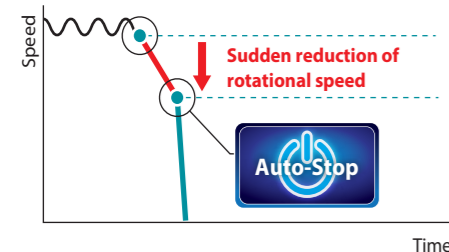

UR014G only

Reverse rotation mode



Indication of Reverse rotation function

- Counterclockwise blade rotation/ Clockwise blade rotation can be selected to suit the user's preferences or needs; for example, when he/she desires to control the scattering direction of grass clippings in such an operation as cutting a lawn beside driveway (with memory function).
- Press and hold the mode selection button for Counterclockwise blade rotation/ Clockwise blade rotation (with memory function).

Counterclockwise blade rotation



By trimming Counterclockwise

Clockwise blade rotation



By trimming Clockwise