


**High Power  
Durability  
Digital  
Communication**



**Cordless Backpack Mist Blower  
PM001G**

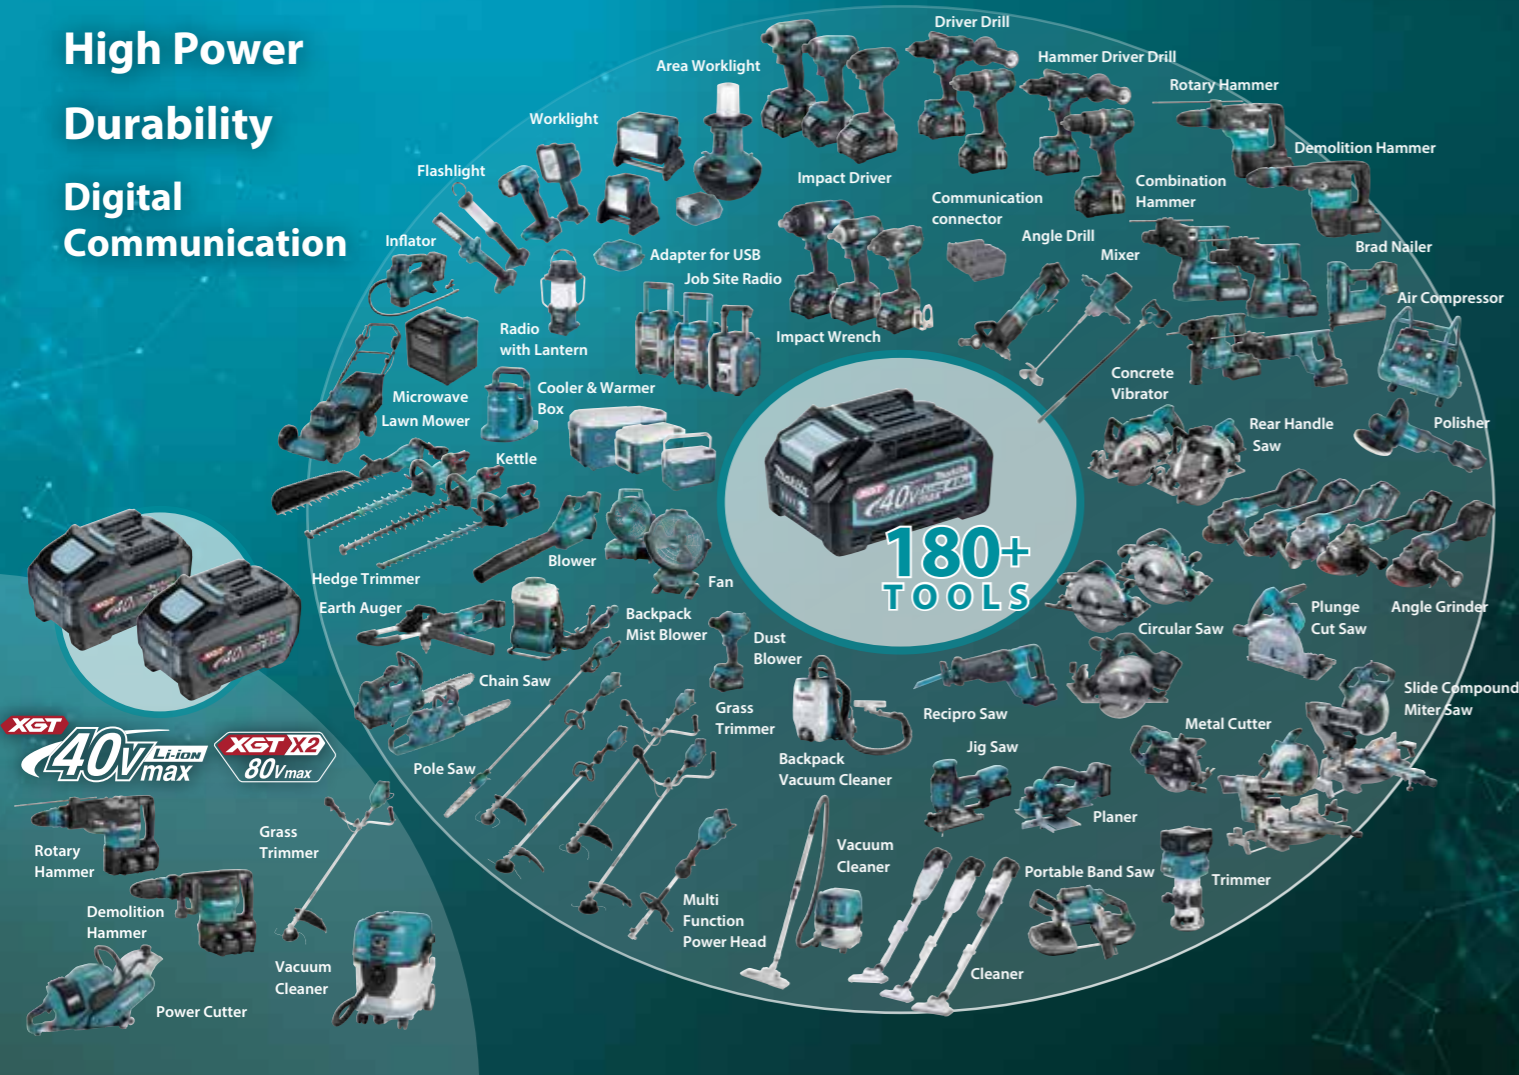

**XGT  
40V L<sup>ION</sup>  
max**



**Accessories (optional)**

**Diffusion cover**

Part No. 453506-1



**Deflector cover**

Part No. 198248-7 / 198249-5



**Band 25 set**

Part No. 196733-4



**PM001GZ**

**Cordless Backpack  
Mist Blower**

• Long max spray range,  
sufficient spray distance even  
in outdoor spraying operation,  
close to that engine model.



**40Vmax** \*Recommended batteries  
4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:  
Diffusion cover, Wrench, Nozzle

• GZ: Without Charger & Battery



Chemical Tank Capacity	15.0 L (507 oz)
Max Air Volume	High : 8.6-14.3 m <sup>3</sup> /min Med : 8.0-11.0 m <sup>3</sup> /min Low : 7.4-9.0 m <sup>3</sup> /min
Max Air Velocity	High : 39.5-64.0 m/s Med : 36.5-52.0 m/s Low : 34.0-42.0 m/s
Dimensions (L x W x H)	320 x 600 x 690 mm (without Nozzle) (12-5/8 x 23-5/8 x 27-1/4")
Net Weight	13.2 - 15.7 kg (29.1 - 34.6 lbs)
Continuous Usage Time (approx.)	22 min with BL4080F x2 High spraying speed mode

Like us on Facebook  
**MAKITA MALAYSIA**

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

**Makita Power Tools (Malaysia) Sdn. Bhd.** Co. Registration No.: 201301001778 (1031615-M)

**HQ & Service Centre**  
Lot 824, Jalan Subang 5, Subang Industrial Area,  
47500 Subang Jaya, Selangor.  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

**Johor (Johor Bahru) Service Centre**  
No.12 & 14, Jalan Rosmerah 2/9,  
Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07-364 9406 | Fax: 07-364 9407

**Sarawak (Kuching) Service Centre**  
Lot 1227, Lorong Demak Indah 2A,  
Taman Johor Jaya,  
93050 Kuching Sarawak.  
Tel: 082-496 800 | Fax: 082-496 900

**Sabah (Kota Kinabalu) Service Centre**  
Lot 19, Jalan Buah Duku,  
Kolombong Light Industrial Estate, Off Jalan Kolombong,  
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
Tel: 088-388 278 | Fax: 088-388 279



[www.makita.my](http://www.makita.my)  
makita@makita.my

**Solution tank  
capacity**

**15 L**

**Max spray range**  
High spraying speed mode

**14 m**  
(horizontal)

**Continuous run time**  
on a full battery charge  
High spraying speed mode

**22 min**  
Battery: BL4080F x2

**Average particle size**  
High spraying speed mode

**50/150 µm**  
ULV nozzle/Standard nozzle





### Switch Interlocking Valve

The opening/closing operation of the solution supply valve is interlocked with the switch trigger to suppress dripping of solution.

### Max spray distance: 14m



### 3 spraying speed modes



- Selectable with the button on control handle
- With mode memory function (In the next operation, the machine will resume operation in the same mode as last time user turn off.)

High spraying speed mode	Long distance spraying allows for outdoor operation.
Medium spraying speed/Low spraying speed mode	For indoor operation or runtime-oriented operation

### ULV compatibility

- Compatible with ULV (Ultra Low Volume) spray for pesticides, etc.
- Only available in High spraying speed mode

Nozzle type	Average particle size
ULV nozzle	50µm
Standard nozzle	150µm

### Powered by 40Vmax XGT Li-Ion battery (two in parallel or one)



### Automatic battery switching

If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to use the other one.

Continuous run time on a full battery charge  
High spraying speed mode

**22 min**

Battery: BL4080F x2

### A variety of front covers

**Diffusion cover**  
You can diffuse the mist by attaching the diffusion cover to the end nozzle



**Deflector set (Option)**  
You can discharge the mist upward or downward by attaching the deflector to the end nozzle



Spray amount adjusting dial



Variable grip



Variable speed trigger



Tank filter port diameter: 0.5mm (max)