

High Power
Durability
Digital Communication



XGT
40V Li-ion max **XGT X2**
80V max



Accessories (optional)

Multi adapter set

Part No. 1913F5-2

- MAKPAC (all types) can be installed, which is also convenient for storing cleaning accessories.
- Portable power pack PDC01 / PDC1200 can be installed to improve run time.



Dust bag set

Part No. 1913F7-8

- Capacity: 47L (12.4 gal)
- Dust bag suitable for collecting bulky waste such as fallen leaves.
- Dust bag can be reused.



VS001GZ

Cordless Vacuum Sweeper

- Designed mainly for use in construction sites or outdoor commercial facilities, featuring high cleaning performance.



Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0
*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F),
5.0Ah, 8.0Ah
40Vmax



Dust Container Capacity	24 L (6.3 gal)
Cleaning Width	Main brush: 480 mm (18-7/8")
Filter Cleaning Function	YES (Electric)
Dimensions (L x W x H)	Handle in upright position: 830 x 677 x 1,146 mm (32-3/4 x 26-3/4 x 45") Handle in retracted position: 830 x 677 x 467 mm (32-3/4 x 26-3/4 x 18-3/8")
Net Weight (with battery)	29.9 - 33.1 kg (65.9 - 73.0 lbs)
Continuous Usage Time (approx.)	480 min - quiet mode 200 min - standard mode with BL4080F x2



Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No. 12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my

Dust pickup rate
about **90%**

- Suction mode: Standard
- Brush rotation speed: Standard
- Value when the side brush is off
- Floor type: Hard floor
- Dust type: Cement powder (particle size: approx 10µm)
- Dust volume: Spreading density: 250 g/m²
- Sweeper travel distance: 700mm



VS001G

PRODUCT
DETAILS
Models and specs
may vary by country

Cleaning width
with Side brush
650 mm




Capable of cleaning dust or waste of all sizes

Two Main brushes located on the bottom of the machine enable cleaning of small dust particles as well as large debris such as 500ml-size PET bottles.

Dust collection function

Reduces flying-up dust captured by the brushes.

Dust container capacity
24L

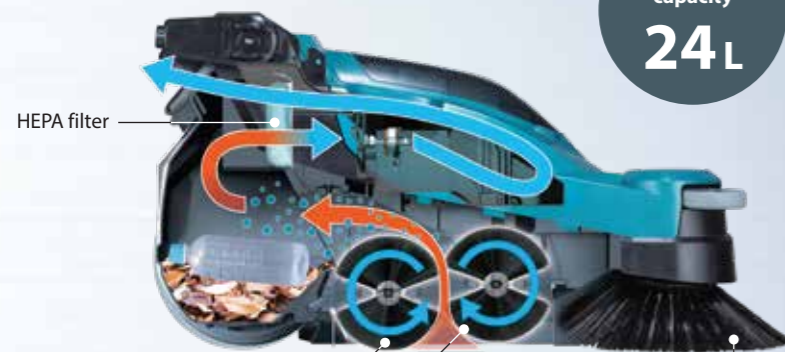

Two Main brushes (Electric)

- Two Main brushes are located on the bottom of the machine.
- Height adjustable
- Toolless replacement

Side brush (Electric)

- Side brush on the right side of the machine allows user to clean up the edge of the walls.
- Toolless replacement
- Interlocked with rotation of Main brush
- Height of Side brush can be adjusted.

Excellent transportability and maneuverability

- By reducing the weight of the machine, the transportation burden is reduced.
- The cleaning width is limited to the width of a typical door (800mm or less) for easy maneuverability in the field.

Net weight

29.9 - 33.1 kg

(BL4025F x1) (BL4080F x2)

Powerful cleaning with three motors

BL *
MOTOR

- For filter cleaning
- For dust collection
- For Main brushes and Side brush



*Only motors for dust collection and Main/Side brushes are BL motors.





Excellent operating section

Control switches and indicators are located on the control panel of the handle.



- Main power on/ off button
- Suction mode selection button (Standard/ Quiet/ Off)
- Main brush speed selection button (Standard/ Quiet)
- LED job light button (On/ Off)
- Filter cleaning button (On/ Off)

Switchable brush rotation speed (Main brush / Side brush)




Rotation speed of Main brush/ Side brush can be switched (standard/ quiet) according to the work environment.

Standard mode: For sweeping a large amount of dust and waste

Quiet mode: For cleaning places where quietness is expected such as indoor areas, or a small amount of dust and waste



Main brush height adjustment dial
Adjustment range: approx 20mm



Side brush On/ Off lever
Side brush height adjustment dial
Adjustment range: approx 15mm

Filter cleaning mechanism (Electric)



The filter vibrates to remove dust adhering to the filter, reducing clogging.

HEPA filter

Excellent storage capability

Handle can be folded to stand the machine upright for compact storage.



XPT eXtreme Protection Technology IPX4-rated water-resistance



LED job light

Illuminates the front of the machine, allowing user to check for dust or obstacles even in dark places such as warehouses.



Multi adapter (Optional accessory) Portable power pack MAKPAC



40Vmax XGT battery (two in parallel or one)



Carry handle
Equipped with a carry handle for easy carrying

