

Accessories (optional)

Glass protection nozzle

Part No. PR0000028

Ideal for drying putty while protecting glass, and protecting windows when stripping frames



Wide-slot nozzle

Part No. PR0000029

Ideal for applications such as PVC packing



Reflector nozzle

Part No. PR0000030

Ideal for soldering and shrink fitting plastic soldering sleeves, and bending plastic welding rods



Reduction nozzle 20mm

Part No. PR0000031

Provides concentrated heating over a small area



Overlap welding nozzle

Part No. PR0000032

For patching a vinyl sheet with the optional pressure roller



Solder sleeves reflector

Part No. PR0000033

Ideal for heating heat shrink tubing



Welding nozzle

Part No. PR0000034

Ideal for placing an accurate heat beam



Pressure roller

Part No. PR0000035

Ideal for securing material while being heated



Speed welding nozzle

Part No. PR0000039

Conveniently holds a plastic welding rod while speed welding (welding rod not included)



Scraper

Part No. PR0000040

Ideal for stripping paint and varnish



Scraper set


Part No. PR0000041

Ideal for stripping paint and varnish



Welding rods

Part No. ABS: PR0000036
HDPE: PR0000037
PP: PR0000038



Cordless Heat Gun Series

DHG181



Air volume	70/110 L/min
Air temperature	Up to 550 °C

DHG180



Air volume	110 L/min
Air temperature	Up to 550 °C



HG001GZ02

Cordless Heat Gun

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F) 5.0Ah, 8.0Ah



Air Temperature (°C)	Ambient temperature (blowing) up to 600 °C (1,112.0 °F)
Air Flow	Stage 1: 120 L/min Stage 2: 150 L/min Stage 3: 180 L/min Stage 4: 200 L/min
Dimensions (L x W x H)	191 x 86 x 272 mm (7-1/2 x 3-3/8 x 10-3/4")
Net Weight	1.5 - 2.7 kg (3.3 - 6.0 lbs)
Continuous Usage Time (approx.)	14 min with BL4040 600°C at full speed

Standard Equipment:
Reduction Nozzle, Glass Protection Nozzle,
Reflector Nozzle, Wide Slot Nozzle

* GZ02: 1x Makpac Connector Box Type 3,
Without Charger & Battery



Like us on Facebook
MAKITA MALAYSIA

*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my

Makita Cordless Heat Gun
HG001G



Maximum air volume
200 L/min

Maximum temperature
600 °C

For installing vehicle wrap films

For connecting hoses





For applying adhesive vinyl sheets



For heating and shrinking heat-shrink tubing

Delivers excellent efficiency for demanding tasks

Maximum temperature


600°C

*Compared to our 18V models

Maximum air volume

200 L/min

*Compared to our 18V models

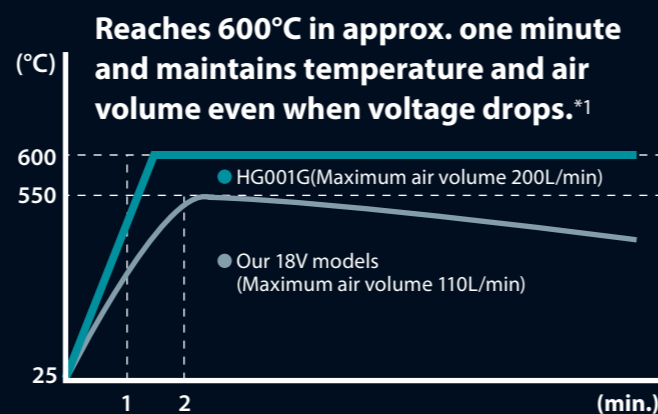

*1 Time to reach 600°C may vary depending on ambient temperature and battery condition.

LCD screen with backlight



- Memory function: Remembers the last used temperature and air volume settings.
- Maximum temperature control function

Temperature adjustment*2

COOL mode (fan only) and heating range from 50°C to 600°C.



*2 Actual temperature at the nozzle tip may vary depending on the working environment and usage conditions.

Air volume adjustment

Switchable in four steps.

1	120L/min	2	150L/min
3	180L/min	4	200L/min

Standard nozzles



Wide-slot nozzle
Ideal for applications such as PVC packing.



Glass protection nozzle
Ideal for drying putty while protecting glass, and protecting windows when stripping frames.



Reflector nozzle
Ideal for soldering and shrink fitting plastic soldering sleeves, and bending plastic welding rods.



Reduction nozzle 20mm
Provides concentrated heating over a small area.

Nozzle quick release

The quick-release mechanism allows tool-free nozzle removal without touching hot metal parts.



LCD display



Lock-off lever
Switch trigger

Hook



Lock-on button

Can be placed vertically



LED job light

