

High Power
Durability
Digital
Communication



40Vmax Li-ion **XGT X2** 80Vmax



180+ TOOLS



Cordless Power Cutter
CE002G 355 mm (14") Dry
CE001G 355 mm (14") Dry & Wet



40Vmax + **40Vmax**

Accessories (optional)

Diamond wheel for concrete
Segmented type 355 x 25.4
Part No.
Dry *D-56998 (EN)
Dry & Wet E-12996 (EN)
*Laser Welding



Abrasive cut-off wheel for Metal CE001G only
355 x 4.3 x 25.4 A24T
5per set
Part No.
E-12790-5



Wireless unit set
CE002G only
Part No.
199393-1



CE002GZ 355 mm (14")

Cordless Power Cutter

• Max cutting depth: 127mm (5"); 8-10 rebars of Ø16 mm (#5) can be cut together in one shot
• Dry cutting model designed to allow for use with vacuum cleaner.



40Vmax x2 Recommended batteries 4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries



Standard Equipment:
Ring Set, Box Wrench 13-19,
Laser Diamond Wheel Segmented (D-56998)

• GZ: Without Charger & Battery



CE001GZ01 355 mm (14")

Cordless Power Cutter

• WetGuard/IPX4-compatible; High water-resistance allows to operate the machine even if it is wet with water.



40Vmax x2 Recommended batteries 4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries



Standard Equipment:
Diamond Wheel (E-12996),
Wrench, Coupling Sleeve, Ring

• GZ01: Without Charger & Battery



Wheel Diameter	355 mm (14")
Max Cutting Capacity	127 mm (5")
No Load Speed (RPM)	4,200
Max Output	4,000 W
Dimensions (L x W x H)	825 x 272 x 487 mm (32-1/2 x 10-3/4 x 19-1/4")
Net Weight	13.1 - 15.1 kg (28.9 - 33.3 lbs)
Continuous Usage Time (approx.)	27 cuts with BL4080F x2 50 mm depth x 300 mm width with diamond wheel

Wheel Diameter	355 mm (14")
Wheel Hole Diameter	25.4 mm (1")
Max Wheel Thickness	5.0 mm (3/16")
Min Wheel Thickness	2.0 mm (5/64")
Max Cutting Capacity	127 mm (5")
No Load Speed (RPM)	5,300
Dimensions (L x W x H)	786 x 272 x 433 mm (31 x 10-3/4 x 17")
Net Weight	12.3 - 14.1 kg (27.1 - 31.1 lbs)
Work Amount (approx.)	18 cuts with BL4050F x2, Concrete cutting 50 mm depth x 300 mm wide with Diamond Wheel



CE002G
355 mm (14") Dry



i PRODUCT DETAILS
Models and specs may vary by country



CE001G
355 mm (14") Dry & Wet



i PRODUCT DETAILS
Models and specs may vary by country



Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



www.makita.my
makita@makita.my

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No. 12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

Max. cutting capacity
127mm



CE002G only CE001G only

40V^{Li-ion} max + 40V^{Li-ion} max **XGT X2** 80V max

More powerful than engine tools



Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration
Front handle Rear handle
2.0/1.2
m/s
Concrete cutting




BL MOTOR High power Brushless motor



AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

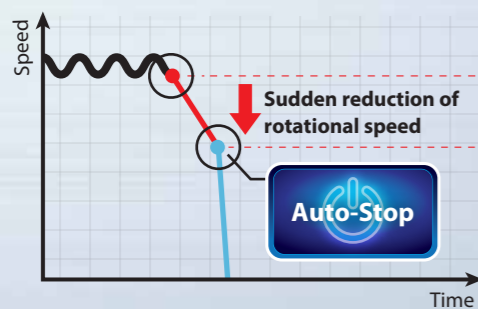

Dust collection rate
90%
or more
Concrete cutting

Can be used with Vacuum cleaner. CE002G only

Dust collection rate during operation is 90% or more in cutting concrete with vacuum cleaner*1 connected.

- Designed specially for cutting with diamond wheel
 - Our recommended vacuum cleaners *1 are those with air flow of 1.8m³/min or more.
- *1 VC4210M, VC002G series, etc

AWS Auto-start Wireless System

(CE002G only)

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



CE002G
355 mm (14")
Dry



Max. cutting capacity
127 mm

photo: VC006G

photo: CE002G



Electric brake



eXtreme Protection Technology

(CE001G only)
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather



photo: CE001G

LED job light



- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Overload indicator lamp



CE001G
355 mm (14")
Dry & Wet



Water supply kit can be connected.