



# Cordless Belt Sander BS001G



**XGT**  
**40V** **LI-ION**  
**max**

**High power similar or superior to corded model**  
**Optimal weight balance reduces unevenness in sanding**



**PRODUCT  
DETAILS**  
Models and specs  
may vary by country


Belt size

**76 x 533 mm**




### Optimal weight balance

The battery is positioned above the sanding belt on the front side of the tool so that the sanding pressure can be evenly applied to the sanding surface.

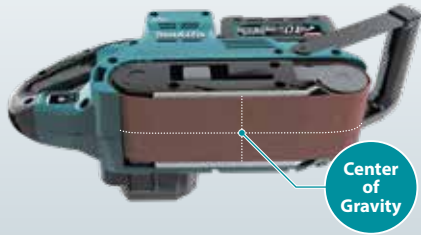

### Angle adjustable front handle

Sanding to the edge of the wall is possible by fixing the front handle at 0 degrees vertically or 30 degrees to the rear.

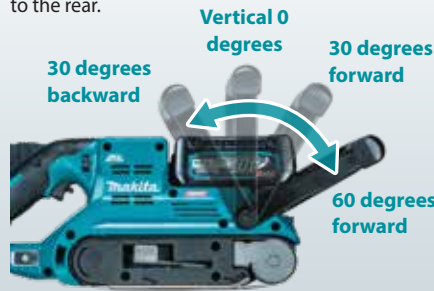

### Stationary use (Installed upside down)

The tool has a flat surface on top of the housing, and it also can be used as a stationary belt sander by using the Clamp complete and Guide rule set (both of them are optional accessories).



### High power BL motor



### Angle adjustable LED job light

- Twin LEDs with afterglow function
- Adjustable angle: 45 degrees



### Lock-on / Lock-off function



### eXtreme Protection Technology



### AWS Auto-start Wireless System

Connects to compatible vacuum cleaners with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



### Dust bag with anti-drop feature

We have adopted a new dust bag equipped with a lock mechanism. This keeps the dust bag from falling off due to its own weight when the tool is used vertically, such as when sanding walls.



### Variable speed control by dial

Adjustable to five speeds according to the material or usage.



### Flush sanding (Front, right side)

With the flat right side, it enables sanding along walls.



### Accessories (optional)

#### Clamp complete

Part No. 192694-6



#### Guide rule set

Part No. 1915E3-1



#### Sanding shoe set

Part No. 193070-7



#### Carbon plate

Part No. 193197-3



#### Cork rubber plate

Part No. 193199-9



### BS001GZ01 76 x 533 mm (3 x 21")

#### Cordless Belt Sander

- High power similar or superior to corded model, optimal weight balance reduces unevenness in sanding.



**Li-ion** Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

\*Recommended batteries  
2.5Ah, 4.0Ah, 4.0Ah (F), 5.0Ah

**40Vmax**



Standard Equipment:  
Dust Bag, Abrasive Belt

- GZ01: With Makpac Connector Box Type 4, Without Charger & Battery



Belt Width	76 mm (3")
Belt Length	533 mm (21")
Belt Speed	120 - 470 m/min (390 - 1,540 ft/min)
Dimensions (L x W x H)	440 x 148 x 165 mm (17-1/4 x 5-7/8 x 6-1/2")
Net Weight (with battery)	4.5 - 5.1 kg (9.9 - 11.2 lbs)
Continuous Usage Time (approx.)	12 min with BL4040 Douglas fir with sanding belt grit # 80

Like us on Facebook  
**MAKITA MALAYSIA**

\*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

**12 MONTHS WARRANTY**



**Makita Power Tools (Malaysia) Sdn. Bhd.** Co. Registration No.: 201301001778 (1031615-M)

#### HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

#### Johor (Johor Bahru) Service Centre

No. 12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07-364 9406 | Fax: 07-364 9407

#### Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.  
Tel: 082-496 800 | Fax: 082-496 900

#### Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
Tel: 088-388 278 | Fax: 088-388 279

[www.makita.my](http://www.makita.my)  
✉ makita@makita.my