

Cordless Pruning Saw Lineup

DUC150

18V



DUC101

18V



UC100D

12V max



	DUC150	DUC101	UC100D
Chain speed (at no load)	8.0 m/s	8.0 m/s	8.0 m/s
Saw chain	Type: 80TXL / Pitch: 0.325" / Gauge: 1.1 mm (0.043") Guide bar length: 150 mm (6")	Type: 80TXL / Pitch: 0.325" / Gauge: 1.1 mm (0.043") Guide bar length: 100 mm (4")	Type: 80TXL / Pitch: 0.325" / Gauge: 1.1 mm (0.043") Guide bar length: 100 mm (4")
Chain oil tank volume	55 mL (1.9 oz)	55 mL (1.9 oz)	55 mL (1.9 oz)
Dimensions (L x W x H)	w/ BL1830B / BL1840B / BL1850B / BL1860B: 459 x 90 x 249 mm (18 x 3-1/2 x 9-3/4")	w/ BL1830B / BL1840B / BL1850B / BL1860B: 408 x 90 x 249 mm (16 x 3-1/2 x 9-3/4")	w/ BL1016/BL1021B: 383 x 90 x 220 mm (15-1/8 x 3-1/2 x 8-5/8")
Net weight	1.7-2.0 kg (3.7-4.4 lbs.)	1.6-2.0 kg (3.5-4.4 lbs.)	1.5-1.6 kg (3.3-3.5 lbs.)

Accessories (optional)

Guide bar 6 set

Part No. 1912F1-4

For saw chain type: 80TXL
Length: 150 mm (6")
Gauge: 1.1 mm (0.043)



Saw chain 6 set

Part No. 1912E8-3

Type: 80TXL
Length: 150 mm (6")
Gauge: 1.1 mm (0.043)



File holder set

Part No. D-70948

4.0mm (5/32")



Sprocket 7 set

Part No. 1911W5-9



Oil vessel set

Part No. 199897-3

100mL



Hook complete set

Part No. 1914Y8-5

For UC029G only
A hook allowing the tool to be attached and detached with one hand to a carabiner or similar.



UC029GZ 150 mm (6")

Cordless Pruning Saw

• Suitable for cutting tasks such as pruning shrubs and small branches, as well as tree care.



Li-ion Ah 4.0 | 2.5 | 2.0
*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)
Not compatible with 5.0Ah & 8.0Ah batteries
40Vmax



Standard Equipment:
Oil Vessel Set, Guide Bar,
Saw Chain, File Holder Set, Chain Cover

• GZ: Without Charger & Battery



Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No. 12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my



Delivers strong and consistent power for your pruning and wood-cutting tasks



Work efficiency
70% UP*
Battery: BL4025
on a full battery charge

Test conditions
Cut ø50 cypress wood
under an optimal
pressing load of 25N or
less on the cutting edge

* Compared with our 18V models



Excellent combination of high power and lightweight design

Compact yet delivers strong and consistent power



Retractable guard

covers the upper side of guide bar, and opens gradually wider as saw chain cuts deeper in branch.

Lock-off lever accessible from both sides

BL
MOTOR

Equipped with a high-power BL motor



Work amount


Test conditions

Cut ø50 cypress wood under an optimal pressing load of 25N or less on the cutting edge

415 pcs.

Battery: BL4025

Automatic chain lubrication

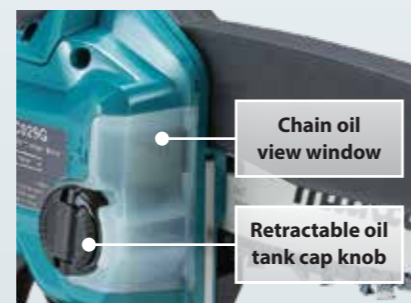

minimizes the chance that saw chain will stall due to forgetting to supply chain oil.

Tool-less change and tension adjustment of saw chain



- Simply loosen and re-tighten the lever to automatically adjust the tension of saw chain.
- This easy-to-operate large lever is designed to be pulled up and turned easily.

XPT

eXtreme Protection Technology



High water-resistance allows the user to operate the tool even if it is wet with water.

Optional accessory

A hook with quick attachment / detachment

A hook allowing the tool to be attached and detached with one hand to a carabiner or similar.

Part No. 1914Y8-5
For UC029G only

