



Cordless Driver Drill
Cordless Hammer Driver Drill
DDF490 13 mm (1/2") / DHP490 13 mm (1/2")



The maximum torque of 65 N·m with a powerful brushless motor



Cordless Driver Drill

DDF490

Action modes

-  Drilling
-  Screwdriving



Cordless Hammer Driver Drill

DHP490

Action modes

-  Drilling
-  Hammer drilling
-  Screwdriving



*Except when the BLB182 battery is installed

Lightweight and compact, easy to handle even in narrow spaces

Lightweight at
1.4 kg
With BLB182 battery,
BL1815N battery

Compact overall length
← DDF490: 167mm, DHP490: 172mm
Predecessor Model: 169mm, 182mm →



Single sleeve keyless chuck
allows for easy bit installation/removal
with one hand.

Capacity of drill chuck
1.5 mm (1/16") - 13 mm (1/2")

LED job light
Single LED with preglow and afterglow functions



Variable speed control by trigger
allows for speed adjustments based
on the material or application.

Mechanical 2-speed
High speed for light duty:
0 - 1,900 min⁻¹
Low speed for heavy duty:
0 - 500 min⁻¹




20-stage torque settings
allow for fine adjustments to
suit the task at hand.

Hook can be attached
(Optional accessories)
Short: part No. 346449-3
Standard: part No. 346317-0



Battery and charger compatibility

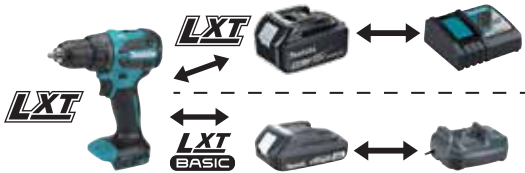

Charge the LXT batteries with the LXT battery chargers and
the LXT BASIC battery with the LXT BASIC battery charger.

XPT
*Except when the BLB182
battery is installed

DDF490SF1J | DDF490WV | DDF490Z 13 mm (1/2")

Cordless Driver Drill

18V



- SF1J: 1x Standard Charger, 1x 3.0Ah Battery,
1x Makpac Connector Box Type 1
- WV : (LXT Basic) 1x Standard Charger, 1x 2.0Ah Battery,
With Carrying Case
- Z : Without Charger, Battery & Carrying Case



BL MOTOR XPT

Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	13 mm (1/2")
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard: 50 N-m (440 in.lbs.) Soft: 27 N-m (240 in.lbs.)
Max Torque	65 N-m (580 in.lbs)
Dimensions (L x W x H)	167 x 81 x 237 mm (6-9/16 x 3-3/16 x 9-3/8")
Net Weight	1.4 - 1.7 kg (3.1 - 3.7 lbs)

DHP490SFX1 | DHP490WVE | DHP490Z 13 mm (1/2")

Cordless Hammer Driver Drill

18V



- SFX1: 1x Standard Charger, 1x 3.0Ah Battery,
Makita Tool Bag
- WVE : (LXT Basic) 1x Standard Charger, 2x 2.0Ah Battery,
With Carrying Case
- Z : Without Charger & Battery



BL MOTOR XPT

Capacity	Masonry: 13 mm (1/2") Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	13 mm (1/2")
Impacts Per Minute (IPM)	High: 0 - 28,500 Low: 0 - 7,500
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard: 50 N-m (440 in.lbs.) Soft: 27 N-m (240 in.lbs.)
Max Torque	65 N-m (580 in.lbs)
Max Output	460 W
Dimensions (L x W x H)	172 x 81 x 237 mm (6-3/4 x 3-3/16 x 9-3/8")
Net Weight	1.4 - 1.7 kg (3.1 - 3.7 lbs)

Like us on Facebook
MAKITA MALAYSIA

*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

12 MONTHS WARRANTY

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
✉ makita@makita.my