



Makita

Cordless Combination Hammer
HR011G
 28 mm (1-1/8") Adapted for SDS-PLUS bits



XGT
40V Li-ion max

Impact energy
3.3
 Joule

Maximum drilling efficiency in its class*

Compact and lightweight design with low vibration

* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of November 2025.



Dust collection system
DX17

Clean operation with excellent maneuverability

Low vibration
 Hammer drilling into concrete

10.5 m/s²

Work efficiency
 increased by

about **30 %**

Compared to our previous model

Max. drilling capacity

28 mm

Accessories (optional)

Dust case set
 Part No. 1916C0-9



HEPA Filter set
 Part No. 199596-7

HEPA filter



Dust cup set
 For drilling
 Part No. 1914L7-6



Dust cup set
 For hammering
 Part No. 1914L9-2



Hook set
 Part No. 191W90-3



Grease vessel set
 Part No. 194683-7



Wireless unit set
 Part No. 199393-1



Drill chuck set
 Part No. 194041-7



HR011GM202 | HR011GZ 28 mm (1-1/8")

Cordless Combination Hammer

40Vmax



*Recommended batteries
 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)



Accessories
 (Optional for HR011GZ)
 *Come with HR011GM202
DX17 Dust Collection System Set

Standard Equipment:
 Side Grip, Depth Gauge,
 Grease Vessel

- GM202: 1x Fast Charger, 2x 4.0Ah Battery, 1x Makpac Connector Case (Type 4), 1x DX17 Dust Collection System Set, 5x Sealing Cap
- GZ : Without Charger, Battery & Carrying Case

*Not applicable for Z model

BL MOTOR XPT AFT AVT AWS

| | |
|------------------------|--|
| Impact Energy | EPTA-Procedure 05/2009: 3.3 J |
| Max Output | 1200 W |
| Capacity | Concrete (with TCT bit): 28 mm (1-1/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4") Core Bit: 68 mm (2-11/16") Diamond Core Bit: 80 mm (3-1/8") |
| No Load Speed (RPM) | 0 - 1,130 |
| Dimensions (L x W x H) | 391 x 104 x 223 mm (15-3/8 x 4-1/8 x 8-3/4") |
| Net Weight | 3.8 - 5.5 kg (8.4 - 12.1 lbs) |
| Work Amount (approx.) | 125 holes with BL4040 Masonry drill Ø 10.5 mm concrete 40 N/mm ² Depth 60 mm |

Dust collection system DX17 (option)

HEPA filter



PRODUCT DETAILS
 Models and specs may vary by country

HR011G

AWS

BL MOTOR AFT AVT XPT

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
 Tel: 03-8023 3824 (General) | Fax: 03-8022 1448
 03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
 Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
 Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
 Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:




www.makita.my

Maximum drilling efficiency in its class*

* In the category of 28 mm-class cordless hammer drills with SDS-plus shank. According to our research as of November 2025.

Drilling efficiency increased by about **30%**
Compared to our previous model

- Drill diameter: $\phi 16.0$ mm
- Depth: 60 mm
- Concrete with compressive strength of 40 N/mm²

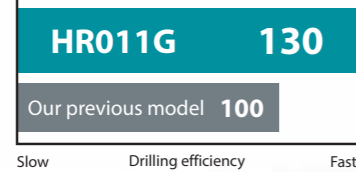

BL MOTOR
High-power brushless motor

Compact and lightweight
600 g lighter than our previous model



Filter cleaning
Turning the dial removes dust from the filter and restores dust collection performance.

Our previous model
* With the dust collection system installed

XPT
High water-resistance compatible with XPT (eXtreme Protection Technology)

Three operation modes

Rotation with Hammering



Hammering only



Rotation only



Electronic speed switch

From heavy-duty tasks to delicate tasks




| Speed indicator | Blows per min: min ⁻¹ | Recommended application |
|-----------------|----------------------------------|---|
| 4 | 5,000 | Drilling, chiseling and chipping work |
| 3 | 4,250 | Scraping and chiseling work |
| 2 | 3,250 | Reducing breakage and wear when drilling with small-diameter bits |
| 1 | 1,400 | Minimizing edge chipping when drilling into tiles |



Dust collection system DX17

Clean operation with excellent maneuverability

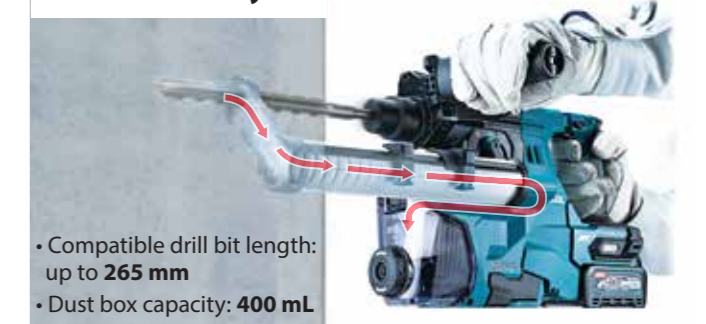

- Compatible drill bit length: up to 265 mm
- Dust box capacity: 400 mL

AVT

Anti-Vibration Technology

Minimizing user strain during continuous operation.

Low vibration

- Hammer drilling into concrete: 10.5 m/s²
- Hammer drilling into concrete with DX17: 11.0 m/s²
- Chiselling: 7.3 m/s²

According to EN62841-2-6




Counterweight mechanism

Reduces vibration by counterbalancing piston movement.

AFT

Active Feedback sensing Technology

Turns the motor off if bit rotation is suddenly forced to stop.

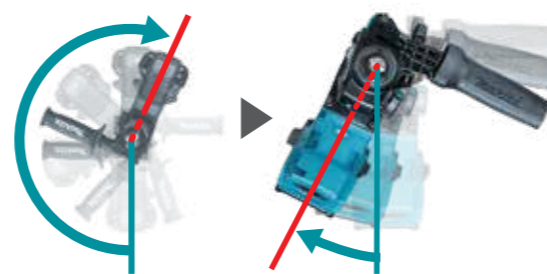

Automatically stops

AWS

Auto-start Wireless System

Connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



New light structure

By adopting a light-guiding structure that directs the tool's LED light to the front of the dust collection system, the need for an LED light and LED circuit within the system is eliminated.

