

VS001G
Cordless Vacuum Sweeper

1. Capable of cleaning dust or waste of all sizes
2. Dust container capacity 24L

Dust pickup rate

about
90%

Cleaning width with Side brush

650 mm



Air volume comparable to 28cc-class engine models

Accessories (optional)

Flat nozzle set

Part No. 1916V7-8



Gutter nozzle set

Part No. 191B03-8



Adapter pipe 80-72 set

Part No. 191L13-5



For connecting the gutter nozzle set

Vacuum kit set

Part No. 1916T9-0



Capacity: 50 L

UB003GZ

Cordless Blower

40Vmax



*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah, 8.0Ah (H)



Come with
Vacuum kit set
Part No. 1916T9-0

Standard Equipment:
Flat Nozzle, Vacuum Kit,
Band Assembly, Hex Wrench

* GZ: Without Charger & Battery



Max Air Volume	Low: 9.4 m ³ /min (332 CFM) High: 13.8 m ³ /min (487 CFM)
Max Air Velocity	Low: 0 - 46 m/s (0 - 103 MPH) High: 0 - 68 m/s (0 - 152 MPH)
Max Blowing Force	Low: 7 N High: 16 N
Dimensions (L x W x H)	699 - 830 x 201 x 400 mm (27-1/2 - 32-3/4 x 7-7/8 x 15-3/4")
Net Weight	5.0 - 6.1 kg (11.0 - 13.4 lbs.)
Continuous Usage Time (approx.)	Low: 30 min High: 9 min with BL4050F



Vacuum
Tool-less switching
Blower



PRODUCT
DETAILS
Models and specs
may vary by country

Blowing	
Max air volume	Max air velocity
13.8 m ³ /min	68 m/s
	56 m/s (Average)


Vacuuming	
Max air volume	Max sealed suction
13.0 m ³ /min	3.3 kPa





Delivers blower and vacuum air volume comparable to 28cc-class engine models, with tool-less switching between blower and vacuum modes

Insert. Rotate. Lock with one touch.

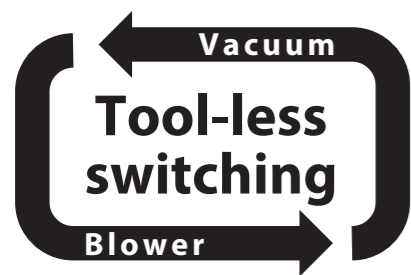

- Motor interlock** restricts startup unless the pipes are properly secured.
- One-touch locking lever** For attaching and detaching the blower pipe and elbow pipe.
- Sub-handle** improves control during sideways operation.
- One-touch locking lever** For attaching and detaching the suction pipe.
- Mulching blades** finely shred leaves during vacuuming, reducing volume and emptying frequency.

Before vacuuming **After vacuuming**

Air volume is adjustable from gentle to strong.

- Cruise control lever** reduces finger fatigue during continuous use. Trigger operation is also available.
- Mode switch button** provides tactile feedback for quick switching. Clear click feedback.

High water-resistance compatible with XPT

eXtreme Protection Technology **XPT**

Continuous run time on a full battery charge

	With BL4080F battery	With BL4050F battery
Low mode	About 45 min	About 30 min
High mode	About 15 min	About 9 min

