

**Accessories (optional)**

**Dust extraction system** Part No. 191X39-9

**DX15** Maximum bit size attachable:  $\varnothing 28\text{mm} \times 260\text{mm}$



Drilling depth can be adjusted



Position adjustable Dust collection inlet



Equipped with Filter cleaning mechanism



**Dust case set**  
Part No. 199586-0



**Filter set**  
Part No. 199557-7



**Filter set**  
Part No. 195173-3



**Hook set**  
Part No. 191W90-3



**Portable Power Pack**

**PDC01**

Powered by up to four 18V LXT batteries



**PDC1200**



Equipped with built-in battery cells



**Adapter set (40Vmax)**

Part No. 191N62-4



Charger: DC4001  
Charging time: 6hours

**HR007GZ 28 mm (1-1/8")**

**Cordless Combination Hammer**

**40Vmax**



\*Recommended batteries  
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)  
3 modes



**Standard Equipment:**  
Side Grip, Depth Gauge, Cloth,  
Grease Vessel, Air Duct Cap

\* GZ: Without Charger, Battery & Carrying Case

Not applicable for Z model

**BL MOTOR XPT AVT AWS AFT**

Impact Energy	EPTA-Procedure 05/ 2009: 3.0 J
Capacity	Masonry: 28 mm (1-1/8")   Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")   Core Bit: 54 mm (2-1/8") Diamond Core Bit: 65 mm (2-9/16")
Impacts Per Minute (IPM)	0 - 5,000
No Load Speed (RPM)	0 - 980
Dimensions (L x W x H)	458 x 101 x 234 mm (18 x 4 x 9-1/4")
Net Weight	3.8 - 4.8 kg (8.4 - 10.6 lbs)
Work Amount (approx.)	118 holes with BL4040 Concrete Grade 40 N/mm <sup>2</sup> $\varnothing$ 10.5 mm x 60 mm depth

Adapted for SDS-PLUS bits

Impact energy  
[EPTA-Procedure 05/2009]

**3.0**  
Joule

**Cordless 28mm D-handle combination hammer**



**3 mode**

- Rotation
- Rotation + Hammering
- Hammering

Work speed  
 $\varnothing 10.5\text{mm}$  (3/8")  
**6.1 sec**  
Battery: BL4040



**HQ & Service Centre**

Lot 824, Jalan Subang 5, Subang Industrial Area,  
47500 Subang Jaya, Selangor.  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

**Johor (Johor Bahru) Service Centre**

No.12 & 14, Jalan Roemerah 2/9,  
Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07-364 9406 | Fax: 07-364 9407

**Sarawak (Kuching) Service Centre**

Lot 1227, Lorong Demak Indah 2A,  
Demak Laut Industrial Area, Phase 2A,  
93250 Kuching Sarawak.  
Tel: 082-496 800 | Fax: 082-496 900

**Sabah (Kota Kinabalu) Service Centre**

Lot 19, Jalan Buah Duku,  
Kolombong Light Industrial Estate, Off Jalan Kolombong,  
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my



**BL  
MOTOR**

## Anti-Vibration Technology

Equipped with anti-vibration main handle and side handle to reduce vibration to operator's hands for less hand and arm fatigue from long continuous operation.

**AVT** Vibration level at main handle  
**8.6 m/s<sup>2</sup>**




Work speed		
Drilled holes to a depth of 60mm (2-3/8") at 8kg pressing load Concrete with compressive strength of 40N/mm <sup>2</sup> BL4040 / on full battery charge		
ø10.5mm (3/8")	ø12.5mm (1/2")	ø16.0mm (5/8")
<b>6.1 sec</b>	<b>8.6 sec</b>	<b>12 sec</b>

with Dust extraction system DX15


## AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



## AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

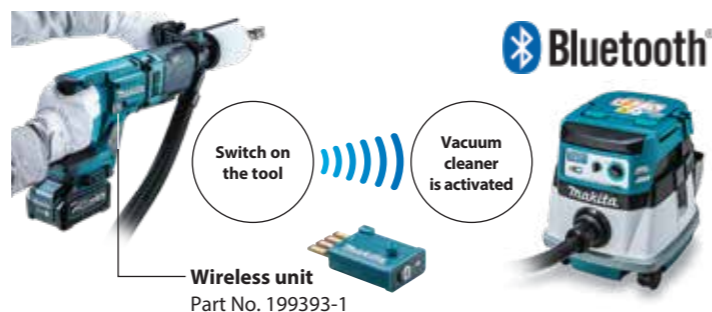

## XPT eXtreme Protection Technology

Adapted for SDS-PLUS bits

