



Slide Compound Miter Saw LS1110F 255 - 260 mm (10 - 10-1/4")



LED job light with cut line guide function



i
PRODUCT
DETAILS
Models and specs
may vary by country




*Max cutting width:
310 mm

*Max cutting height:
91 mm

*with 260mm (10-1/4") saw blade

LED job light with cut line guide function

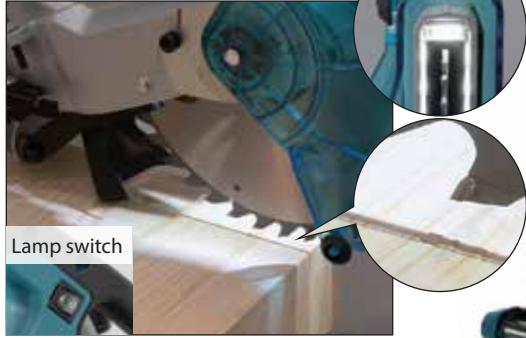


Lamp switch

LED job light casts a shadow of the saw blade onto the workpiece as an exact cutting line. By aligning the shadow with the ink line on the workpiece, you can make an exact cut.


Bevel range of 47° left and 2° right

Easy bevel angle change from 45° to 47° left and from 0° to 2° right with simple operation of a push-button

Lever (for bevel angle)



Push-button

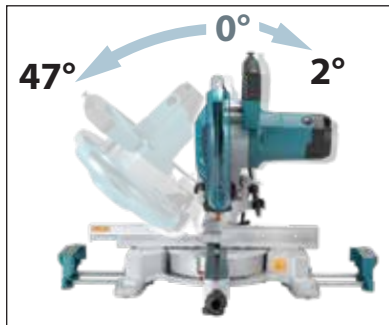

Slide style sub fence

(left side only)



Miter range of 47° left and 47° right



Carrying handle for easy transportation to job site


Soft grip

Sub base


can be pulled out for more stable cutting of wide workpiece.

Cutting capacity (height x width) with 260mm (10-1/4") saw blade

Cross Cut




Miter Cut (left & right)




| | | | |
|----------------------|----------------------------------|------------------------------------|---------------------------------|
| Miter 0° Bevel 0° | 91 x 310 mm (3-5/8 x 12-1/4") | Miter 45° left / right Bevel 0° | 91 x 220 mm (3-5/8 x 8-5/8") |
|----------------------|----------------------------------|------------------------------------|---------------------------------|

Bevel Cut (left & right)



Compound Cut



| | | | |
|----------------------------|---------------------------------|--|----------------------------|
| Miter 0° Bevel 45° left | 50 x 310mm (2 x 12-1/4") | Miter 45° left / right Bevel 45° left | 50 x 220mm (2 x 8-5/8") |
| Miter 0° Bevel 2° right | 85 x 310mm (3-3/8 x 12-1/4") | | |

Accessories (optional)

Miter Saw Stand WST06



LS110F 255 - 260 mm (10 - 10-1/4")

JM23000123

Slide Compound Miter Saw

• LED job light with cut line guide function.



Standard Equipment:
TCT Saw Blade (D-77338), Vertical Vise,
Dust Bag, Hex Wrench



| | |
|-------------------------|---|
| Continuous Rating Input | 1,450 W |
| Wheel Diameter | 255 - 260 mm (10 - 10-1/4") |
| Miter Angle | 47° L / 47° R |
| Bevel Angle | 47° L / 20° R |
| Max Cutting Capacity | Miter 0°, Bevel 0° 91 x 310 mm (3-5/8 x 12-1/4") Miter 45°, L/R, Bevel 0° 91 x 220 mm (3-5/8 x 8-5/8") |
| No Load Speed (RPM) | 4,500 |
| Dimensions (L x W x H) | 745 x 497 x 565 mm (29-1/4 x 19-1/2 x 22-1/4") |
| Net Weight | 16.4 kg (36.2 lbs) |
| Power Supply Cord | 2.0 m (6.6 ft) |

Like us on Facebook
MAKITA MALAYSIA

*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

12 MONTHS WARRANTY

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
✉ makita@makita.my