

Battery Powered Wheelbarrow series

DCU603

Manual dump + Dump bucket
 • Rust-free plastic bucket accepts wet loads.
 • Inside bottom and front faces are angled for easy dump operation.



Bucket capacity	
Heaped capacity	200 L
Full liquid capacity	100 L

Manual dump
 designed for increased efficiency in unloading




DCU604

Manual dump + Pipe frame carrier
 Ideal for container boxes or bagged materials



Manual dump
 High unloading efficiency

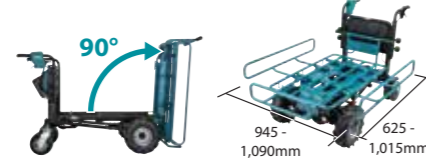

Telescopic loading platform

DCU605

Flat bucket
 • Rust-free plastic bucket accepts wet loads.
 • Optimal for operations not requiring dump function such as feeding in stables



Bucket capacity	
Heaped capacity	295 L
Full liquid capacity	250 L

There is no screw on the inside of the bucket, allowing for smooth unloading operation using tool such as a clay-spade.
 Capped nozzle for draining liquid is convenient when carrying liquid or cleaning the bucket.



Accessories (optional)

Tire 330 (single) set

Part No. 1911K4-7
 For lawn and pavement
 • Tubed tire
 • Color: Black
 • Includes one tire.



Front tire

Gray tire 330 (single) set

Part No. 1911K5-5
 For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.
 • Tubed tire
 • Color: Gray
 • Includes one tire.



Front tire

Gray tire 210 (single) set

Part No. 1911K6-3
 For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.
 • Tubed tire
 • Color: Gray
 • Includes one tire.



Rear tire

DCU601Z

Battery Powered Wheelbarrow

• 4-wheel barrow (with front-wheel drive system) for stable load-carrying even with heavy loads.
 • Electric lift: Enables the user to lift up the flat frame to 1,020mm above ground level electrically.



Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,400 x 730 x 820 mm (55 x 28-3/4 x 32-1/4")
Net Weight	145 kg (320 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

• Z: Without Charger & Battery



DCU602Z

Battery Powered Wheelbarrow

• 4-wheel barrow (with front-wheel drive system) for stable load-carrying even with heavy loads.
 • Electric dump: Reduces workload when dumping soil and other materials on the ground that are too heavy to lift manually.



Max Load Capacity	300 kg on flat ground (0 - 3 degrees) 180 kg on slope (3 - 12 degrees)
Traveling Speed	Forward, High: 5 km/h Medium: 3.5 km/h Low: 1.5 km/h Reverse: 1.0 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	1,480 x 730 x 820 mm (58-1/4 x 28-3/4 x 32-1/4")
Net Weight	145 - 147 kg (319.7 - 324 lbs)
Continuous Usage Time (approx.)	7.2 km/ 100 min with 4 pcs BL1860B batteries on flat ground with lights off loaded with 300 kg at 5.0 km/h

• Z: Without Charger & Battery



Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
 Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
 Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
 03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
 No. 12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
 Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
 Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
 Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
 Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
 Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
 makita@makita.my



Battery Powered Wheelbarrow DCU601 / DCU602



DCU601 Electric lift type



PRODUCT DETAILS
 Models and specs may vary by country.
 DCU601



DCU602 Electric dump type



PRODUCT DETAILS
 Models and specs may vary by country.
 DCU602



Electric lift type



Electric lift type

DCU601



Electric lift type



(elevated to 1,020mm in approximately 30 seconds.)

- The electric lift is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.



Compatible with various sizes of loads

The front, left, and right guards are designed to be easily lowered below the flat frame by lifting and sliding them, allowing for easy loading and unloading while dragging loads without lifting up them.



Loading platform size: 965 x 645 mm (L x W)



Electric dump type



Electric dump type

DCU602




Electric dump

- Reduces workload when dumping soil and other materials on the ground that are too heavy to lift manually.



[Tilts electrically up to 75°]
(Tilts to 75° in approx. 30 seconds.)

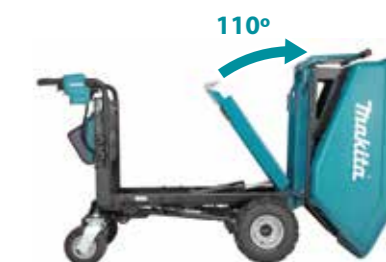

[Can be manually tilted for more than 75°]

- The electric dump is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.



Bucket capacity	
Heaped capacity	Full liquid capacity
200 L	100 L

Max load capacity
on flat ground (0 - 3 degrees)

300 kg

on slope (3 - 12 degrees)

180 kg

Traveling distance **7.2 km**

with BL1860B x 4
On flat ground, with lights off, loaded with 300kg, at 5.0km/h

Traveling speed change

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds (1.5/3.5/5.0 km/h)	1 speed (1.0 km/h)

Max climbing ability

12°



Hand brake lever

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.



Electric brake

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

Electromagnetic brake

- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.

High power
Brushless motor **BL MOTOR**



Tilt mechanism of rear wheels

Rear wheel axle is designed to tilt to enable Front wheels (driving wheels) to stably touch the ground for reliable driving even on bumpy road surfaces.



Swivel lock on rear wheels

Twin tires (rear wheels)




Headlights

- turn off automatically with no operation for 10 minutes.



Tool-less handle height adjustment

Handle height can be adjusted according to user's height without tool simply by turning 2 knob screws.



Neutral mode

shuts off the power transmission between the motor shaft and the axle in case of no battery installation, low battery capacity or broken motor, enabling to drive the wheelbarrow manually.

*This function is for emergencies. Refer to the instruction manual for details.



Two or four batteries can be installed for a 2-series / 2-parallel connection for a secure amount of work.



XPT

IPX4-compatible

High water-resistance allows to operate the machine even if it is wet with water.

