



Max. cutting depth

47 mm

No load speed

6,400 min⁻¹

47mm

Accessories (optional)

EFFICUT T.C.T. saw blade

125 mm x 25T | 125 mm x 45T
Part No. E-28880 | Part No. B-69462



HS014GZ 125 mm (4-7/8")

Cordless Circular Saw

40Vmax



*Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)
Not compatible with 5.0Ah & 8.0Ah batteries



Standard Equipment:
TCT Saw Blade, Hex Wrench, Dust Nozzle

• GZ: Without Charger & Battery

BL MOTOR AWS XPT AFT ADT

Blade Diameter	125 mm (4-7/8")
Max Cutting Capacity	0°: 47 mm (1-7/8") 45° right: 30 mm (1-3/16") 15° left: 20 mm (13/16")
No Load Speed (RPM)	6,400
Dimensions (L x W x H)	264 x 203 x 246 mm (10-3/8 x 8 x 9-11/16")
Net Weight	3.3 kg (7.3 lbs)
Work Amount (approx.)	257 cuts with BL4040F Melapi thickness 45 mm width 300 mm Bevel angle 0°

**Capable of
flush cutting**

Max cutting depth

15° left: **20 mm**



BL MOTOR ADT
AFT AWS XPT

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my

High speed cutting

BL MOTOR




Equipped with an XGT battery, BL motor, and EFFICUT blade, this tool delivers unparalleled power and efficiency.

EFFICUT

ADT Automatic torque Drive Technology


automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

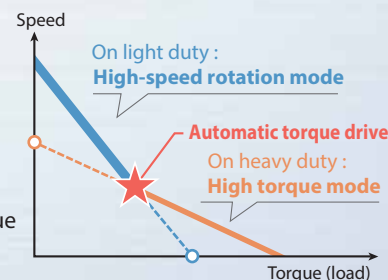

AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

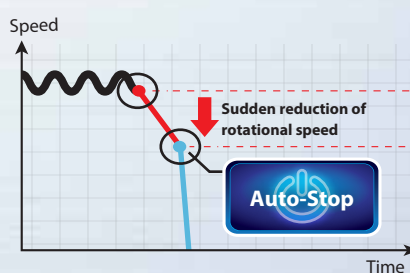

Work amount


257 cuts^{*1}

^{*1} Test material: Merapi t45mm x 300mm
Bevel angle: 0° cross cutting
Battery: BL4040F on a full battery charge
^{*}Productivity and output vary significantly depending on the hardness of the workpiece and the cutting tool used.



Flush cutting capability

(Sub base can be removed without tool)

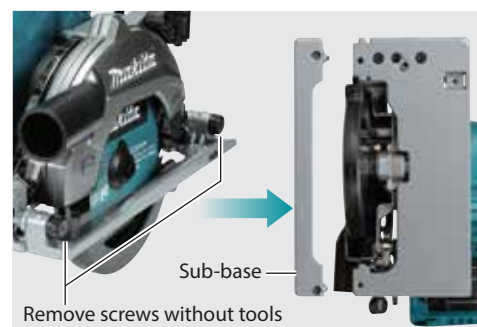


Remove the sub-base
when making flush cuts.



Hook (Tool hanger)



Blower function & LED Job light
LED Job light with preglow and afterglow functions

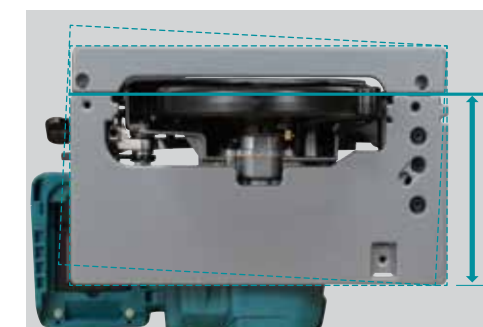

Supports fine-tuning
of the parallelism between the base side and the saw blade



Safety cover open lever
When it is necessary to raise the safety cover, such as for flush cutting, the cover can be opened by manual operation using the lever.



One-touch depth adjustment
is available with the depth scale and lock lever.



Auto-start Wireless System
Connects to a compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



High water-resistance compatible with XPT^{2} (eXtreme Protection Technology)**
^{**2}XPT is designed to help protect against dust and water ingress, but complete protection is not guaranteed.

Safety cover open lever