

40V<sup>Li-ion</sup>max + 40V<sup>Li-ion</sup>max

**XGT X2**  
80V<sup>max</sup>

40V<sup>max</sup>  
mechanism  
movie



This movie was filmed in Japan. Models and specs may vary by country.

**Makita**

**Cordless Grass Trimmer UR012G**

**XGT**

**Accessories (optional)**

**Chisel blade**  
Part No. 199872-9  
Blade dia.: 225mm



**Protector 225 set MG**  
Part No. 199873-7



**Shredder blade**  
Part No. 199874-5  
Blade dia.: 270mm



**Protector set MG**  
Part No. 199875-3



**Trimmer head**

Part No. 196324-1  
Cord/Line : 2.4mm x3.6m  
Ref.: UN-74L



Part No. 197296-3  
Cord/Line : 2.0mm x3m  
Ref.: ECO 4L



Part No. 199884-2  
Cord/Line : 2.7mm  
Ref.: 105-M10L



Part No. 191D93-3  
Cord/Line : 2.4mm  
Ref.: 121-M10L



Part No. 191D89-4  
Cord/Line : 2.0mm x4m  
Ref.: 96-M10L



**Four-leaf Spiral Nylon cord**



**Green**  
Size: 2.0mmx15m  
Part No. 197472-9



**Orange**  
Size: 2.4mmx15m  
Part No. 198501-1

**Protection guard for brush cutting blades**

Part No. 191B54-1



**Brushcutter blade**

	2-tooth blade	4-tooth blade
<b>Blade dia</b>		
<b>Blade dia</b>	305mm	255mm
	195624-6	196895-8

**Plastic blade**

	Plastic blade Set	Replacement plastic blade
<b>Cutting width</b>		
<b>Cutting width</b>	255mm	305mm
	198384-9	198427-7

**UR012GZ02**

**Cordless Grass Trimmer**

40V<sup>max</sup> x2



\*Recommended batteries  
4.0Ah (F), 5.0Ah, 8.0Ah

VIDEO CLIP  
Models and specs may vary by country



**Standard Equipment:**  
Metal Blade, Nylon Cutting Head,  
Plastic Blade, Accessory Bag,  
Hex Wrench, Box Wrench, Shoulder Belt

\* GZ02: Without Charger & Battery



<b>Max Output</b>	2,000 W
<b>Cutting Width</b>	Metal Blade: 305 mm (12") Chisel Blade: 225 mm (8-7/8") Shredder Blade: 270 mm (10-5/8") TCT Saw Blade: 255 mm (10") Nylon Cutting Head: 480 mm (18-7/8") Plastic Blade: 305 mm (12")
<b>No Load Speed (RPM)</b>	Metal Blade / Plastic Blade (305 mm): High: 0 - 6,800   Mid: 0 - 5,000   Low: 0 - 3,500 Nylon Cutting Head: High: 0 - 5,000   Mid: 0 - 4,200   Low: 0 - 3,500
<b>Spindle Size</b>	M10 x 1.25LH
<b>Dimensions (L x W x H)</b>	1,790 x 680 x 590 mm (70-1/2 x 26-3/4 x 23-1/4")
<b>Net Weight</b>	8.0 - 9.3 kg (17.6 - 20.5 lbs)
<b>Continuous Usage Time (approx.)</b>	Low: 126 min   Med: 84 min High: 56 min with BL4050F x2 (Metal Blade)



**XGT X2**  
80V<sup>max</sup>

**As powerful as 40cc petrol grass trimmer**



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

**HQ & Service Centre**

Lot 824, Jalan Subang 5, Subang Industrial Area,  
47500 Subang Jaya, Selangor.  
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448  
03-8022 1443 (Service)

**Johor (Johor Bahru) Service Centre**

No.12 & 14, Jalan Roemerah 2/9,  
Taman Johor Jaya,  
81100 Johor Bahru, Johor.  
Tel: 07-364 9406 | Fax: 07-364 9407

**Sarawak (Kuching) Service Centre**

Lot 1227, Lorong Demak Indah 2A,  
Demak Laut Industrial Area, Phase 2A,  
93050 Kuching Sarawak.  
Tel: 082-496 800 | Fax: 082-496 900

**Sabah (Kota Kinabalu) Service Centre**

Lot 19, Jalan Buah Duku,  
Kolombong Light Industrial Estate, Off Jalan Kolombong,  
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.  
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my

Max Output  
**2.0 kW**





# High power and large cutting width of 480mm similar to 40cc class engine grass trimmers



## Compatible with a variety of blades

Metal blade	ø305mm
Plastic blade	ø305mm
TCT saw blade	ø255mm
Chisel blade (A specially designed protector is necessary.)	ø255mm
Nylon cutting head (The cutting cord is ø2.7mm quiet type.)	ø480mm
Shredder blade (A specially designed protector is necessary.)	ø270mm

## Chisel blade 225 set MG

For brush and thin tree trunks and new growth. Not available in some countries due to local regulation

Part No. 199872-9

Protector 225 set MG

Part No. 199873-7



## Shredder blade 270 set MG

for thick grass, scrub and vines

Part No. 199874-5

Protector set MG

Part No. 199875-3



## Multi functional control panel: near right hand position for easy access and operation



## Reverse button



Reverse switch for clearing entangled weeds and grass from cutting head

Low noise level  
**96 or lower dB(A)**  
with ø480mm nylon cutting head

Max Output  
**2.0 kW**



The vertical center line of the handle bar always stays aligned with that of user



- Enabling user to work with less fatigue even in long continuous operation.
- Allowing for a wider swing.

Run Time (BL4050F x2)*			
Metal blade	High	Med	Low
	<b>56</b>	<b>84</b>	<b>126</b> min
Nylon cutting head	High	Med	Low
	<b>14</b>	<b>22</b>	<b>57</b> min

\*on a single full battery charge / With load



High water-resistance allows to operate the machine even if it is wet with water.



eXtreme Protection Technology  
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather




Rear end mounted motor  
Makes the tool weight balance similar to engine grass trimmers, enabling user to easily lift up the saw head for ridge weed removal, etc.



Automatic torque Drive Technology

Automatically changes the cutting speed according to grass density.

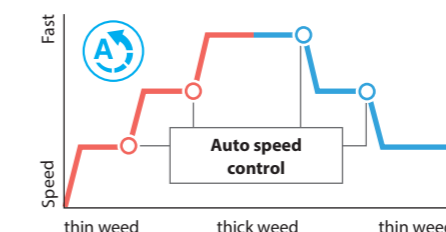

Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

