

Comes with valve adapters

	Light truck	Car	Tractor	Bicycle	Road bike	Ball	Beach ball / Swim ring
Valve shape							
Adapter	American 			British 	French 	For Balls 	For Swim rings / Beach balls
Objects Conditions	Light truck tire size: 205/70R16 0→600kPa High speed mode	Regular car tire size: 215/60R16 0→250kPa High speed mode	Tractor tire size: 7-14 0→180kPa High speed mode	Bicycle size: 26 inch 0→300kPa Low speed mode	Road bike tire size: 700x23C 0→700kPa High speed mode	Ball size: 700x23C 0→90kPa Ball mode	Beach ball size: 30cm High speed mode
	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)
Work speed (approx)	8 min 25 sec	9 min 40 sec	2 min 45 sec	3 min 30 sec	1 min 40 sec	1 min 50 sec	9 sec
Work amount on a full battery charge (approx)	4 times	3 times	19 times	14 times	32 times	25 times	780 times

MP001GZ

Cordless Inflator

40Vmax



MP001G




Max Air Pressure	1,110 kPa (161 PSI) [11.1 bar]
Air Discharge Amount	200 kPa: 24 L/min 700 kPa: 12 L/min
Hose Length	65 cm (25-1/2")
Dimensions (L x W x H)	320 x 108 x 231 mm (12-5/8 x 4-1/4 x 9-1/8")
Net Weight	2.9 - 3.5 kg (6.4 - 7.7 lbs)
Work Amount (approx.)	19 times with BL4040 (16" Car Tires 215/ 60R16 at High speed mode)

DMP181Z

Cordless Inflator

18V



DMP181



Max Air Pressure	1,110 kPa (161 PSI) [11.1 bar]
Air Discharge Amount	200 kPa: 2.2 L/min 700 kPa: 11 L/min
Hose Length	65 cm (25-1/2")
Dimensions (L x W x H)	316 x 108 x 231 mm (12-1/2 x 4-1/4 x 9-1/8")
Net Weight	2.5 - 2.8 kg (5.5 - 6.2 lbs)
Work Amount (approx.)	14 times with BL1860B (16" Car Tires 215/ 60R16)



High pressure inflation upto 1,100 kPa.

Air Discharge Amount (at High speed mode)	
MP001G [200kPa]	DMP181 [200kPa]
24 L/min	22 L/min

MP001G



PRODUCT DETAILS
Models and specs may vary by country.



DMP181



PRODUCT DETAILS
Models and specs may vary by country.





Ideal for inflating tires of trucks and large vehicles etc.

Max air pressure

1,110 kPa (161PSI) [11.1 bar]



Air discharge amount

MP001G

24 [200kPa] L/min


DMP181

22 [200kPa] L/min



Digital pressure gauge with backlight

- Easier to read, larger display
- Both current and target pressure values can be simultaneously displayed.
- Overheat warning lamp blinks, and the machine automatically turns off.

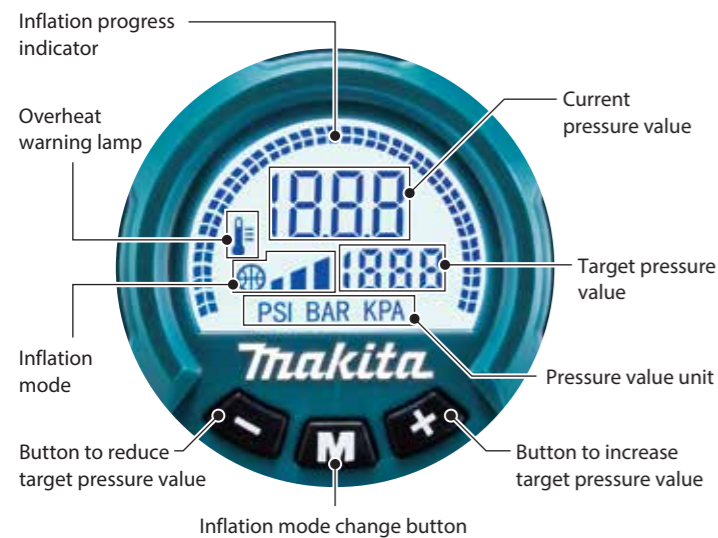


3 Inflation modes

Mode	Display	Purpose	Adjustable pressure range
High speed		To inflate objects in high speed	35 to 1,100 kPa (5 to 160 PSI)
Low speed		To inflate objects in low speed	
Ball		To inflate balls	35 to 110 kPa (5 to 16 PSI)

Air release function

In case of over-inflation, or if user wants to reduce the air pressure of road bike tires according to road conditions, press and hold the air release button to release air.

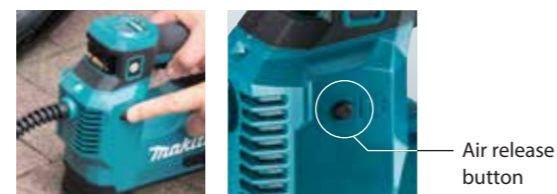

LED job light
for easy operation at dark places.



Storing hose
The hose can be attached to the hose holder of the tool.



Adapter holder



Backlight



XPT
eXtreme Protection Technology

Inflating from partially full to full

Objects Conditions	Regular car tire size: 215/60R16, 150→250kPa, High speed mode		Light truck tire size: 205/70R16, 500→600kPa, High speed mode		Medium truck tire size: 225/80R17.5, 700→800kPa, High speed mode	
	Model (Battery)	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)	DMP181 (BL1860B)	MP001G (BL4040)
Work speed	1.1 min	1.3 min	1.8 min	1.9 min	3 min	3.7 min
Work amount on a full battery charge	50 times	35 times	22 times	18 times	13 times	9 times