

High Power
Durability
Digital Communication



XGT
40V Li-ion max
XGT X2
80V max

XGT
40V Li-ion max

Lightweight and compact, yet capable of high-speed and powerful cutting

Work efficiency

Heavy-duty concrete cutting
Test conditions: Make 300mm-long and 50mm-deep cuts in a ground boundary block with water supply.

40% UP

Battery: BL4050F on a full battery charge
Compared with our 18Vx2 model

Cordless Power Cutters Line-up

CE001G 40V max x2

355 mm (14") | Dry & Wet

BL AFT XPT



Max cutting capacity	127 mm (5")
No load speed	5,300 min ⁻¹
Dimensions (L x W x H)	w/ BL4050F X2: 786 x 272 x 433 mm (31 x 10-3/4 x 17")
Net weight	12.3 - 14.1 kg (27.1 - 31.1 lbs.)



CE002G 40V max x2

355 mm (14") | Dry only

BL AFT AWS



Max cutting capacity	127 mm (5")
No load speed	4,200 min ⁻¹
Dimensions (L x W x H)	BL4050F X2: 825 x 272 x 487 mm (32-1/2 x 10-3/4 x 19-1/4")
Net weight	13.1 - 15.1 kg (28.9 - 33.3 lbs.)



CE004GZ 305 mm (12")

Cordless Power Cutter

This model with a blade diameter of 305 mm, offers a significant weight reduction compared to engine models, making it remarkably lightweight.



Li-ion 8.0 5.0 4.0
*Recommended batteries 4.0Ah (F), 5.0Ah, 8.0Ah
Not compatible with 2.0Ah & 2.5Ah batteries
40Vmax



Standard Equipment:
Box Wrench, Wrench Holder Assembly, Coupling Sleeve, Ring Set, Flange

GZ: Without Charger & Battery

BL AFT XPT

Wheel Diameter	305 mm (12")
Wheel Hole Diameter	25.4 mm (1")
Max Wheel Thickness	5.0 mm (3/16")
Min Wheel Thickness	2.0 mm (5/64")
Max Cutting Capacity	121 mm (4-3/4")
No Load Speed (RPM)	5,000
Dimensions (L x W x H)	663 x 240 x 406 mm (26-1/8 x 9-1/2 x 16")
Net Weight (with battery)	6.7 - 7.7 kg (14.8 - 17.0 lbs)
Work Amount (approx.)	9 cuts with BL4050F Concrete cutting 50 mm depth x 300 mm wide with diamond wheel and water supply

Like us on Facebook
MAKITA MALAYSIA

*Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

12 MONTHS WARRANTY



www.makita.my
makita@makita.my

Max cutting capacity

121 mm



PRODUCT DETAILS
Models and specs may vary by country

BL AFT XPT



High power

High efficiency equal or superior to our current model has been achieved with any one of the batteries BL4040F / BL4050F / BL4080F.

BL4040F
[4.0Ah]

BL4050F
[5.0Ah]

BL4080F
[8.0Ah]



Max cutting capacity **121 mm**



Net weight
6.7 kg
with BL4040F

Lightweight and compact for comfortable maneuverability



Anti-vibration housing to reduce vibration during cutting



Anti-vibration rubber (2 pcs)
Anti-vibration rubbers (2 pcs) are placed around the motor to reduce vibration during cutting.

Low vibration
[Left handle]
3.8 m/s²
[Right handle: 2.5 m/s²]




Rescue operation

Operable in various environments

- Unlike the engine type, the tool starts reliably even in oxygen-deficient conditions
- Emits no exhaust gases, making it usable indoors and underground

AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

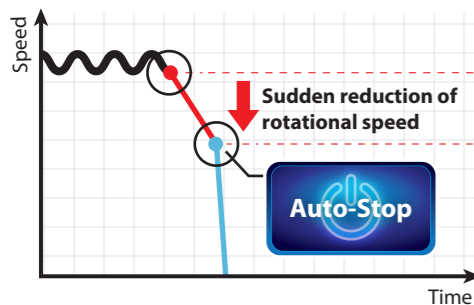

Rotatable guard

The position of Guard can be adjusted to suit working posture.



Overload indicator lamp

It alerts operator of overload with a red blinking LED and reduces unnecessary battery recharging by overload protection.



LED job light

LED job light enables operation in the dark sites where electricity is not supplied. It can be turned on/off by pushing the button conveniently located on the top of the tool.



Water supply kit can be connected.

By supplying water to the blade, the generation of dust during cutting is minimized.



Lock-off button

Lock-off button minimizes accidental start up.



XPT eXtreme Protection Technology / IPX4 compatible

40V max

CE004G

305 mm (12")
Dry & Wet

