

■ Max. cutting capacity (height x width)

Model	Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut	Crown molding, 45 degree type	Baseboard
LS003G	92 x 382 mm (3-5/8" x 15")	Miter 45° left / right	Bevel 45° left	Bevel 45° left Miter 45° left / right	61 x 268 mm (2-3/8" x 10-1/2")	Upright cutting 203 mm (8")
LS004G	68 x 310 mm (2-11/16 x 12-1/4)	Miter 60° left / right	Bevel 45° right	Bevel 45° right Miter 45° left / right	44 x 268 mm (1-3/4" x 10-1/2") 29 x 215 mm (1-1/8 x 8-1/2")	Upright cutting 171 mm (6-3/4") Upright cutting 133 mm (5-1/4") Horizontal cutting 320 mm (12-5/8") Horizontal cutting 248 mm (9-3/4")

Accessories (optional)

Vertical vise assembly
Part No. 126617-2



Crown molding stopper set
Part No. 192628-9



Stand
Part No. WST06 / WST07



Dust bag assembly
Part No. 122852-0



LS003GZ 305 mm (12")

Cordless Slide Compound Miter Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
TCT Saw Blade (B-67452), Dust Bag,
Triangular Rule, Vertical Vise, Hex Wrench

* GZ: Without Charger & Battery



Blade Diameter	305 mm (12")
Hole Diameter	25.4 mm (1")
Angle	Miter: 60°L / 60°R Bevel: 48°L / 48°R
Max Cutting Capacity	0° Miter: 107x363mm (4-1/4x14-1/4") 45° Miter, L/R: 107x255mm (4-1/4x10")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	898 x 690 x 725 mm (35-1/4 x 27-1/4 x 28-1/2")
Net Weight	30.5 - 31.1 kg (67.2 - 68.6 lbs)
Work Amount (approx.)	70 cuts with BL4040 Melapi thickness 90 mm x width 300 mm at 90° slide cutting

LS004GZ 260 mm (10-1/4")

Cordless Slide Compound Miter Saw

40Vmax



*Recommended batteries
4.0Ah, 4.0Ah (F), 5.0Ah, 8.0Ah



Standard Equipment:
TCT Saw Blade, Dust Bag, Triangular Rule,
Vertical Vise, Hex Wrench

* GZ: Without Charger & Battery



Blade Diameter	260 mm (10-1/4")
Hole Diameter	25.4 mm (1")
Angle	Miter: 60°L / 60°R Bevel: 48°L / 48°R
Max Cutting Capacity	0° Miter: 91 x 279 mm (3-5/8 x 11") 45° Miter, L/R: 91x197 mm (3-5/8 x 7-3/4")
No Load Speed (RPM)	3,600
Dimensions (L x W x H)	805 x 644 x 660 mm (31-1/4 x 25-3/8 x 26")
Net Weight	26.6 - 27.2 kg (58.6 - 60.0 lbs)
Work Amount (approx.)	110 cuts with BL4040 Melapi thickness 60 mm x width 300 mm at 90° slide cutting



LED lamp to cast an exact cutting line



LS003G
305 mm (12")



LS004G
260 mm (10-1/4")

Max. cutting capacity (height x width)
LS003G
92 x 382 mm
LS004G
68 x 310 mm



Smooth cutting



Max. cutting capacity (height x width)

LS003G 92 x 382 mm

LS004G 68 x 310 mm

AWS Auto-start Wireless System

With optional Wireless unit, wireless connection can be made between the tool and AWS-compatible Makita vacuum cleaner for wirelessly enabling tool-triggered dust collection.



Bluetooth

AWS connects to power tool with Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.



Switch to start up vacuum cleaner (via bluetooth technology)



convenient for cleaning after working with this tool.




LED lamp to cast an exact cutting line




LED lamp casts a shadow of the saw blade onto the workpiece as an exact cutting line. By aligning the shadow with the ink line on the workpiece, you can make an exact cut.

Rail-forward design

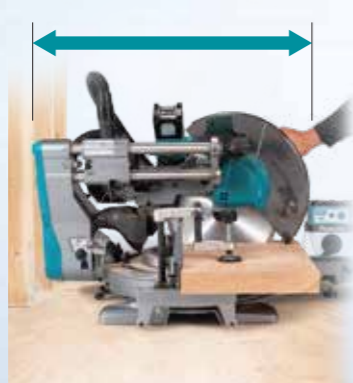

- enables to be placed against a wall for maximizing work space.
- Single sliding system enables smooth operation to produce superior cuts.

high precision cut




- Integrated structure of Guide fence and Lower fence increases the rigidity of Guide fence section, enabling to:
 - 1) minimize misalignment between the faces of Right and Left upper guides to provide increased cutting precision.
 - 2) minimize decrease in cutting precision that might occur during long continuous operation.



- New method of squaring blade to guide fence allows for easy adjustment with high precision, because miter angle is adjusted against guide fence.


Easy locking and release of bevel angle

Bevel angle can be locked/released simply by turning the dial behind the front grip.



Excellent dust collection


When cutting the low thin workpiece, the dust collecting is more effective than current model because of the improved dual dust collecting port.



Easy-to-operate miter angle lock



One-touch sliding lock



Large turn base



Positive stop function can be disabled simply by depressing a lever.

