

Accessories (optional)

Snow-white Makita-blue Black

Nozzle assembly For floor/ carpet

- Part No.
 127825-8
 127827-4
 127828-2



Nozzle assembly For rug / carpet

- Part No.
 198525-7
 198523-1
 198526-5



Nozzle assembly For floor

- Part No.
 123486-2
 123488-8
 123539-7



Flexible hose

Part No. 191E30-3



Flexible hose

- Part No.
 198868-7
 198541-9/ 198545-1
 198547-7



Sheet Nozzle

- Part No.
 199038-1
 199041-2
 199039-9



Round brush

- Part No.
 198878-4
 198555-8



Crevice nozzle 415

Part No. 199439-3



Sash nozzle

- Part No.
 413770-6
 413859-0
 413809-5



Shelf brush

- Part No.
 198873-4
 198540-1



Straight pipe with pipe lock

- Part No.
 459353-8
 459356-2
 458942-6



Long sash nozzle

- Part No.
 198919-6
 198990-0
 198992-6



High performance filter set

Part No. 1910C7-9



Filter H set

Part No. 1910C9-5



Makita Cordless Cleaner
CL003G

XGT
40V Li-ion max



+



CL003GA106 | CL003GA103 | CL003GZ10 | CL003GZ04 | CL003GZ

Cordless Cleaner

40Vmax



*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)

CL003GA103/ GZ04

CL003GA106/ GZ10



CL003GZ

Standard Equipment: Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, High Performance Filter

- GA106: 1x Standard Charger, 1x 2.0Ah Battery (White)
- GA103: 1x Standard Charger, 1x 2.0Ah Battery (Black)
- GZ10 : Without Charger & Battery (White)
- GZ04 : Without Charger & Battery (Black)
- GZ : Without Charger & Battery (Blue)



Capacity	Cyclone Type : 250 mL
Max Air Flow	1.0 m ³ /min
Max Sealed Suction (water column)	20 kPa (2,000 mmH ₂ O)
Suction Power	Mode 4: 100 W 3: 60 W 2: 35 W 1: 15 W
Dimensions (L x W x H)	High performance filter 1,106 x 113 x 177 mm (43-1/2 x 4-7/16 x 7")
Net Weight	1.9 - 2.5 kg (4.2 - 5.5 lbs)
Continuous Usage Time (approx.)	Mode 4: 16 min 3: 25 min 2: 40 min 1: 80 min with BL4025

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my



PRODUCT DETAILS
Models and specs may vary by country.

CL003G



Dust capacity
250 mL

Low noise
54 [Mode 1]
dB(A)
[Mode 4: 65 dB(A)]



Using softer elastomer for the part that fixes fan cover, the vibration of housing is reduced

Achieved by redesigning the exhaust air flow path of the motor to reduce wind noise.


Noise absorbing sponge



New cyclone unit

Filter clogging is suppressed by separating fine dust particles from the air with centrifugal force in the cyclone unit. Thus, the decrease in suction power of the cleaner is minimized.

The amount of dust that can be sucked until filter needs to be cleaned is about 6 times of dust amount suctioned without cyclone unit.

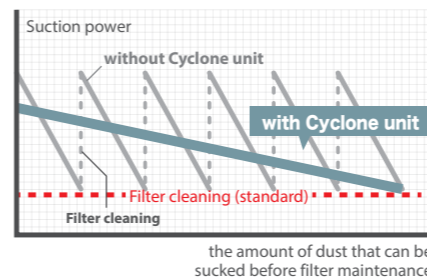


For increased cleaning efficiency, the integrated cyclone unit is positioned above the extension pipe so that it does not hit the floor or surrounding objects when cleaning narrow spaces such as the floor under racks or sofas.



4-mode suction power selection with mode memory function

- The cleaner can memorize a previous power mode and resume vacuuming at the same mode as last time user turned off for user convenience.
- Power mode can be selected before the cleaner is turned on.
- Selected power mode is indicated by 4 green LEDs.

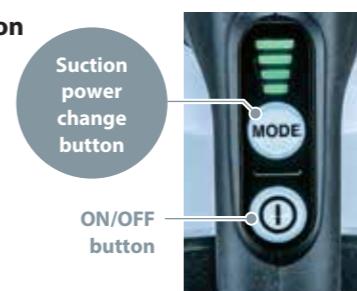

Continuous use
on a full battery charge

Mode	4	3	2	1
	16 min	25 min	40 min	80 min

Battery: BL4025

Max sealed suction

CL003G
21 kPa

Predecessor Model
Model
8.2 kPa

+12.8

Redesigned Floor/ Carpet T-nozzle

- Redesigned structure reduces the resistance caused by suction, providing smooth running.
- Redesigned inside air flow path reduces the noise made inside the nozzle.



Easy filter setting

Filter can be fixed with a single push.



Pipe locking mechanism

Pipe is fixed with the locking mechanism to prevent it from accidentally coming off.



Single LED job light

also functions as a battery capacity warning lamp.



Pipe with beveled end

Cleaning of tight places can be done without nozzle by using the beveled end of pipe as a nozzle.

