

Wide range of accessories available for various applications

Refer to the Accessory Catalogue for the detailed information on the shape, size, recommended use and material of each accessory.

Blade color coding	Wood/Metal	Wood	Metal	Multi Material	Grout Abrasive
Application	Wood/Metal	Wood	Metal	Multi Material	Grout Abrasive

Cutting (plunge cutting)



Applications:
Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.
Benefits:
• Different from jig saws, etc. able to make a plunge cut in the wall for electrical connection box, lighting, exhaust fan, etc.
• The blade can be positioned in twelve different angles to allow easy operation in tight spaces.

Cutting



Applications:
Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.
Benefits:
• Able to perform long distance push cut.
• The segment shape allows flush cutting.

Sanding



Applications:
Wood sanding, concrete sanding, or paint removal, etc. with a wide range of abrasive papers.
Benefits:
• Able to sand in corners.
• Connectable to vacuum cleaners with optional dust extraction system.

Removing grout/ Cutting tiles



Applications:
Replacing walls and floor tiles.
Benefits:
• Less amount of dust scattering thanks to oscillating action.
• The segment shape allows flush cutting.

Scraping



Applications:
Removing mortar, tile adhesive, hardened glue, window putty, caulking, paint, etc.
Benefits:
Low-profile blade with a narrow tip allows easy removal of caulking, window putty, etc.

TM001GZ01

Cordless Multi Tool

• Compatible with STARLOCK/STARLOCK PLUS/STARLOCK MAX.



Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0
*Recommended batteries
2.0Ah, 2.5Ah, 4.0Ah, 4.0Ah (F)
40Vmax

Standard Equipment:
Dust Attachment Set (191R02-6),
STARLOCK Segment Saw 85 TMA045 (B-64799),
STARLOCK Cut Saw 32 TMA047 BIM (B-64814),
STARLOCK Cut Saw 32 TMA059 BIM (B-64939),
STARLOCK Sanding Pad 93 TMA078 (B-65115),
Bow Shape Plunge Cut Saw Blade (B-66400),
Abrasive Paper Delta Red Grit 60,100,150 (10 pcs each Grit)

• GZ01: Without Charger & Battery



Oscillations Per Minute (OPM)	10,000 - 20,000
Oscillation Angle	3.6°
Shank Type	Multi Tool: STARLOCK MAX
Dimensions (L x W x H)	326 x 91.5 x 123 mm (12-7/8 x 3-5/8 x 4-7/8")
Net Weight	2.1 - 3.3 kg (4.6 - 7.3 lbs.)
Work Amount (approx.)	300 cuts with BL4025 38 mm thick SPF

Come with



Makita Cordless Multi Tool
TM001G

XGT
40V Li-ion max

High-speed cutting with low vibration



Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.



Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my

Max. oscillations per minute
20,000 min⁻¹

Vibration level
2.5 m/s² or less



Versatile for various tasks with a wide range of accessories

BL MOTOR High power brushless motor

Max. oscillations per minute **20,000 min⁻¹**



A wide oscillation angle combined with high-speed oscillating motion results in excellent work speed.


Highly efficient and compatible with **STARLOCK MAX** **STARLOCK PLUS**

Combination of high work efficiency and low vibration

AVT
Anti-Vibration Technology

Vibration level **2.5 m/s²**

Dual housing
Dual housing structure with separated vibration and grip sections

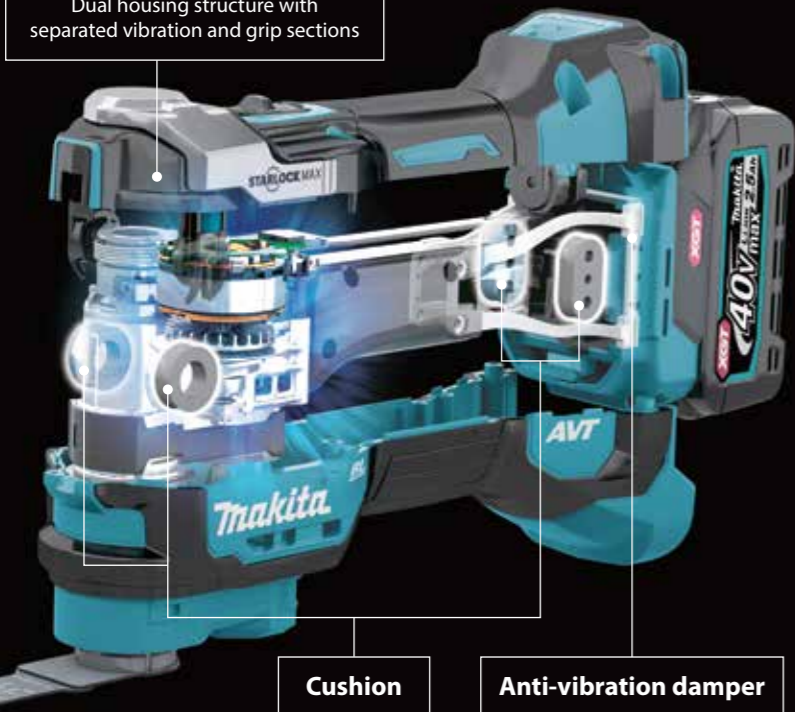

Work amount
Downward plunge cutting (at a pressing load of 25N) into a 38mm thick SPF

300 cuts

[Battery] BL4025 on a single full charge
[Accessory] STARLOCK MAX (MAM001)

The work amount depends to a great extent on the hardness of materials, etc.

High-speed cutting of various materials

Blade color coding					
Application	Wood/Metal	Wood	Metal	Multi Material	Grout Abrasive



Tool-less accessory clamp
Lever style lock system allows for quick installation and replacement of the accessories.



12 angle settings of accessory at every 30° from 0° to 360°



Small diameter grip for easy gripping
Slimmer grip design has been achieved by positioning the motor vertically on the front side.



Deep plunge cutting



Metal flush cutting



Cutting plasterboards



Wood flush cutting



Pocket cutting



Removal of window frame



Door opening work



Compatible with Dust attachment
for use with Sanding pad



Variable speed control by dial **LED job light**
Single LED with afterglow function

- Soft start
- Constant speed control
- Anti-restart function



Cutting PVC, FRP pipes



Cutting window putty, silicone



Routing joints on wall tiles



Sanding and polishing



Copper pipe flush cutting

