



Cordless Chain Saw
DUC258




Lightweight design with excellent maneuverability



Accessories (optional)

Drive sprocket / Guide bar / Saw chain / Guide bar cover / File diameter




Drive sprocket		Guide bar		Saw chain							Bar cover	File diameter	
Pitch/ No. of teeth	Part No.	Bar length	Type	Part No.	No. of drive links	Gauge	Pitch	Cutter type	Type OREGON	Saw chain Part No.	Part No.	1st half of top plate	2nd half of top plate
.325" / 7	1916N6-4	25cm/10"	Sprocket nose bar (Micro-Lite)	191T85-8	46	1.1mm/.043"	.325"	MC	80TXL	191T89-0	413X66-9	4.0mm	4.0mm

File and File holder

The file holder guides sharpening at 30° and controls depth to 4/5 of the file diameter.



Size	Saw chain type	File and File holder Part No.
4.0mm	80TXL	D-70948



Chain oil

Capacity	Part No.
100ml	199897-3
1L	195093-1



DUC258Z 250 mm (10")

Cordless Chain Saw

18V



Standard Equipment:
Guide Bar, Guide Bar Case, Saw Chain, Box Wrench, Round File

* Z- Without Charger & Battery



Guide Bar Length	250 mm (10")
Chain Pitch	0.325 mm (3/8")
Chain Gauge	1.1 (0.043") or 1.3 mm (0.050")
Chain Speed	0 - 24 m/s (0 - 1,440 m/min) (0 - 4,720 FPM)
Chain Oil Tank Volume	140 mL (4.7 oz)
Dimensions (L x W x H)	287 x 181 x 194 mm (11-1/4 x 7-1/8 x 7-5/8")
Net Weight	1.8 kg (4.0 lbs)
Work Amount (approx.)	302 cuts with BL1860B 50 x 50 mm Square cedar timber with 80 TXL saw chain

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my

Lightweight

at **3.0 kg**

With BL1860B, Guide bar
250mm Saw Chain: 80TXL

Performance comparable to

23cc-class
chain saws

Compared to our engine model



PRODUCT
DETAILS
Models and specs
may vary by country

18V
LITHIUM-ION



Lightweight 23cc-class top-handle chain saw with excellent maneuverability

Excellent tool balance with optimal center of gravity

A shorter distance between the top handle and the center of gravity improves balance and reduces arm strain during horizontal cutting.



Comfortable handling with reduced wrist strain



Work amount on a full battery charge

Approx. **302** pcs

With BL1860B, Saw Chain: 80TXL
Cutting 50 x 50 mm square cedar timber



A feeling of tenacity in use



BL MOTOR Outer rotor High-power brushless motor

When the user presses the tool against the material with excessive force, they can feel a decrease in rotation speed, making it easy to adjust the load on the cutting edge.


Saw chain stall load increased by **50%**

* When cutting 100 x 100mm square cedar timber, compared to our 18V model

Excellent acceleration


Enhanced trigger response provides fast acceleration, enabling efficient continuous and repetitive cutting tasks such as pruning.

Chain speed **24.0** m/s

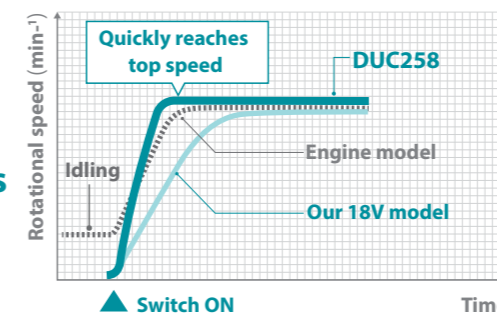


Excellent restartability (when locked)

If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.

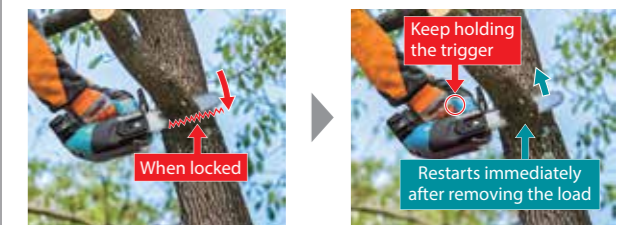


Main power button with enhanced operability

The button provides tactile feedback. The main power lamp and the two-color warning lamp clearly indicate power and error states.

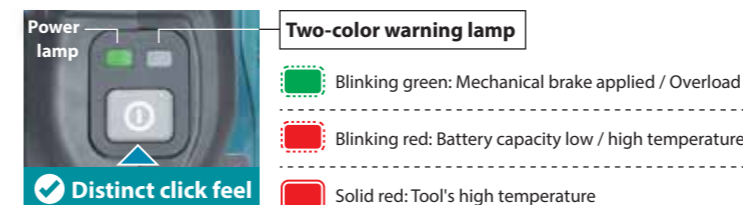

Hook with quick attachment/ detachment

Allows one-handed attachment to and removal from a carabiner or similar devices.

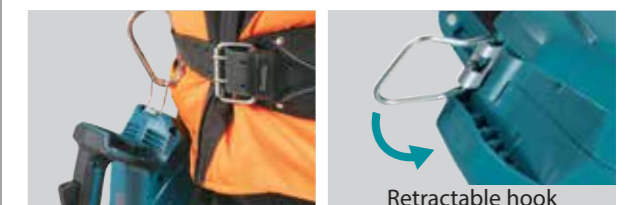

Other features

- **Captive nuts**
Prevents nut loss during guide bar or saw chain replacement.
- **Chain oil view window**
Allows the operator to easily check the oil level.
- **Variable speed trigger**
Allows for speed adjustments based on the material or application.
- **Automatic chain lubrication**
Adjustable automatic chain lubrication with 140 mL oil reservoir.



Water-resistance compatible with XPT