



Angle Grinder

GA7070 180 mm (7") | **GA9070** 230 mm (9")

2,800w power with mechanical brake



GA7070



PRODUCT
DETAILS

Models and specs
may vary by country.



GA9070



PRODUCT
DETAILS

Models and specs
may vary by country.

Continuous Rating Input

2,800 w

(for high voltage areas only)

Straight handle type

GA7070
180 mm (7")

GA9070
230 mm (9")



2,800 W motor with Anti-restart function, AFT and Mechanical brake

Mechanical brake

- Equipped with a mechanical brake, which is interlocked with trigger switch
- High durability achieved by redesigning the brake plate



Large trigger switch

Rotatable main handle can be positioned to suit most cutting and grinding operations.



Low vibration main handle and side handle soft grip for more comfort and control

Straight handle type

GA7070 180 mm (7")
GA9070 230 mm (9")

Accessories (optional)

Wheel cover

for cut-off wheel

GA7070: Part No. 122914-4


GA9070: Part No. 122913-6



AFT

Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

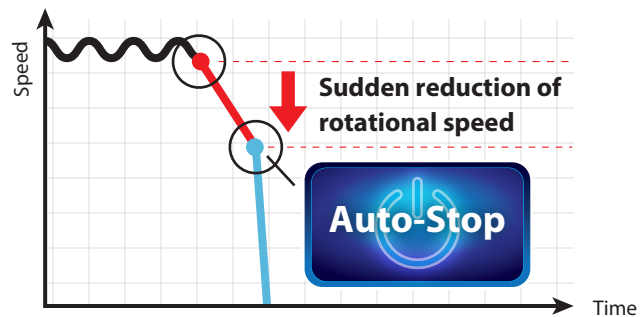

GA7070 180 mm (7")

224 W

Angle Grinder

• Motor more durable for heavy duty applications.



7"

Trigger Switch

Standard Equipment:
Anti-Vibration Grip, Wheel Cover,
Lock Nut Wrench



Continuous Rating Input 2,800 W

Wheel Diameter 180 mm (7")

Wheel Hole Diameter 22.23 mm (7/8")

Max Wheel Thickness 7.2 mm (1/4")

No Load Speed (RPM) 8,500

Dimensions (L x W x H) 506 x 200 x 146 mm
(20 x 7-7/8 x 5-3/4")

Net Weight 6.1 - 6.6 kg
(13.5 - 14.6 lbs)

Power Supply Cord 2.5 m (8.2 ft)

GA9070 230 mm (9")

224 W

Angle Grinder

• Motor more durable for heavy duty applications.



9"

Trigger Switch

Standard Equipment:
Anti-Vibration Grip, Wheel Cover,
Lock Nut Wrench



Continuous Rating Input 2,800 W

Wheel Diameter 230 mm (9")

Wheel Hole Diameter 22.23 mm (7/8")

Max Wheel Thickness 6.5 mm (1/4")

No Load Speed (RPM) 6,600

Dimensions (L x W x H) 506 x 250 x 146 mm
(20 x 9-7/8 x 5-3/4")

Net Weight 6.3 - 8.5 kg
(13.9 - 18.7 lbs)

Power Supply Cord 2.5 m (8.2 ft)

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No.12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya.
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Jalan Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

FOLLOW MAKITA MALAYSIA:



www.makita.my