



Job Site Radio

MR006G 40Vmax / 18V / 12Vmax / AC



MR006G

PRODUCT
DETAILS
Models and specs
may vary by country



40V LI-ION
max



High Quality Sound

With midrange / treble speakers on both sides and woofer on the bottom for deeper and richer sound

7 Selectable sound modes

- Sound mode can be selected to suit the music genre.
- MY EQ (my equalizer) mode enables to independently adjust treble, midrange and bass for a desired sound quality.
- LED color indicates the selected sound mode.

Equalizer	LED
FLAT	White
JAZZ	Blue
ROCK	Red
CLASSIC	Brown
POP	Pink
NEWS	Yellow
MY EQ	Green



Carry handle with built in FM antenna

- Swivels 90 degrees
- Features soft grip




Black panel with illuminated letters



Dust and shower-proof construction: IP65

For use in outdoor applications or harsh environments

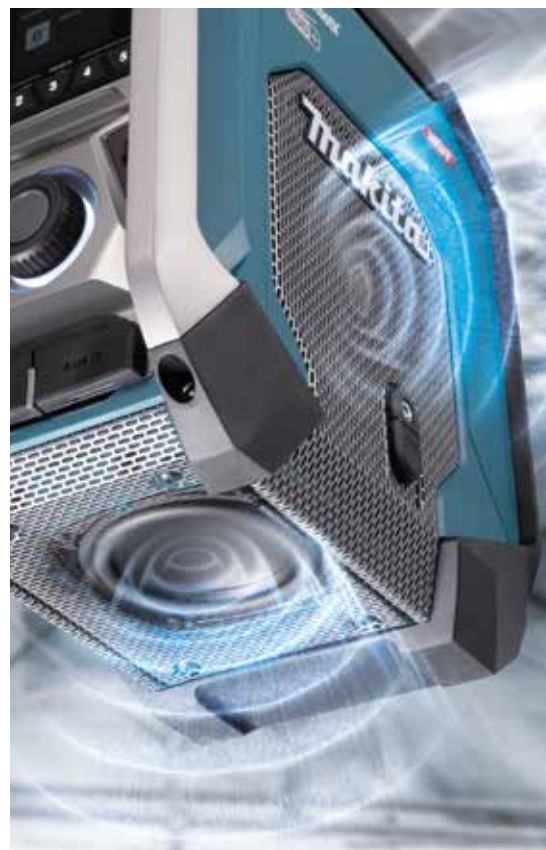

AUX-IN jack

used as a stereo speaker by connecting to external audio source with a commercial connecting cable.



USB output port

- allows for charging a mobile device.
- Type A USB socket for DC5V/ 2.4A USB output

Dual power sources

Runs on AC adapter or Makita rechargeable Li-ion batteries.



AC adapter jack



Bluetooth ** With a range of 10m (33ft); up to 30m (100ft) in good radio conditions

equipped with Bluetooth class 2** to wirelessly play music from a mobile device.

MR006GZ

Frequency Band	FM: 87.5 - 108 MHz AM: 522 - 1,710 kHz
Speaker Size	Sides: Dia. 63.5 mm x2 Bottom: Dia. 101.6 mm
Bluetooth	Version: 5.0 Supported Code: SBC Profile: A2DP / SCMS-T / AVRCP Max Transmission Range (Optimum): 10m (33ft) Max Transmission Range (Possible): 30m (98ft) Transmission Power Class: 2 Compatible Bluetooth Profile: A2DP
Dimensions (L x W x H)	285x172x305 mm (11-1/4x6-3/4x12")
Net Weight	5.6 - 6.4kg (12.3 - 14.1lbs.)
Continuous Usage Time (approx.)	19 hrs with BL4040

40V^{max} *Recommended batteries 2.0Ah, 2.5Ah, 4.0Ah



Standard Equipment
AC Adaptor, AA Battery

Available Option
GZ: Without Charger & Battery

Like us on Facebook
MAKITA MALAYSIA

* Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachments), including the battery cartridge. All pictures shown are for illustration purposes only. In the event of differences arising between the English, Bahasa Malaysia and Chinese versions, the English version shall prevail. Masa Penggunaan Beterusan/ Jumlah Kerja: Prestasi sebenar mungkin berbeza mengikut aplikasi. Spesifikasi standard mungkin berbeza mengikut negara. Berat bersih dan dimensi berbeza bergantung pada jenis bateri yang digunakan. Imej yang ditunjukkan hanya untuk tujuan ilustrasi sahaja. Jika terdapat perbezaan antara bahasa, maka maklumat versi Bahasa Inggeris harus digunakan. 连续使用时间/ 工作量: 实际表现可能因应用情况而异。注: 规格可能因销往国家之不同而异。重量与尺寸因附件(包括电池组)而异。图片仅供参考, 如果内容有任何差异或不一致, 概以英文版本为准。

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre
总部和服务与展示中心
Lot 824, Jalan Subang 5, Subang Industrial Area,
47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre
柔佛 (新山) 服务与展示中心
No. 12 & 14, Jalan Rosmerah 2/9,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre
砂拉越 (古晋) 服务与展示中心
Lot 1227, Lorong Demak Indah 2A,
Demak Laut Industrial Area, Phase 2A,
93050 Kuching, Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre
沙巴 (亚庇) 服务与展示中心
Lot 19, Jalan Buah Duku,
Kolombong Light Industrial Estate, Off Kolombong,
Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279

12 MONTHS WARRANTY
Waranti 12 bulan • 12 个月保修期



www.makita.my
makita@makita.my