





















Accessories (optional)

 <p>Cyclone jet nozzle set Part No. 197824-4 A spiral jet is ejected. Suitable for removing stubborn dirt.</p>	 <p>Cyclone guard set Part No. 197864-2 Reduces splash back when cleaning corners with the cyclone jet nozzle.</p>	 <p>Extension pipe set Part No. 197870-7 Pipes to extend the length of the trigger gun. Three different lengths are available by changing the number of the pipes to be used.</p>	 <p>Trigger gun set Part No. 197842-2</p>	 <p>High pressure extension hose Part No. 197845-6 (5 m) Part No. 197847-2 (8 m) Part No. 197850-3 (10 m) Extension hose to connect the high pressure washer body with the trigger gun.</p>
 <p>Variospray nozzle set Part No. 1912Y4-1 Variospray nozzle ext. set Part No. 1912Y5-9 Jet pressure can be adjusted by rotating the nozzle.</p>	 <p>Variospray lance set Part No. 1912Y6-7 Jet pressure can be adjusted by rotating the nozzle.</p>	 <p>Accessory joint set Part No. 197853-7 A joint to connect with a nozzle from other model.</p>	 <p>High pressure hose Length: 5 m Part No. 126766-5</p>	 <p>Twist prevention joint set Part No. 197867-6 Prevents the high-pressure hose from being twisted.</p>
 <p>Variable nozzle set Part No. 197822-8 Jet width can be adjusted from 0° to 25° by rotating the front end of the nozzle.</p>	 <p>Foam nozzle set Part No. 1912Y2-5 Detergent can be sprayed as foam.</p>	 <p>Absorption connector G3/4 with filter Part No. 122F22-7</p>	 <p>One touch joint set Part No. 197883-8 For commercial hose connection</p>	 <p>Hose assembly set Length: 3 m Part No. 1910R1-6 Part No. 1914A2-9 A hose assembly to connect a faucet to the product, or the strainer assembly to the product.</p>
 <p>Wash brush set Part No. 197828-6 A nozzle equipped with a brush. Useful for washing out dirt while scrubbing with brush.</p>	 <p>Rotating brush set Part No. 197831-7 Three brushes inside rotate slowly when ejecting the jet. Suitable for cleaning light dirt on an exterior wall, car body, bath tub, etc.</p>	 <p>Pipe cleaning hose Part No. 197837-5 (10 m) Part No. 197840-6 (15 m) For cleaning and unclogging plumbing and downpipes.</p>	 <p>Strainer assembly set Part No. 1910R2-4 A strainer assembly to supply water from a tank or reservoir. Use the hose assembly to connect to the product.</p>	 <p>Self-suction hose set Part No. 197873-1 Replace the water hose with this set to supply water from a tank or reservoir.</p>

HW001GZ

Cordless High Pressure Washer

• Large diameter wheels; equipped with 140 mm diameter wheels, allowing for good mobility even on bumpy road surfaces.



Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0
*Recommended batteries
4.0Ah (F), 5.0Ah, 8.0Ah
40Vmax

Standard Equipment:
Trigger Gun Set, High Pressure Hose 5 m, Strainer Assembly Set, Absorption Connector G3/4, Variospray Nozzle Set, Extension, Variospray Lance Set, Cyclone Jet Nozzle Set, Hose Assembly Set

• GZ: Without Charger, Battery & Carrying Case



Max Permissible Pressure	11.5 MPa (115 Bar)
Regular Pressure	Mode 1: 3.0 MPa Mode 2: 5.5 MPa Mode 3: 8.5 MPa
Max Water Flow	7.0L/min
Regular Flow	Mode 1: 3.0 L/min Mode 2: 4.2 L/min Mode 3: 5.5 L/min
Pump Speed (RPM)	Model 1: 1,870 Mode 2: 2,580 Mode 3: 3,350
Max Feed Temperature	40 °C
Max Suction Height	1 m
Dimensions (L x W x H)	334 x 383 x 520 mm (13-1/2 x 15-1/8 x 20-1/2")
Net Weight	10.3 - 13.4 kg (22.7 - 29.5 lbs)
Continuous Usage Time (approx.)	60 min (Mode 1) 30 min (Mode 2) 18 min (Mode 3) with BL4050F x2

Like us on Facebook
MAKITA MALAYSIA

• Continuous Usage Time/ Work Amount: Actual performance may vary based on application. Items of standard equipment and specifications may vary by country or area. The weight and dimensions may differ depending on the attachment(s), including the battery cartridge. All pictures shown are for illustration purposes only.

Makita Power Tools (Malaysia) Sdn. Bhd. Co. Registration No.: 201301001778 (1031615-M)

HQ & Service Centre

Lot 824, Jalan Subang 5, Subang Industrial Area, 47500 Subang Jaya, Selangor.
Tel: 03-8023 0824 (General) | Fax: 03-8022 1448
03-8022 1443 (Service)

Johor (Johor Bahru) Service Centre

No. 12 & 14, Jalan Rosmerah 2/9, Taman Johor Jaya, 81100 Johor Bahru, Johor.
Tel: 07-364 9406 | Fax: 07-364 9407

Sarawak (Kuching) Service Centre

Lot 1227, Lorong Demak Indah 2A, Demak Laut Industrial Area, Phase 2A, 93050 Kuching Sarawak.
Tel: 082-496 800 | Fax: 082-496 900

Sabah (Kota Kinabalu) Service Centre

Lot 19, Jalan Buah Duku, Kolombong Light Industrial Estate, Off Jalan Kolombong, Kolombong Zone 1, 88450 Inanam, Kota Kinabalu, Sabah.
Tel: 088-388 278 | Fax: 088-388 279



www.makita.my
makita@makita.my

Makita Cordless High Pressure Washer HW001G



XGT
40V Li-ion max



PRODUCT DETAILS
Models and specs may vary by country.



Max. permissible pressure

11.5 MPa

12 MONTHS WARRANTY




Two in parallel or one

Good mobility and transportability



Large diameter wheels

Equipped with $\phi 140\text{mm}$ wheels, allowing for good mobility even on bumpy road surfaces.

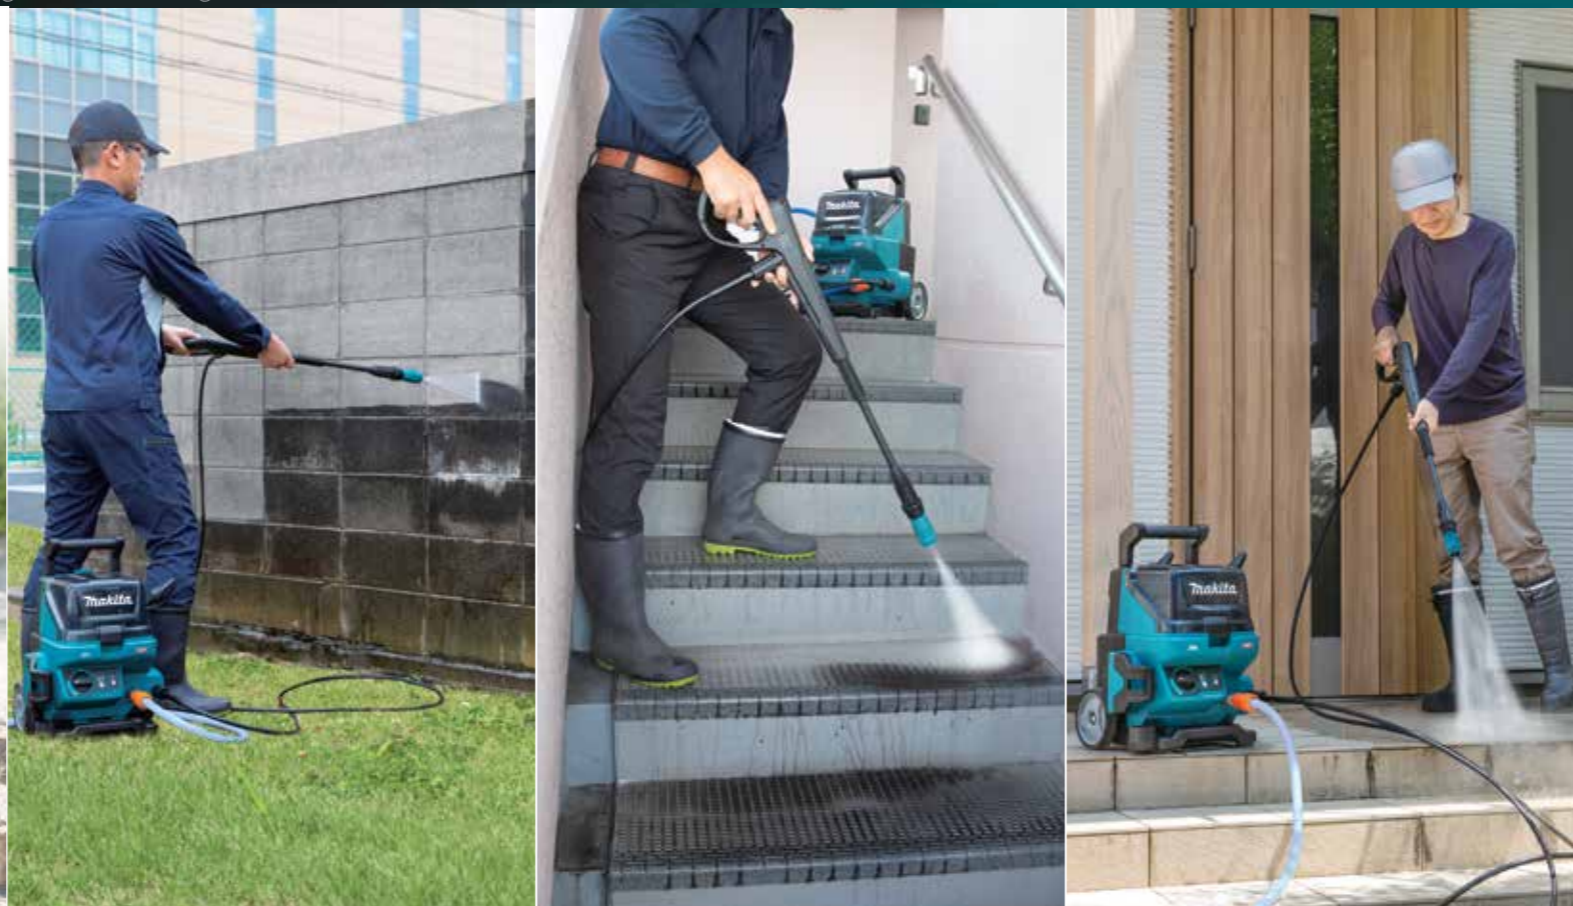

BL
MOTOR

High power
brushless motor

IPX5

rated for weather and water resistance



Telescopic handle

for easy transportation and storage



3 operation modes; operation mode can be selected to suit the contamination degree of the object to be cleaned.

Self-priming function

- Water can be supplied not only from faucet but also from water reservoirs, such as poly tanks, large buckets, using this function.
- Max suction height: 1m
- Minimal water level: 15mm
- No need to operate air drain valve



Max permissible pressure **11.5** MPa

3 operation modes

Mode With Vario-spray nozzle	Mode 3	Mode 2	Mode 1
Regular pressure	8.5Mpa	5.5Mpa	3.0Mpa
Regular flow rate	5.5L/min	4.2L/min	3.0L/min
Continuous use*	18min	30min	60min
Examples of recommended work	Washing of building exterior, etc.	Washing of vehicles, farm equipment, etc.	Light washing work

* (approx) on fully charged batteries (with two BL4050F batteries)



Accessory storage

Side section: Trigger gun
Rear section: High pressure hose, Foam nozzle, Lance



NEW Foam nozzle set

- New foam nozzle with improved foaming performance
- Bottle capacity: 350mL

